

IC-F3100D series

CONTENTS

REPLACEMENT PAGES	1-1, 1-2, 5-6, 7-1 and 7-2
PARTS LIST	1
BOARD LAYOUTS	6
VOLTAGE DIAGRAM	8

[UNIT LIST]

Model	Version Number	Version	Channel spacing (kHz)
IC-F3101D	[#02]	USA-11	6.25/12.5
IC-F3102D	[#07]	EUR-11	6.25/12.5/20.0/25.0
	[#08]	UK-11	6.25/12.5/25.0
	[#51]	DPM-01	6.25/12.5/20.0/25.0
	[#52]	DPM-02	6.25/12.5/25.0
IC-F3103D	[#53]	DPM-01	
	[#13]	EXP-11	
	[#14]	EXP-12	
	[#18]	AUS-11	
IC-F3106D	[#19]	RUS-11	
IC-F3108D	[#20]	CHN-11	

SECTION 1**SPECIFICATIONS****[VERSION LIST]**

Model	Version Number	Version
IC-F3101D	[#02]	USA-11
IC-F3102D	[#07]	EUR-11
	[#08]	UK-11
	[#51]	DPM-01
	[#52]	DPM-02
	[#53]	DPM-01
IC-F3103D	[#13]	EXP-11
	[#14]	EXP-12
	[#18]	AUS-11
IC-F3106D	[#19]	RUS-11
IC-F3108D	[#20]	CHN-11

■ GENERAL

Frequency range	136–174 MHz		
Number of conventional channels	16		
Type of emission	For [#13], [#14], [#18], [#19], [#20] and [#53]	Wide	16K0F3E (30.0 kHz/25.0 KHz)
		Narrow	11K0F3E 11K0F7E, D (15.0 kHz) 8K50F3E 8K10F1E, D (12.5 kHz)
		Digital	4K00F1E, D (6.25 kHz)
	For only [#02]	Narrow	8K50F3E (12.5 kHz)
		Digital	4K00F1E, D (6.25 kHz)
	For [#07], [#08], [#51] and [#52]	Wide	16K0F3E (25.0 KHz)
		Middle	14K0F3E (20.0kHz)
		Narrow	8K50F3E (12.5 kHz)
		Digital	4K00F1E, D (6.25 kHz)
Antenna impedance	50 Ω (nominal)		
Operating temperature range	For [#02], [#13], [#14], [#18], [#19], [#20] and [#53]	–30°C to +60°C (–22°F to +140°F)	
	For [#07], [#08], [#51] and [#52]	–25°C to +55°C (–13°F to +131°F)	
Power supply voltage	Specified Icom's battery packs only (7.5 V DC; negative ground)		
Current drain (approximately)	Receiving 90 mA (stand-by) 400 mA (maximum audio, with internal speaker) Transmitting 1.3 A (at 5 W)		
Dimensions (projections not included)	58.0(W)×111.5(H)×36.5(D) mm; 2.3(W) × 4.4(H) × 1.4(D) in		
Weight (approximately)	150 g; 5.3 oz.		
	320 g; 12.6 oz. (including MB-124, BP-265 and FA-SC55V)		

■ TRANSMITTER

Output power	5 W	
Modulation	Variable reactance frequency modulation	
Maximum frequency deviation	Narrow ± 2.5 kHz Middle ± 4.0 kHz Wide ± 5.0 kHz	
Frequency stability	± 2.5 ppm	
Spurious emissions	For [#02], [#13], [#14], [#18], [#19], [#20] and [#53]	70 dB minimum
	For [#07], [#08], [#51] and [#52]	0.25 μ W (≤ 1 GHz), 1.0 μ W (>1 GHz)
Adjacent channel power	Narrow 60 dB minimum, 71 dB typical Middle 70 dB minimum, 74 dB typical Wide 70 dB minimum, 75 dB typical	
Audio harmonic distortion (at 40% deviation)	Narrow 0.8% typical Middle 0.8% typica Wide 0.5% typical	
FM hum and Noise (without CCITT Filter)	For [#02], [#13], [#14], [#18], [#19], [#20] and [#53]	Narrow 34 dB minimum, 46 dB typical Wide 40 dB minimum, 52 dB typical
Residual modulation (with CCITT Filter)	For [#07], [#08], [#51] and [#52]	Narrow 40 dB minimum, 50 dB typical Middle 43 dB minimum, 54 dB typical Wide 45 dB minimum, 56 dB typical
Limiting charact of modulator	60–100% of maximum deviation	
Input impedance (MIC)	2.2 k Ω	

■ RECEIVER

Sensitivity	Analog	For [#02], [#13], [#14], [#18], [#19], [#20] and [#53]	0.23 μ V typical at 12 dB SINAD
		For [#07], [#08], [#51] and [#52]	–4.0 dB μ Vemf typical at 20 dB SINAD
	Digital	–8.0 dB μ Vemf typical at 5% BER	
Squelch sensitivity (at threshold)	For [#02], [#13], [#14], [#18], [#19], [#20] and [#53]		0.22 μ V typical
	For [#07], [#08], [#51] and [#52]		–7 dB μ V (EMF) typical
Intermediate frequency	1st IF; 46.35 MHz, 2nd IF; 450 kHz		
Adjacent channel selectivity	Narrow 60 dB minimum, 71 dB typical Middle 70 dB minimum, 74 dB typical Wide 70 dB minimum, 77 dB typical		
Spurious response	70 dB minimum, 91 dB typical		
Intermodulation	For [#02], [#13], [#14], [#18], [#19], [#20] and [#53]		70 dB minimum, 75 dB typical
	For [#07], [#08], [#51] and [#52]		65 dB minimum, 74 dB typical
FM hum and Noise (without CCITT Filter)	For [#02], [#13], [#14], [#18], [#19], [#20] and [#53]	Narrow 34 dB minimum, 42 dB typical Wide 40 dB minimum, 48 dB typical	
(with CCITT Filter)	For [#07], [#08], [#51] and [#52]	Narrow 40 dB minimum, 48 dB typical Middle 43 dB minimum, 51 dB typical Wide 45 dB minimum, 53 dB typical	
Audio output power	0.8 W typical at 5% distortion with 12 Ω load (internal speaker) 0.4 W typical at 5% distortion With 8 Ω (external speaker)		
Audio output impedance	8 Ω		


Measurements made in accordance with TIA-603.

All stated specifications are subject to change without notice or obligation.

5-3 TRANSMIT ADJUSTMENTS (Continued)

1) Select an adjustment item using [↑]/[↓] on the PC's keyboard.

2) Set or modify the adjustment value as specified using [←]/[→] on the PC's keyboard, then push [ENTER].

ADJUSTMENT		TRANSCIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
MODULATION BALANCE	1	• Channel : 1-5 • Transmitting	• Set [MOD(NARROW)] to "80" on the "Adjust Utility" screen.	[MOD(NARROW)]	80
	2	• Channel : 1-6 • Transmitting	• Set the TX mode to "2" on the "ADJUSTMENT UTILITY" screen.	[TX MODE]	2
	3	• Channel : 1-7 • Transmitting	• Push [ENTER] on the PC's keyboard, to enter the modulation balance adjustment mode.	[BAL Start]	—
-Band low-	4	• Channel : 1-5 • Transmitting	• Connect a modulation analyzer with an oscilloscope to the antenna connector through an attenuator, and set it as; HPF : OFF LPF : 15 kHz De-emphasis : OFF Detector : (P-P)/2	[BAL 1]	As flat as possible.  No over or under shoot
-Band center-	5	• Channel : 1-6 • Transmitting		[BAL 2]	
-Band high-	6	• Channel : 1-7 • Transmitting		[BAL 3]	
	7		• Push [ENTER] on the PC's keyboard, to store the value and quit the modulation balance adjustment mode.	[BAL Start]	—
FM DEVIATION (Narrow)	1	• Channel : 1-4 • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[MOD (Narrow)]	±2.05 to ±2.15 kHz ^{*1} ±2.10 to ±2.20 kHz ^{*2}
(Wide)	2	• Channel : 1-6 • Transmitting	• Connect as audio generator to the [MIC] jack, and set it as; Frequency : 1 kHz Waveform : Sine wave Level : 150 mVrms	[MOD (Wide)]	±4.05 to ±4.15 kHz ^{*1} ±4.20 to ±4.30 kHz ^{*2}
(Middle)	3	• Channel : 1-4 • Transmitting		[MOD (Middle)]	±3.25 to ±3.35 kHz ^{*1} ±3.35 to ±3.45 kHz ^{*2}
DIGITAL DEVIATION (Narrow)	1	• Channel : 1-9 • Transmitting	1) Set the TX mode to "16" on the "ADJUSTMENT UTILITY" screen. 2) Push [ENTER] on the PC's keyboard, to enter the digital deviation adjustment mode.	[MOD D Start]	—
	2		• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[MOD D L]	±1.36 to ±1.40 kHz
	3	• Channel : 1-10 • Transmitting	• Connect as audio generator to the MIC jack, and set it as; Frequency : 1 kHz Waveform : Sine wave Level : 150 mVrms	[MOD D C]	
	4	• Channel : 1-11 • Transmitting		[MOD D H]	
	5		• Push [ENTER] on the PC's keyboard, to store the value and quit the digital deviation adjustment mode.	[MOD D Start]	—
CTCSS DEVIATION (Wide)^{*3}	1	• Channel : 1-12 • No AF input from the MIC. • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[CTCSS]	±0.65 to ±0.75 kHz
(Narrow)^{*4}	2	• Channel : 1-13 • Transmitting			±0.30 to ±0.40 kHz
DTCS DEVIATION (Wide)^{*3}	1	• Channel : 1-14 • No AF input from the MIC. • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[DTCS]	±0.65 to ±0.75 kHz
(Narrow)^{*4}	2	• Channel : 1-15 • Transmitting			±0.30 to ±0.40 kHz
2/5 TONE, DTMF DEVIATION	1	• Channel : 1-16 • Transmitting	1) Set the TX mode to "5" on the "ADJUSTMENT UTILITY" screen. 2) Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[S.Tone]	±1.45 to ±1.55 kHz

^{*1}: For all models except [EUR], [UK], [DPM]. ^{*2}: For [EUR], [UK] [DPM]. ^{*3}: For all models except [USA]. ^{*4}: For only [USA].

SECTION 7**MECHANICAL PARTS****[UNIT LIST]**

Model	Version Number	Version
IC-F3101D	[#02]	USA-11
IC-F3102D	[#07]	EUR-11
	[#08]	UK-11
	[#51]	DPM-01
	[#52]	DPM-02
IC-F3103D	[#53]	DPM-01
	[#13]	EXP-11
	[#14]	EXP-12
	[#18]	AUS-11
	[#19]	RUS-11
IC-F3106D	[#19]	RUS-11
IC-F3108D	[#20]	CHN-11

[CHASSIS PARTS]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
J1	6910021491	ANT CONNECTOR 106-1 <SSC>	1
SP1	2510001560	045P01202-02	1
W1	8900009640	OPC-963	1
MP1	8010022041	3286 CHASSIS-1 2X2	[#02] 1
	8010022041	3286 CHASSIS-1 2X2	[#07] 1
	8010022041	3286 CHASSIS-1 2X2	[#08] 1
	8010022041	3286 CHASSIS-1 2X2	[#13] 1
	8010022041	3286 CHASSIS-1 2X2	[#14] 1
	8010022041	3286 CHASSIS-1 2X2	[#18] 1
	8010022041	3286 CHASSIS-1 2X2	[#19] 1
	8010021951	3285 CHASSIS (A)-1 NI-P 2X2	[#20] 1
	8010022041	3286 CHASSIS-1 2X2	[#51] 1
	8010022041	3286 CHASSIS-1 2X2	[#52] 1
	8010022041	3286 CHASSIS-1 2X2	[#53] 1
MP2	8210026490	3328 FRONT PANEL ASSEMBLY	1
MP10	8930082160	3285 NAME SHEET (A)	1
MP11	8930081140	3328 LENS	1
MP12	8930080620	O-RING (CF) <KRI>	1
MP13	8930080630	3285 SP PLATE Y1174	1
MP14	8930042350	1922 MIC SHEET	1
MP15	8930080410	3285 MIC SPONGE	1
MP16	8930079900	3285 TERMINAL HOLDER	1
MP17	8930080100	3285 PLUS TERMINAL	1
MP18	8930080400	3285 MINUS TERMINAL	1
MP19	8930084910	THERMAL SHEET (CB)TC200CAT20 (7.9X7.9	1
MP20	8830003390	VR NUT (AB)	2
MP21	8930080092	3285 SIDE PLATE-2 Y1173B	1
MP22	8930080150	3285 SIDE SEAL <KRI>	1
MP23	8930080140	3285 TOP SEAL <KRI>	1
MP24	8830003440	3285 ANT NUT	1
MP25	8610014180	KNOB N-389	1
MP27	8610014190	KNOB N-390	1
MP31	8810008761	PHBT M2 X 8 NI-ZC3	2
MP32	8810009511	PHBT M2 X 4 NI-ZC3 (3.6-4.0)	9
MP33	8810009511	PHBT M2 X 4 NI-ZC3 (3.6-4.0)	1
MP34	8810009181	BT M2 X 5 NI-ZC3	2
MP35	8930066240	SPONGE (IM)	1

*: Refer to "BOARD LAYOUTS" for the location.


Screw abbreviations A, B0, BT: Self-tapping PH: Pan head ZK: Black NI-ZU: Nickel-Zinc SUS: Stainless

[MAIN-A UNIT]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
J51*	6450000131	HSJ1102-018540	1
J52*	6450002250	HSJ1456-010320	1
J53*	6510021901	BM02B-ASRS-TF (LF) (SN)	1
F51*	5210001160	ERBRE3R00V	1
MC51	7700002950	EM9745P-33-G <HOR>	1
S51	2260001900	SW-149 (SKHLLD)	1
S52*	2260002800	SW-167 (SKQTLAE010)	1
S53*	2260002800	SW-167 (SKQTLAE010)	1
S54	2250000830	FSR08-0008A <SLVJ>	1
MP2	8510016461	2775 VCO COVER-1	1
MP3*	8510016471	2775 VCO CASE-1	1
MP4*	6910014760	OG-503040	1
MP5*	6910014760	OG-503040	1
MP8	8510020110	3328 SHIELD PLATE Y1222	1
MP9*	8510019920	3328 DSP CASE Y1212	1
MP10	8510019930	3328 DSP COVER Y1213	1
MP11*	6910014760	OG-503040	1
MP12	8930082300	DOUBLE SIDE TAPE (BK)	1
MP13	8930082310	3328 K-PLATE Y2158	1
MP16*	6910014760	OG-503040	1

[ACCESSORIES]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
EP1	(Optional)	FA-SC55V-2	1
EP2	(Optional)	BP-265	[#02] 1
	(Optional)	BP-265	[#07] 1
	(Optional)	BP-265	[#08] 1
	(Optional)	BP-265	[#13] 1
	(Optional)	BP-265	[#14] 1
	(Optional)	BP-265	[#18] 1
	(Optional)	BP-265	[#19] 1
	(Optional)	BP-265	[#51] 1
	(Optional)	BP-265	[#52] 1
	(Optional)	BP-265	[#53] 1
EP3	(Optional)	BC-193	[#02] 1
	(Optional)	BC-193	[#07] 1
	(Optional)	BC-193	[#08] 1
	(Optional)	BC-193	[#13] 1
	(Optional)	BC-193	[#14] 1
	(Optional)	BC-193	[#18] 1
	(Optional)	BC-193	[#19] 1
	(Optional)	BC-193	[#51] 1
	(Optional)	BC-193	[#52] 1
	(Optional)	BC-193	[#53] 1
EP4	(Optional)	BC-123SA	[#02] 1
EP4	(Optional)	BC-123SE	[#07] 1
EP4	(Optional)	BC-123SA	[#13] 1
EP4	(Optional)	BC-123SE	[#14] 1
EP4	(Optional)	BC-123SV	[#18] 1
	(Optional)	BC-123SE	[#19] 1
EP4	(Optional)	BC-123SE	[#51] 1
	(Optional)	BC-123SA	[#53] 1
MP1	(Optional)	MB-124	[#02] 1
	(Optional)	MB-124	[#07] 1
	(Optional)	MB-124	[#08] 1
	(Optional)	MB-124	[#13] 1
	(Optional)	MB-124	[#14] 1
	(Optional)	MB-124	[#18] 1
	(Optional)	MB-124	[#19] 1
	(Optional)	MB-124	[#51] 1
	(Optional)	MB-124	[#52] 1
	(Optional)	MB-124	[#53] 1
MP2	8210025840	3285 JACK PANEL	1
MP3	8810004861	PH M2 X 6 ZK3	2

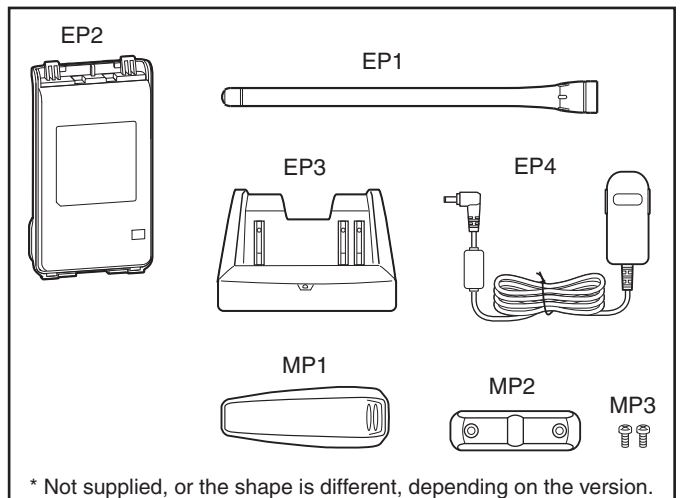

*: Refer to “**BOARD LAYOUTS**” for the location.

Screw abbreviations A, B0, BT: Self-tapping PH: Pan head ZK: Black NI-ZU: Nickel-Zinc SUS: Stainless

PARTS LIST

[UNIT LIST]

Model	Version Number	Version
IC-F3101D	[#02]	USA-11
IC-F3102D	[#07]	EUR-11
	[#08]	UK-11
	[#51]	DPM-01
	[#52]	DPM-02
IC-F3103D	[#53]	DPM-01
	[#13]	EXP-11
	[#14]	EXP-12
	[#18]	AUS-11
IC-F3106D	[#19]	RUS-11
IC-F3108D	[#20]	CHN-11

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110002751	S.IC TA75S01F(TE85RF)	T	32.5/8.9
IC2	1110007920	S.IC SC-1445-E2	B	72.5/29.4
IC3	1110007320	S.IC NJM2591V-TE1-#ZZZB	B	45.8/38.9
IC4	1130015271	S.IC AK1541P4-L	T	43.2/24.0
IC5	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	68.3/44.2
IC6	1130011741	S.IC TC7W66FK(TE85LF)	B	64.3/32.1
IC51	1140015010	S.IC HD64F2506RBR26DV(EMPTY)	B	83.0/14.3
IC52	1130015080	S.IC R1EX24512ASAS0A	T	83.7/16.5
IC53	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	T	85.0/11.3
IC54	1180003600	S.REG NJM2871BF05-TE1-#ZZZB	T	15.5/34.9
IC55	1110007610	S.IC TPA0211DGNR	B	13.3/42.1
IC58	1110002751	S.IC TA75S01F(TE85RF)	T	23.9/28.3
IC65	1180003670	S.REG BD9141MUV-E2	T	96.5/9.1
IC900	1180003680	S.REG TP562204DBVR	T	76.4/39.0
IC901	1190002900	S.IC ADS7886SDCKR	T	77.6/32.4
IC903	1140013290	S.IC TMS320VC5509AZHH <FE>	T	86.8/36.8
IC904	1130015620	S.IC EN25Q40-100GIP <MSK>	T	78.1/28.4
IC905	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	80.2/46.0
Q1	1560001700	S.FET RD07MUS2B-T112	B	28.6/13.5
Q2	1560001241	S.FET RD01MUS1-T113	B	36.3/14.4
Q3	1530003311	S.TRA 2SC5107-O(TE85RF)	B	42.2/13.1
Q5	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	67.7/37.6
Q6	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	35.6/5.7
Q8	1530003311	S.TRA 2SC5107-O(TE85RF)	T	54.8/18.5
Q9	1530003311	S.TRA 2SC5107-O(TE85RF)	B	52.7/19.9
Q10	1530003311	S.TRA 2SC5107-O(TE85RF)	T	60.7/18.5
Q11	1590004070	S.TRA LDTC144EET1G <SLVJ>	B	53.4/23.2
Q12	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	62.7/23.3
Q13	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	57.5/23.6
Q14	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	60.0/23.6
Q15	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	64.3/18.6
Q16	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	66.6/33.4
Q17	1560000541	S.FET 2SK880-Y(T5RICOMF)	B	48.2/31.0
Q21	1560000841	S.FET 2SK1829(TE85RF)	B	28.4/30.5
Q22	1580000731	S.FET 3SK293(TE85LF)	B	25.1/27.8
Q23	1580000731	S.FET 3SK293(TE85LF)	B	36.4/26.1
Q24	1530003311	S.TRA 2SC5107-O(TE85RF)	B	38.3/42.6
Q26	1530002851	S.TRA 2SC4116-BL(TE85RF)	T	43.3/32.7
Q27	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	56.3/35.9
Q28	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	63.6/44.7
Q29	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	38.5/42.6
Q51	1510001090	S.TRA KTA2015Y-RTK/P	B	25.7/43.5
Q52	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	24.6/39.8
Q58	1590004220	S.TRA DRA9123YOL	B	54.9/7.1
Q59	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	49.1/17.3
Q63	1520000460	S.TRA 2SB1132 T100 R	B	15.3/35.5
Eqv.	1520000910	S.TRA 2SB1132L-R-AB3-R <SLVJ>		
Q64	1590004590	S.TRA DMC506010R	B	19.3/36.0
Q71	1510001090	S.TRA KTA2015Y-RTK/P	B	64.3/15.7
Q72	1510000771	S.TRA 2SA1586-GR(TE85LF)	B	63.5/37.5
Q73	1510001090	S.TRA KTA2015Y-RTK/P	B	64.3/12.8
Q81	1590004100	S.TRA LDTC144TET1G <SLVJ>	B	93.4/20.2
Q82	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	79.1/19.6
Q83	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	78.5/17.5
Q84	1590004070	S.TRA LDTC144EET1G <SLVJ>	B	19.2/43.8
Q85	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	21.5/33.0
Q86	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	68.9/10.7
Q87	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	67.7/39.7
Q88	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	66.9/10.7
Q90	1510000920	S.TRA 2SA1577 T106 Q	T	91.0/12.7
Q91	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	90.0/14.8
Q92	1590003321	S.FET TPC6103(TE85LF)	B	6.9/35.0
Q93	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	4.0/34.6
Q96	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	92.0/14.8
Q97	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	87.8/25.1
Q98	1590004100	S.TRA LDTC144TET1G <SLVJ>	T	64.4/37.1
Q900	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	73.5/48.8
Q901	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	71.5/19.3
Q902	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	89.6/41.2
D1	1750001910	S.DIO HVD144AKRF-E	B	16.2/16.3
D5	1750001890	S.DIO HVD142AKRF-E	B	49.6/15.2
D6	1750001890	S.DIO HVD142AKRF-E	B	49.6/16.6
D7	1750001820	S.DIO LRB706F-40T1G <SLVJ>	T	17.9/10.5
D8	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	14.5/14.2
D10	1750002170	S.DIO DB2S31400L	B	61.5/18.7
D11	1750001880	S.VAR HVL375CKRF-E	T	57.4/29.2
D12	1750001550	S.VAR HVD376BKRF-E	T	54.1/25.6
D13	1750001550	S.VAR HVD376BKRF-E	T	55.1/25.6
D14	1750001880	S.VAR HVL375CKRF-E	T	59.3/27.1
D15	1750001570	S.VAR HVL355CMKRF-E	T	59.3/29.2
D16	1750001550	S.VAR HVD376BKRF-E	T	63.7/25.1
D17	1750001550	S.VAR HVD376BKRF-E	T	62.8/23.2
D21	1750001810	S.DIO L1SS400T1G <SLVJ>	B	30.3/32.4
D22	1750001910	S.DIO HVD144AKRF-E	B	16.2/20.5
D23	1750001910	S.DIO HVD144AKRF-E	B	14.1/23.1
D24	1750001880	S.VAR HVL375CKRF-E	B	17.4/27.8
D26	1750001880	S.VAR HVL375CKRF-E	B	18.6/27.8
D28	1750001780	S.VAR HVB350BYPTL-E	B	31.0/27.8
D31	1750001910	S.DIO HVD144AKRF-E	B	40.3/30.1
D32	1750001910	S.DIO HVD144AKRF-E	T	36.6/28.4
D33	1750001910	S.DIO HVD144AKRF-E	B	36.7/39.8
D34	1750001910	S.DIO HVD144AKRF-E	T	36.5/41.0

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
D36	1750000571	S.DIO 1SS381(TPH3F)	B	54.1/40.0
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D37	1750000571	S.DIO 1SS381 (TPH3F)	B	51.7/36.8
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D38	1750000571	S.DIO 1SS381(TPH3F)	B	56.6/40.0
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D39	1750000571	S.DIO 1SS381(TPH3F)	B	58.1/38.6
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D51	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	91.9/17.8
D52	1750002170	S.DIO DB2S31400L	B	26.2/41.0
D53	1750001810	S.DIO L1SS400T1G <SLVJ>	B	71.5/12.8
D54	1750001810	S.DIO L1SS400T1G <SLVJ>	B	71.5/15.3
D55	1750001810	S.DIO L1SS400T1G <SLVJ>	B	22.8/34.9
D59	1750001850	S.DIO LDAN222T1G <SLVJ>	B	4.2/37.5
D60	1750000571	S.DIO 1SS381(TPH3F)	B	84.8/23.2
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D901	1750002170	S.DIO DB2S31400L	T	87.1/27.9
D902	1750002170	S.DIO DB2S31400L	B	86.2/44.9
D903	1750002170	S.DIO DB2S31400L	B	92.1/30.8
D904	1750002170	S.DIO DB2S31400L	T	88.4/27.9
D905	1750002170	S.DIO DB2S31400L	B	96.3/30.8
FI1	2030000870	S.MON MFT46.3P3 46.350 MHz (FL-442)	B	35.4/34.1
FI2	2010002760	S.XTA MFT46.3J 46.350 MHz (FL-448)	T	36.6/34.5
FI3	2020002410	CER LTM450FW <JJE>		
FI4	2020002570	CER LTM450HW <JJE>		
FI5	2020002610	S.CER LTUCG450G <JJE>	T	64.7/43.6
X2	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz	T	42.2/15.0
X51	6050013160	S.XTA CR-912 TSS3225A 19.6608 MHz	T	81.9/21.2
X900	6050013170	S.XTA CR-914 TTS18VSE-A11 12.288 MHz	B	75.1/46.0
L1	6200012780	S.COI 0.30-1.4-6TL 27.2N <COMO>	B	9.4/7.9
L2	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	9.6/11.7
L3	6200012910	S.COI 0.35-1.6-8TL 45.5N <COMO>	B	11.2/15.6
L4	6200002861	S.COI NLV25T-4RTJ	B	18.4/17.7
L5	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	18.4/14.1
L6	6200012390	S.COI 0.30-0.92-3TR 5.8N <COMO>	B	22.0/14.1
L7	6200013010	S.COI 0.30-0.9-STL 10.3N <COMO>	B	24.3/15.3
L8	6200013100	S.COI 0.45-1.5-STL 18.3N <COMO>	B	25.2/19.0
L9	6200007871	S.COI ELJRF 39NJFB	B	42.2/11.3
L11	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	14.1/19.6
L12	6200011021	S.COI ELJRF 82NJFB	B	12.4/22.8
L13	6200007750	S.COI LQW2BHN56NJ03L	B	14.4/26.8
L14	6200008090	S.COI LQW2BHN68NJ03L	B	21.1/26.8
L15	6200010910	S.COI LQW18AN56NG00D	B	27.1/27.8
L16	6200010910	S.COI LQW18AN56NG00D	B	33.3/27.5
L18	6200007901	S.COI ELJRF 22NJFB	B	32.8/13.4
L19	6200011011	S.COI ELJRF 68NJFB	B	34.4/23.9
L20	6200004770	S.COI ELJNC R56J-F	B	39.1/26.4
L23	6200012170	S.COI MLG1608S R18J-T	T	41.9/35.7
L24	6200012170	S.COI MLG1608S R18J-T	T	45.2/34.2
L31	6200011031	S.COI ELJRF R10JFB	T	56.6/17.7
L32	6200011031	S.COI ELJRF R10JFB	B	53.1/21.7
L33	6200011031	S.COI ELJRF R10JFB	T	62.5/17.7
L34	6190002030	S.COI MLG1608S 1R0J-T	B	57.1/29.6
L35	6200008090	S.COI LQW2BHN68NJ03L	T	55.7/27.7
L36	6190002030	S.COI MLG1608S 1R0J-T	B	50.7/25.7
L37	6200007720	S.COI LQW2BHN33NJ03L	T	53.8/22.6
L38	6200003640	S.COI MLF1608E 100K-T	T	53.0/25.6
L39	6190002030	S.COI MLG1608S 1R0J-T	B	60.6/28.7
L40	6200007760	S.COI LQW2BHN82NJ03L	T	62.9/27.9
L41	6200003640	S.COI MLF1608E 100K-T	T	64.6/27.5
L42	6200008090	S.COI LQW2BHN68NJ03L	T	64.3/20.6
L43	6190002030	S.COI MLG1608S 1R0J-T	B	59.4/22.7
L46	6200007881	S.COI ELJRF 33NJFB	B	48.8/19.5
L51	6200014170	S.COI VLCF4028T-4R7N1R5-2	T	96.5/14.3
L900	6200014160	S.COI VLCF4028T-100M1R0-2	T	77.7/42.9
L901	6200007830	S.COI ELJFC 4R7K-F	B	84.5/48.0
R1	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	9.1/5.7
R2	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/19.2
R3	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/18.3
R7	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	34.0/5.7
R8	7030005220	S.RES ERJ2GEJ 223 X (22K)	T	31.1/5.7
R9	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	31.1/6.6
R10	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	33.0/11.5
R11	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	32.1/11.5
R12	7030005110	S.RES ERJ2GEJ 224 X (220K)	T	32.8/5.7
R13	7030005530	S.RES ERJ2GEJ 100 X (10)	T	34.8/9.9
R14	7030004980	S.RES ERJ2GEJ 101 X (100)	T	35.4/7.5
R15	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	36.3/7.5
R16	7030010040	S.RES ERJ2GEJ-JPW	T	29.4/7.1
R19	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	15.2/11.4
R20	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/12.3
R21	7030007250	S.RES ERJ2GEJ 220 X (22)	B	32.3/10.9
R22	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	31.0/9.2
R23	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	33.7/10.4
R24	7030005590	S.RES ERJ2GEJ 680 X (68)	B	38.4/10.9
R25	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	40.2/10.9

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R26	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	38.4/9.2
R27	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	15.2/12.3
R28	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/13.2
R31	7030005530	S.RES ERJ2GEJ 100 X (10)	T	43.1/15.8
R32	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	43.1/14.9
R33	7030004980	S.RES ERJ2GEJ 101 X (100)	B	44.5/13.1
R34	7030008010	S.RES ERJ2GEJ 123 X (12K)	T	82.0/12.9
R35	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	46.4/14.0
R36	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.6/13.1
R37	7030004980	S.RES ERJ2GEJ 101 X (100)	B	49.6/14.0
R38	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.8/15.7
R39	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	78.6/32.9
R40	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	78.6/34.5
R41	7030005530	S.RES ERJ2GEJ 100 X (10)	T	53.0/17.7
R42	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	56.6/19.4
R43	7030005530	S.RES ERJ2GEJ 100 X (10)	B	55.0/21.7
R44	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	55.0/19.5
R45	7030004980	S.RES ERJ2GEJ 101 X (100)	T	63.4/17.7
R46	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	62.5/19.3
R49	7030006610	S.RES ERJ2GEJ 394 X (390K)	B	80.0/28.4
R50	7030010040	S.RES ERJ2GEJ-JPW	T	33.9/11.5
R51	7030008370	S.RES ERJ2GEJ 561 X (560)	B	56.5/22.9
R52	7030008370	S.RES ERJ2GEJ 561 X (560)	B	60.4/23.4
R53	7030008340	S.RES RR0510P-182-D (1.8K)	T	55.7/27.7
R54	7030011000	S.RES RR0510P-392-D (3.9K)	T	57.9/25.9
R55	7030008340	S.RES RR0510P-182-D (1.8K)	T	61.8/23.7
R56	7030011000	S.RES RR0510P-392-D (3.9K)	T	58.9/25.9
R57	7030009320	S.RES ERJ2GEJ 4R7 X (4.7)	T	60.7/25.9
R58	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.3/30.8
R59	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	62.3/32.5
R61	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	82.7/42.5
R62	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	62.7/34.7
R63	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	65.7/37.6
R65	7030005720	S.RES ERJ2GEJ 563 X (56K)	B	62.7/28.3
R66	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	64.3/27.4
R67	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	62.5/19.3
R68	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	62.7/26.4
R69	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	64.3/25.6
R70	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.7/25.5
R71	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	46.8/29.6
R72	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	50.1/29.6
R73	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	51.9/31.2
R74	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	50.1/31.2
R76	7030004990	S.RES ERJ2GEJ 221 X (220)	T	48.4/25.0
R77	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.9
R78	7030010040	S.RES ERJ2GEJ-JPW	T	46.7/23.8
R79	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.0
R80	7410001130	S.ARR EXB28V102JX	T	41.9/27.8
R81	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	46.4/22.0
R82	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	40.1/18.8
R83	7030004970	S.RES ERJ2GEJ 470 X (47)	T	44.1/19.3
R84	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	40.1/23.7
R87	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	61.1/27.5
R88	7510001730	S.THE ERTJOEP 473J	T	58.8/10.4
R89	7030010080	S.RES ERJ2RHD 1003X (100K)	B	58.2/12.6
R101	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	28.3/32.7
R102	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	29.2/32.7
R103	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	31.0/30.7
R104	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	17.4/26.0
R105	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	18.3/26.0
R106	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	22.9/26.9
R107	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	22.6/30.3
R108	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	22.9/28.7
R109	7030005530	S.RES ERJ2GEJ 100 X (10)	B	23.5/30.0
R110	7030008280	S.RES ERJ2GEJ 271 X (270)	B	23.5/25.6
R111	7030005110	S.RES ERJ2GEJ 224 X (220K)	B	24.4/30.0
R112	7030004970	S.RES ERJ2GEJ 470 X (47)	B	27.1/25.6
R113	7030008370	S.RES ERJ2GEJ 561 X (560)	B	29.2/27.5
	7030008280	S.RES ERJ2GEJ 271 X (270)	[#02]	
	7030008280	S.RES ERJ2GEJ 271 X (270)	[#07]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#08]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#13]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#14]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#18]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#19]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#20]	
	7030008280	S.RES ERJ2GEJ 271 X (270)	[#51]	
	7030008280	S.RES ERJ2GEJ 271 X (270)	[#52]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#53]	
R114	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	30.1/25.6
R115	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	31.0/25.6
R116	7030005080	S.RES ERJ2GEJ 823 X (82K)	B	34.7/28.8
R117	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	33.4/23.9
R118	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	36.4/23.9
R119	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	36.3/27.9
R120	7030005590	S.RES ERJ2GEJ 680 X (68)	B	39.2/23.9
R121	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.0/26.3
R122	7030004970	S.RES ERJ2GEJ 470 X (47)	B	41.9/23.9
R123	7030010040	S.RES ERJ2GEJ-JPW	B	75.1/

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R142	7030005700	S.RES ERJ2GEJ 274 X (270K) [#02]	B	44.9/33.7
	7030005310	S.RES ERJ2GEJ 124 X (120K) [#07]		
	7030005310	S.RES ERJ2GEJ 124 X (120K) [#08]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#13]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#14]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#18]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#19]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#20]		
	7030005310	S.RES ERJ2GEJ 124 X (120K) [#51]		
	7030005310	S.RES ERJ2GEJ 124 X (120K) [#52]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#53]		
R146	7030004970	S.RES ERJ2GEJ 470 X (47)	B	45.6/44.0
R147	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	47.1/42.2
R148	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.9/33.7
R149	7030007060	S.RES ERJ2GEJ 684X (680K)	T	41.5/32.3
R151	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	51.7/39.0
R152	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	53.0/35.2
R153	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	55.5/38.7
R154	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	57.8/36.9
R155	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	58.8/39.8
R156	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	21.4/25.5
R157	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	31.0/23.9
R158	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	59.7/35.7
R159	7030008370	S.RES ERJ2GEJ 561 X (560)	B	54.6/35.7
R161	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	62.4/42.8
R162	7030004980	S.RES ERJ2GEJ 101 X (100)	B	64.0/42.8
R163	7030004980	S.RES ERJ2GEJ 101 X (100)	B	69.5/46.4
R164	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	67.4/41.1
R165	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	65.7/44.8
R166	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	65.7/43.9
R167	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	65.7/43.0
R169	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	65.7/42.1
R171	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	36.6/27.4
R172	7030005530	S.RES ERJ2GEJ 100 X (10)	B	39.2/31.1
R173	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.5/32.3
R174	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	38.7/39.9
R175	7030008370	S.RES ERJ2GEJ 561 X (560)	B	35.1/38.8
R176	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	35.5/40.6
R177	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.1/40.7
R178	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	39.2/40.7
R181	7030010040	S.RES ERJ2GEJ-JPW	T	35.5/29.6
R182	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	T	34.0/28.4
R183	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	T	37.8/41.1
R184	7030005010	S.RES ERJ2GEJ 681 X (680)	T	37.8/39.3
R185	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	73.0/21.7
R186	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	73.0/22.6
R190	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	65.7/46.6
R243	7030005530	S.RES ERJ2GEJ 100 X (10)	B	82.1/21.8
R244	7030005160	S.RES ERJ2GEJ 105 X (1M)	B	83.0/21.8
R357	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	58.2/10.2
R358	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/8.7
R359	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/10.5
R360	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	56.0/9.6
R361	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	24.8/41.7
R362	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	51.6/7.5
R363	7030005000	S.RES ERJ2GEJ 471 X (470)	B	58.2/8.6
R364	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	55.4/2.1
R365	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	26.2/38.9
R367	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	53.5/2.2
R398	7030008310	S.RES ERJ2GEJ 564 X (560K)	T	43.7/11.0
R405	7030011290	S.RES ERJ2Y1R8U (1.8)	T	31.5/35.6
R406	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	12.6/45.7
R408	7030004980	S.RES ERJ2GEJ 101 X (100)	B	35.6/46.3
R412	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	15.9/39.5
R413	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	19.1/34.7
R414	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	20.7/34.1
R416	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	21.5/36.0
R417	7030007570	S.RES ERJ2GEJ 122 X (1.2K)	B	21.3/37.2
R418	7030009280	S.RES ERJ2GEJ 391 X	B	19.8/37.9
R420	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	89.9/25.5
R421	7210003610	VAR F081-0025A <SLVJ>		
R423	7030012530	S.RES ERJ2RHD 3302X (33.0K)	T	6.2/36.5
R424	7030012540	S.RES ERJ2RHD 1502X (15.0K)	T	4.8/38.4
R426	7030009140	S.RES ERJ2GEJ 272 X (2.7K)	B	80.4/26.3
R427	7030007340	S.RES ERJ2GEJ 153 X (15K)	B	79.5/26.3
R430	7030005160	S.RES ERJ2GEJ 105 X (1M)	B	74.4/13.4
R431	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	66.0/14.3
R432	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	67.8/12.7
R433	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	65.7/38.5
R434	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	65.7/39.4
R435	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	66.0/12.7
R436	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	66.9/12.7
R437	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	15.0/37.1
R439	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	72.8/13.4
R440	7030009280	S.RES ERJ2GEJ 391 X	B	17.4/43.3
R441	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	19.1/33.5
R442	7030007280	S.RES ERJ2GEJ 331 X (330)	B	21.5/35.1
R444	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	89.3/12.8
R451	7030005060	S.RES ERJ2GEJ 333 X (33K)	T	24.6/30.5
R452	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/30.5
R453	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/29.6
R454	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	23.0/30.5
R468	7030005010	S.RES ERJ2GEJ 681 X (680)	T	76.6/17.6
R469	7030008280	S.RES ERJ2GEJ 271 X (270)	T	77.5/20.4
R491	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	80.8/31.3
R492	7030009140	S.RES ERJ2GEJ 272 X (2.7K)	B	77.7/34.5
R495	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	82.1/30.0
R496	7030008010	S.RES ERJ2GEJ 123 X (12K)	B	79.5/32.9
R499	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	82.1/28.4
R502	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	78.1/31.3
R517	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	B	65.9/26.4
R518	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	65.9/25.5
R614	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	65.9/27.4
R619	7030005530	S.RES ERJ2GEJ 100 X (10)	B	96.5/15.6
R620	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	92.7/10.0

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R621	7030007340	S.RES ERJ2GEJ 153 X (15K)	T	93.6/10.0
R622	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	92.7/8.0
R623	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	T	6.4/46.2
R624	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	89.3/11.2
R625	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	7.8/37.2
R626	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	6.2/37.2
R627	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/21.3
R628	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	88.2/17.0
R629	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	84.8/21.8
R630	7030010040	S.RES ERJ2GEJ-JPW	B	67.1/25.8
R631	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	82.5/25.5
R632	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	82.6/23.0
R633	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	85.6/24.3
R634	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	83.2/11.3
R635	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.2/15.5
R636	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.2/14.6
R637	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	87.4/19.9
R638	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.4/16.1
R639	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.6/15.7
R640	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	74.4/11.6
R641	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/22.2
R646	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	93.7/22.8
R647	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.3/21.0
R651	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	86.7/13.5
R652	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.4/22.2
R653	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	85.7/21.8
R657	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	84.9/13.1
R661	7410001130	S.ARR EXB28V102JX	B	90.9/12.3
R662	7410001130	S.ARR EXB28V102JX	B	90.9/14.8
R663	7410001130	S.ARR EXB28V102JX	B	88.4/22.3
R664	7410001150	S.ARR EXB28V471JX	B	80.3/22.3
R665	7410001130	S.ARR EXB28V102JX	B	77.8/22.3
R666	7410001130	S.ARR EXB28V102JX	B	75.4/9.9
R667	7410001130	S.ARR EXB28V102JX	B	79.4/6.4
R668	7410001130	S.ARR EXB28V102JX	B	82.4/6.4
R669	7410001130	S.ARR EXB28V102JX	B	85.2/6.4
R683	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.7/19.7
R688	7030005110	S.RES ERJ2GEJ 224 X (220K)	T	81.1/21.2
R691	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	82.9/12.9
R692	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	92.3/20.4
R693	7030007340	S.RES ERJ2GEJ 153 X (15K)	B	93.7/12.9
R694	7030012540	S.RES ERJ2RHD 1502X (15.0K)	B	91.9/20.6
R704	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	95.3/22.4
R705	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	95.2/20.7
R901	7410001170	S.ARR EXB28V470JX	B	79.5/36.7
R904	7030008010	S.RES ERJ2GEJ 123 X (12K)	B	74.2/21.1
R905	7030007250	S.RES ERJ2GEJ 220 X (22)	T	75.2/34.3
R906	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	T	75.2/31.6
R907	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	T	75.2/32.5
R908	7030008010	S.RES ERJ2GEJ 123 X (12K)	B	75.1/21.1
R910	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	79.8/33.6
R913	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	71.4/21.7
R915	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	84.8/32.4
R917	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	85.6/32.1
R920	7030007270	S.RES ERJ2GEJ 151 X (150)	B	83.0/30.0
R921	7030007270	S.RES ERJ2GEJ 151 X (150)	T	79.8/34.5
R922	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.5/35.2
R923	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	72.3/47.0
R925	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	75.5/49.3
R930	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	83.1/28.2
R931	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	82.2/28.2
R932	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	82.2/29.8
R933	7030004970	S.RES ERJ2GEJ 470 X (47)	B	72.3/46.1
R934	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	76.9/48.6
R935	7030004970	S.RES ERJ2GEJ 470 X (47)	B	81.4/48.6
R936	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	79.6/48.6
R937	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	78.7/48.6
R938	7030004980	S.RES ERJ2GEJ 101 X (100)	B	80.3/43.8
R939	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	79.9/42.0
R940	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	78.2/41.2
R941	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	77.5/43.1
R942	7030007270	S.RES ERJ2GEJ 151 X (150)	B	71.8/35.3
R943	7030004990	S.RES ERJ2GEJ 221 X (220)	B	77.8/38.0
R944	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	83.3/40.7
R945	7410001140	S.ARR EXB28V104JX	T	86.

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C3	4030017410	S.CER C1005 CH 1H 240J-T	B	7.4/12.0
C4	4030017570	S.CER C1005 CH 1H 040B-T	B	11.5/11.4
C5	4030017650	S.CER C1005 CH 1H 270J-T	B	12.4/11.4
C6	4030017550	S.CER C1005 CH 1H 1R5B-T	B	11.5/13.0
C7	4030017640	S.CER C1005 CH 1H 150J-T	B	12.4/13.0
C8	4030017460	S.CER C1005 JB 1H 102K-T	B	14.5/17.2
C11	4030017460	S.CER C1005 JB 1H 102K-T	B	20.6/20.1
C15	4030017400	S.CER C1005 CH 1H 220J-T	B	16.3/14.3
C16	4030017390	S.CER C1005 CH 1H 180J-T	B	17.9/11.3
C20	4030017460	S.CER C1005 JB 1H 102K-T	B	20.4/14.1
C21	4030008560	S.CER C1608 CH 1H 300J-T	B	21.3/10.4
C22	4030007040	S.CER C1608 CH 1H 180J-T	B	22.0/12.4
C23	4030008560	S.CER C1608 CH 1H 300J-T	B	22.7/10.4
C24	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/11.4
C25	4030017460	S.CER C1005 JB 1H 102K-T	T	19.8/10.5
C26	4030017460	S.CER C1005 JB 1H 102K-T	T	29.4/5.7
C27	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/5.8
C28	4030017460	S.CER C1005 JB 1H 102K-T	T	33.0/13.1
C29	4030016930	S.CER C1005 JB 1A 104K-T	T	31.2/11.5
C30	4030018890	S.CER C1005 JB 0J 224K-T	T	32.8/6.6
C31	4030016930	S.CER C1005 JB 1A 104K-T	T	34.8/11.5
C32	4030017460	S.CER C1005 JB 1H 102K-T	T	35.7/9.9
C33	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/7.5
C34	4030018860	S.CER C1005 JB 0J 105K-T	T	38.1/7.5
C35	4030017420	S.CER C1005 CH 1H 470J-T	B	37.5/9.2
C36	4030017460	S.CER C1005 JB 1H 102K-T	B	39.3/9.2
C37	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/12.3
C38	4030017460	S.CER C1005 JB 1H 102K-T	T	17.9/12.7
C40	4030017420	S.CER C1005 CH 1H 470J-T	T	21.4/13.2
C41	4030017460	S.CER C1005 JB 1H 102K-T	B	28.0/17.6
C43	4030017490	S.CER C1608 JB 1A 105K-T	B	27.8/20.3
C44	4030017460	S.CER C1005 JB 1H 102K-T	T	32.7/16.6
C45	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/12.3
C46	4030017510	S.CER C1005 CH 1H 680J-T	B	32.8/12.4
C48	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/9.2
C49	4030017420	S.CER C1005 CH 1H 470J-T	B	31.9/9.2
C51	4030017460	S.CER C1005 JB 1H 102K-T	B	23.5/22.8
C52	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/14.4
C53	4030017460	S.CER C1005 JB 1H 102K-T	B	37.5/10.9
C54	4030016790	S.CER C1005 JB 1E 103K-T	B	39.3/10.9
C55	4030017490	S.CER C1608 JB 1A 105K-T	B	33.5/16.6
C56	4030017430	S.CER C1005 CH 1H 101J-T	B	39.9/13.1
C57	4030017460	S.CER C1005 JB 1H 102K-T	B	43.1/16.7
C58	4030017420	S.CER C1005 CH 1H 470J-T	B	43.9/11.3
C59	4030017460	S.CER C1005 JB 1H 102K-T	B	42.2/10.4
C60	4030017460	S.CER C1005 JB 1H 102K-T	B	44.5/12.2
C63	4030017650	S.CER C1005 CH 1H 270J-T	B	46.4/14.9
C64	4030016790	S.CER C1005 JB 1E 103K-T	B	49.6/12.1
C65	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/14.0
C71	4030017620	S.CER C1005 CH 1H 100C-T	B	51.8/16.6
C72	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/17.8
C73	4030017460	S.CER C1005 JB 1H 102K-T	T	53.0/19.4
C74	4030017590	S.CER C1005 CH 1H 070C-T	T	58.0/18.9
C75	4030017460	S.CER C1005 JB 1H 102K-T	T	54.1/20.4
C76	4030017460	S.CER C1005 JB 1H 102K-T	B	55.0/18.6
C77	4030017460	S.CER C1005 JB 1H 102K-T	T	64.3/17.7
C78	4030017460	S.CER C1005 JB 1H 102K-T	T	58.9/18.9
C79	4030016930	S.CER C1005 JB 1A 104K-T	B	64.4/21.3
C80	4030017460	S.CER C1005 JB 1H 102K-T	B	63.0/35.6
C81	4030017360	S.CER C1005 CH 1H 030B-T	T	58.5/17.3
C83	4030017540	S.CER C1005 CH 1H R75B-T	T	58.9/21.2
C85	4030017460	S.CER C1005 JB 1H 102K-T	T	57.1/21.2
C86	4030017660	S.CER C1005 CH 1H 330J-T	T	57.0/25.9
C87	4030017660	S.CER C1005 CH 1H 330J-T	T	58.0/21.2
C88	4030017660	S.CER C1005 CH 1H 330J-T	T	56.1/25.9
C89	4030017660	S.CER C1005 CH 1H 330J-T	T	57.9/27.5
C90	4030017460	S.CER C1005 JB 1H 102K-T	B	60.6/34.5
C92	4030017420	S.CER C1005 CH 1H 470J-T	T	53.2/28.5
C94	4030017420	S.CER C1005 CH 1H 470J-T	B	59.9/21.7
C95	4030017610	S.CER C1005 CH 1H 090C-T	T	53.2/27.5
C97	4030020000	S.CER C1005 JB 1A 105K-T	B	68.9/23.1
C99	4030020000	S.CER C1005 JB 1A 105K-T	B	69.1/24.3
C100	4030016930	S.CER C1005 JB 1A 104K-T	B	70.6/35.9
C101	4030017530	S.CER C1005 CH 1H 0R5B-T	T	59.8/21.2
C102	4030016930	S.CER C1005 JB 1A 104K-T	T	56.2/21.8
C103	4030017460	S.CER C1005 JB 1H 102K-T	T	61.8/21.8
C104	4030017390	S.CER C1005 CH 1H 180J-T	T	59.8/25.9
C105	4030017660	S.CER C1005 CH 1H 330J-T	T	60.7/21.2
C106	4030017510	S.CER C1005 CH 1H 680J-T	T	61.6/26.0
C107	4030017660	S.CER C1005 CH 1H 330J-T	T	61.1/27.2
C109	4550008090	S.TAN TCTU0J105K8R	B	61.5/34.8
C110	4030017340	S.CER C1005 CH 1H 010B-T	T	61.1/29.2
C111	4030017440	S.CER C1005 CH 1H 221J-T	T	62.7/25.3
C112	4030017460	S.CER C1005 JB 1H 102K-T	B	61.1/32.2
C113	4030017360	S.CER C1005 CH 1H 030B-T	T	64.7/23.5
C114	4030017360	S.CER C1005 CH 1H 030B-T	T	63.8/23.1
C115	4030017610	S.CER C1005 CH 1H 090C-T	T	64.7/25.3
C116	4030018860	S.CER C1005 JB 0J 105K-T	B	62.7/27.4
C117	4030018820	S.CER C1005 JB 1H 561K-T	B	61.1/26.5
C118	4030017420	S.CER C1005 CH 1H 470J-T	B	64.3/28.3
C119	4030016930	S.CER C1005 JB 1A 104K-T	B	61.1/31.3
C120	4030017460	S.CER C1005 JB 1H 102K-T	B	64.3/26.4
C121	4030019560	S.CER GRM21BB31C106KE15L	B	59.4/19.6
C122	4030016790	S.CER C1005 JB 1E 103K-T	B	66.0/15.9
C123	4030017460	S.CER C1005 JB 1H 102K-T	B	51.9/29.6
C124	4030017460	S.CER C1005 JB 1H 102K-T	B	51.0/31.2
C127	4030017460	S.CER C1005 JB 1H 102K-T	B	61.1/25.6
C128	4030017460	S.CER C1005 JB 1H 102K-T	B	70.6/35.0
C129	4030016930	S.CER C1005 JB 1A 104K-T	T	67.6/33.3
C132	4550000560	S.TAN TEESVA 1V 334M8R	T	48.3/21.4
Eqv.	4550007550	S.TAN F931V334MAABMA		
C134	4550003250	S.TAN TEESVA 1V 474M8R	T	46.7/29.8
Eqv.	4550007590	S.TAN F931V474MAABMA		
C136	4030017460	S.CER C1005 JB 1H 102K-T	T	66.7/33.3
C137	4030016930	S.CER C1005 JB 1A 104K-T	T	69.0/27.6

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C138	4030017460	S.CER C1005 JB 1H 102K-T	T	69.0/26.7
C139	4030020000	S.CER C1005 JB 1A 105K-T	B	68.2/24.3
C140	4030020000	S.CER C1005 JB 1A 105K-T	B	70.0/24.3
C141	4030017620	S.CER C1005 CH 1H 100C-T	B	50.4/19.5
C144	4030017430	S.CER C1005 CH 1H 101J-T	T	43.7/20.5
C145	4030018890	S.CER C1005 JB 0J 224K-T	T	42.8/20.5
C146	4030018890	S.CER C1005 JB 0J 224K-T	T	41.5/20.5
C147	4030017460	S.CER C1005 JB 1H 102K-T	T	46.4/21.1
C148	4030019560	S.CER GRM21BB31C106KE15L	B	44.0/26.2
C149	4030017430	S.CER C1005 CH 1H 101J-T	T	44.6/20.5
C150	4030016790	S.CER C1005 JB 1E 103K-T	T	43.9/28.1
C151	4030017430	S.CER C1005 CH 1H 101J-T	T	43.9/27.2
C152	4030017460	S.CER C1005 JB 1H 102K-T	T	44.0/29.0
C153	4030017420	S.CER C1005 CH 1H 470J-T	T	43.2/30.4
C154	4030017420	S.CER C1005 CH 1H 470J-T	T	42.3/30.4
C155	4030017420	S.CER C1005 CH 1H 470J-T	T	41.4/30.4
C156	4030016930	S.CER C1005 JB 1A 104K-T	T	40.5/30.4
C157	4030017460	S.CER C1005 JB 1H 102K-T	T	41.0/18.8
C158	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/18.8
C159	4030016930	S.CER C1005 JB 1A 104K-T	T	40.1/11.0
C160	4030017460	S.CER C1005 JB 1H 102K-T	T	41.9/11.0
C167	4030017630	S.CER C1005 CH 1H 120J-T	B	50.4/20.4
C168	4030017630	S.CER C1005 CH 1H 120J-T	B	48.9/21.6
C169	4030017620	S.CER C1005 CH 1H 100C-T	B	48.8/20.4
C171	4030018120	S.CER C1005 CH 1H 110J-T	B	16.2/18.5
C172	4030017640	S.CER C1005 CH 1H 150J-T	B	13.9/22.1
C173	4030017460	S.CER C1005 JB 1H 102K-T	B	13.4/24.4
C174	4030017580	S.CER C1005 CH 1H 060C-T	B	12.4/24.4
C175	4030017620	S.CER C1005 CH 1H 100C-T	B	12.9/26.5
C176	4030017430	S.CER C1005 CH 1H 101J-T	B	16.2/26.6
C177	4030017340	S.CER C1005 CH 1H 010B-T	B	16.4/27.8
C178	4030017550	S.CER C1005 CH 1H 1R5B-T	B	18.0/29.2
C179	4030017370	S.CER C1005 CH 1H 3R5B-T	B	19.6/27.8
C180	4030017430	S.CER C1005 CH 1H 101J-T	B	19.2/26.0
C181	4030017370	S.CER C1005 CH 1H 3R5B-T	B	22.9/27.8
C182	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/24.6
C183	4030017460	S.CER C1005 JB 1H 102K-T	B	16.2/25.7
C184	4030016930	S.CER C1005 JB 1A 104K-T	T	20.9/26.7
C186	4030016930	S.CER C1005 JB 1A 104K-T	B	21.7/30.0
C188	4030016930	S.CER C1005 JB 1A 104K-T	B	25.3/30.0
C189	4030017460	S.CER C1005 JB 1H 102K-T	B	27.1/23.9
C191	4030016790	S.CER C1005 JB 1E 103K-T	B	28.7/28.7
C192	4030017460	S.CER C1005 JB 1H 102K-T	B	26.2/25.6
C193	4030017460	S.CER C1005 JB 1H 102K-T	B	25.3/25.6
C195	4030017570	S.CER C1005 CH 1H 040B-T	B	28.2/27.5
C196	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/25.6
C197	4030017350	S.CER C1005 CH 1H 020B-T	B	31.0/29.8
C198	4030017460	S.CER C1005 JB 1H 102K-T	B	32.3/25.8
C199	4030017380	S.CER C1005 CH 1H 050B-T	B	34.4/26.6
C200	4030017580	S.CER C1005 CH 1H 060C-T	B	34.7/27.9
C201	4030017460	S.CER C1005 JB 1H 102K-T	T	31.8/23.6
C202	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/23.9
C203	4030016930	S.CER C1005 JB 1A 104K-T	B	30.1/23.9
C206	4030017620	S.CER C1005 CH 1H 100C-T	B	47.4/16.8
C210	4030017630	S.CER C1005 CH 1H 120J-T	B	35.4/23.9
C211	4030017460	S.CER C1005 JB 1H 102K-T	B	34.4/22.3
C214	4030017460	S.CER C1005 JB 1H 102K-T	B	37.4/23.9
C215	4030017390	S.CER C1005 CH 1H 180J-T	B	41.9/26.3
C216	4030017460	S.CER C1005 JB 1H 102K-T	B	41.0/23.9
C217	4030016790	S.CER C1005 JB 1E 103K-T	B	40.1/23.9
C218	4030016790	S.CER C1005 JB 1E 103K-T	B	37.5/28.5
C223	4030017460	S.CER C1005 JB 1H 102K-T	B	41.9/22.3
C224	4030017460	S.CER C1005 JB 1H 102K-T	B	47.4/18.6
C225	4030017460	S.CER C1005 JB 1H 102K-T	T	39.5/38.8
C226	4030016790	S.CER C1005 JB 1E 103K-T	B	37.3/44.4
C227	4030016790	S.CER C1005 JB 1E 103K-T	B	36.3/40.8
C231	4030017430	S.CER C1005 CH 1H 101J-T	B	60.6/42.6
C232	4030017660	S.CER C1005 CH 1H 330J-T	T	42.0/38.9
C233	4030017460	S.CER C1005 JB 1H 102K-T	B	41.2/38.9
C235	4030019560	S.CER GRM21BB31C106KE15L	B	44.5/42.6
C236	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/43.1
C238	4030017460	S.CER C1005 JB 1H 102K-T	B	41.2

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C272	4030016930	S.CER C1005 JB 1A 104K-T	B	62.4/41.9
C273	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/45.7
C274	4030016930	S.CER C1005 JB 1A 104K-T	B	68.9/42.0
C275	4030017040	S.CER C1005 JB 1A 333K-T	B	67.9/46.4
C276	4030017650	S.CER C1005 CH 1H 270J-T	B	67.3/42.0
C277	4030016930	S.CER C1005 JB 1A 104K-T	B	65.8/41.2
C282	4030016790	S.CER C1005 JB 1E 103K-T	B	40.8/31.1
C283	4030017590	S.CER C1005 CH 1H 070C-T	B	39.0/35.3
C284	4030016790	S.CER C1005 JB 1E 103K-T	B	36.7/38.8
C286	4030016790	S.CER C1005 JB 1E 103K-T	T	34.9/28.4
C288	4030017600	S.CER C1005 CH 1H 080C-T	T	39.9/32.6
C290	4030016790	S.CER C1005 JB 1E 103K-T	T	37.8/40.2
C291	4030016930	S.CER C1005 JB 1A 104K-T	B	42.4/32.3
C292	4030016930	S.CER C1005 JB 1A 104K-T	T	38.3/44.1
C293	4030017460	S.CER C1005 JB 1H 102K-T	T	40.1/42.4
C311	4030018860	S.CER C1005 JB 0J 105K-T	T	26.3/31.4
C312	4030017710	S.CER C1005 CH 1H 181J-T	T	23.0/31.4
C313	4030016930	S.CER C1005 JB 1A 104K-T	T	21.2/28.0
C318	4030016790	S.CER C1005 JB 1E 103K-T	B	75.1/24.4
C323	4030016930	S.CER C1005 JB 1A 104K-T	T	81.4/11.3
C327	4030017900	S.CER C1005 JB 1E 123K-T	B	65.0/24.6
C328	4030020010	S.CER C1005 CH 1H 271J-T	B	65.9/28.3
C334	4030017460	S.CER C1005 JB 1H 102K-T	B	15.0/46.6
C335	4030017460	S.CER C1005 JB 1H 102K-T	B	24.6/38.2
C336	4030018860	S.CER C1005 JB 0J 105K-T	B	57.3/8.6
C337	4030017460	S.CER C1005 JB 1H 102K-T	B	52.5/7.5
C338	4030017460	S.CER C1005 JB 1H 102K-T	B	50.7/7.5
C339	4030017460	S.CER C1005 JB 1H 102K-T	B	53.4/7.5
C340	4030016930	S.CER C1005 JB 1A 104K-T	B	57.3/10.2
C341	4030018860	S.CER C1005 JB 0J 105K-T	B	59.1/10.2
C342	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/6.6
C343	4030019560	S.CER GRM21BB31C106KE15L	B	57.6/6.9
C344	4030016930	S.CER C1005 JB 1A 104K-T	B	55.1/2.0
C364	4030017630	S.CER C1005 CH 1H 120J-T	T	42.8/11.0
C381	4030016930	S.CER C1005 JB 1A 104K-T	B	81.1/25.1
C382	4030016930	S.CER C1005 JB 1A 104K-T	B	79.4/25.1
C383	4030018860	S.CER C1005 JB 0J 105K-T	B	77.6/25.1
C384	4030018860	S.CER C1005 JB 0J 105K-T	B	72.8/14.3
C385	4030016930	S.CER C1005 JB 1A 104K-T	B	72.8/12.5
C388	4030017460	S.CER C1005 JB 1H 102K-T	B	20.9/3.5
C389	4030017460	S.CER C1005 JB 1H 102K-T	B	43.9/2.5
C390	4030017460	S.CER C1005 JB 1H 102K-T	B	53.3/2.6
C391	4030017420	S.CER C1005 CH 1H 470J-T	B	37.3/46.3
C392	4030017420	S.CER C1005 CH 1H 470J-T	B	29.1/43.9
C393	4520000020	S.NIO NOJC227M006RWJV	B	19.8/40.5
C394	4030017460	S.CER C1005 JB 1H 102K-T	B	28.2/43.9
C395	4520000020	S.NIO NOJC227M006RWJV	T	21.2/37.1
C396	4030017460	S.CER C1005 JB 1H 102K-T	T	27.1/47.4
C397	4030017460	S.CER C1005 JB 1H 102K-T	T	25.2/37.4
C398	4030017460	S.CER C1005 JB 1H 102K-T	B	12.2/32.0
C399	4030016930	S.CER C1005 JB 1A 104K-T	B	22.2/37.2
C400	4550006250	S.TAN TEESVA 1A 106M8R	T	12.9/40.8
Eqv.	4550007520	S.TAN F931A106MAABMA		
C401	4030016930	S.CER C1005 JB 1A 104K-T	B	12.2/37.6
C403	4030018890	S.CER C1005 JB 0J 224K-T	B	15.0/39.5
C404	4030016930	S.CER C1005 JB 1A 104K-T	B	12.2/38.5
C405	4030018860	S.CER C1005 JB 0J 105K-T	B	19.3/33.7
C406	4030017460	S.CER C1005 JB 1H 102K-T	T	20.7/34.7
C408	4030016930	S.CER C1005 JB 1A 104K-T	T	4.8/37.5
C412	4030017460	S.CER C1005 JB 1H 102K-T	T	6.5/42.8
C413	4030017460	S.CER C1005 JB 1H 102K-T	B	7.7/31.9
C423	4030016790	S.CER C1005 JB 1E 103K-T	B	67.8/14.3
C426	4030016790	S.CER C1005 JB 1E 103K-T	B	65.7/40.3
C428	4030017460	S.CER C1005 JB 1H 102K-T	T	16.4/32.2
C429	4030016790	S.CER C1005 JB 1E 103K-T	B	66.9/14.3
C431	4510009870	S.ELE 10 CE 100 LD	T	14.7/27.2
C432	4030017430	S.CER C1005 CH 1H 101J-T	T	92.7/6.4
C433	4030017460	S.CER C1005 JB 1H 102K-T	T	17.3/32.2
C434	4030016790	S.CER C1005 JB 1E 103K-T	T	14.3/32.7
C435	4550007320	S.TAN F930J226MAABMA	T	19.4/30.8
C437	4030017460	S.CER C1005 JB 1H 102K-T	T	14.3/31.8
C448	4030019490	S.CER C2012 JB 1A 106K-T	B	28.3/46.0
C451	4030016930	S.CER C1005 JB 1A 104K-T	B	85.3/25.5
C452	4030016930	S.CER C1005 JB 1A 104K-T	B	86.2/25.5
C453	4030017640	S.CER C1005 CH 1H 150J-T	T	83.9/22.5
C454	4030017580	S.CER C1005 CH 1H 060C-T	T	85.2/21.3
C455	4030017640	S.CER C1005 CH 1H 150J-T	B	83.9/21.8
C456	4030016930	S.CER C1005 JB 1A 104K-T	T	82.3/11.3
C457	4030017030	S.CER C1005 JB 1A 273K-T	T	86.0/9.3
C458	4030018900	S.CER C1005 JB 0J 474K-T	T	84.2/19.8
C461	4030019990	S.CER C1005 JB 1C 104K-T	B	97.4/12.4
C462	4030020190	S.CER GRM32EB31C476KE15L	B	96.4/9.1
C463	4030019990	S.CER C1005 JB 1C 104K-T	T	93.6/8.0
C464	4030020190	S.CER GRM32EB31C476KE15L	T	90.7/7.0
C465	4050000240	S.FEE NFM18PC104R1C3D	T	88.5/9.1
C466	4030018860	S.CER C1005 JB 0J 105K-T	T	88.4/11.2
C467	4030016790	S.CER C1005 JB 1E 103K-T	T	88.4/12.8
C468	4030020190	S.CER GRM32EB31C476KE15L	B	92.4/8.0
C482	4030016930	S.CER C1005 JB 1A 104K-T	B	80.4/34.5
C483	4030018860	S.CER C1005 JB 0J 105K-T	B	78.6/26.8
C484	4030020120	S.CER C1005 JB 0J 225M-T	B	80.0/27.5
C485	4030018860	S.CER C1005 JB 0J 105K-T	B	80.4/32.9
C490	4030016930	S.CER C1005 JB 1A 104K-T	B	79.5/34.5
C492	4030017710	S.CER C1005 CH 1H 181J-T	B	79.0/31.3
C494	4030016780	S.CER C1005 JB 1E 153K-T	B	79.9/31.3
C501	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/16.1
C502	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/17.9
C503	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/15.2
C504	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/17.0
C505	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/14.3
C506	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/19.3
C507	4030018860	S.CER C1005 JB 0J 105K-T	T	83.3/8.9
C508	4030017460	S.CER C1005 JB 1H 102K-T	T	84.2/8.9
C509	4030018860	S.CER C1005 JB 0J 105K-T	T	86.5/20.0
C510	4030017460	S.CER C1005 JB 1H 102K-T	B	91.4/10.5

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-A UNIT]

REF NO.	PARTS NO.	DESCRIPTION		M.	H/V LOCATION
C511	4030018860	S.CER	C1005 JB 0J 105K-T	T	90.5/21.3
C512	4030018860	S.CER	C1005 JB 0J 105K-T	B	74.4/12.5
C513	4030016930	S.CER	C1005 JB 1A 104K-T	T	85.6/20.0
C514	4030018860	S.CER	C1005 JB 0J 105K-T	T	76.6/18.5
C515	4030017460	S.CER	C1005 JB 1H 102K-T	T	90.5/22.2
C900	4030016930	S.CER	C1005 JB 1A 104K-T	T	75.4/35.7
C901	4030018910	S.CER	C1608 JB 0J 475K-T	T	76.4/36.0
C902	4050000240	S.FEE	NFM18PC104R1C3D	B	71.6/41.8
C903	4050000240	S.FEE	NFM18PC104R1C3D	B	72.3/40.3
C904	4050000240	S.FEE	NFM18PC104R1C3D	B	74.1/41.3
C907	4030017460	S.CER	C1005 JB 1H 102K-T	T	75.2/33.4
C908	4030018910	S.CER	C1608 JB 0J 475K-T	T	79.3/35.7
C909	4030016930	S.CER	C1005 JB 1A 104K-T	T	77.9/34.5
C910	4030016930	S.CER	C1005 JB 1A 104K-T	B	73.5/43.3
C911	4550007730	S.TAN	TEESVJ 0J 106M8R	B	75.4/42.3
Eqv.	4550008380	S.TAN	TMCJ0J106MTRF		
C912	4030018910	S.CER	C1608 JB 0J 475K-T	T	78.8/39.5
C913	4030016930	S.CER	C1005 JB 1A 104K-T	T	80.1/40.2
C915	4030016930	S.CER	C1005 JB 1A 104K-T	B	71.5/37.8
C916	4550007730	S.TAN	TEESVJ 0J 106M8R	B	73.5/38.4
Eqv.	4550008380	S.TAN	TMCJ0J106MTRF		
C917	4030016930	S.CER	C1005 JB 1A 104K-T	B	72.4/37.8
C918	4030016790	S.CER	C1005 JB 1E 103K-T	B	70.4/45.3
C919	4030018860	S.CER	C1005 JB 0J 105K-T	T	81.2/44.5
C920	4030016790	S.CER	C1005 JB 1E 103K-T	T	81.2/43.6
C921	4030018910	S.CER	C1608 JB 0J 475K-T	B	79.7/38.9
C922	4030018910	S.CER	C1608 JB 0J 475K-T	B	79.7/40.1
C923	4030016790	S.CER	C1005 JB 1E 103K-T	B	90.0/30.9
C927	4030018860	S.CER	C1005 JB 0J 105K-T	B	74.2/22.8
C928	4030018860	S.CER	C1005 JB 0J 105K-T	B	79.0/29.7
C930	4030018860	S.CER	C1005 JB 0J 105K-T	B	71.8/22.9
C931	4030018860	S.CER	C1005 JB 0J 105K-T	B	86.7/41.3
C935	4030016790	S.CER	C1005 JB 1E 103K-T	B	90.2/38.4
C936	4030018860	S.CER	C1005 JB 0J 105K-T	B	90.3/39.3
C937	4030016790	S.CER	C1005 JB 1E 103K-T	B	88.0/30.4
C940	4030018910	S.CER	C1608 JB 0J 475K-T	B	83.2/43.6
C941	4030016930	S.CER	C1005 JB 1A 104K-T	T	83.3/43.6
C942	4030016930	S.CER	C1005 JB 1A 104K-T	B	92.3/41.2
C943	4030016790	S.CER	C1005 JB 1E 103K-T	B	87.7/41.3
C944	4030016930	S.CER	C1005 JB 1A 104K-T	B	76.6/43.1
C945	4030016930	S.CER	C1005 JB 1A 104K-T	B	72.3/45.2
C946	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.5/48.4
C947	4030016930	S.CER	C1005 JB 1A 104K-T	T	83.1/29.8
C948	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.1/44.0
C949	4030017420	S.CER	C1005 CH 1H 470J-T	B	72.3/44.3
C950	4030017620	S.CER	C1005 CH 1H 100C-T	B	77.8/48.6
C951	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.0/46.9
C953	4030017460	S.CER	C1005 JB 1H 102K-T	B	80.5/48.6
C954	4030016790	S.CER	C1005 JB 1E 103K-T	B	82.3/48.6
C955	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.7/43.8
C956	4030017380	S.CER	C1005 CH 1H 050B-T	B	79.9/42.9
C957	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.7/42.6
C958	4030016930	S.CER	C1005 JB 1A 104K-T	T	68.5/38.2
C960	4030017920	S.CER	C1005 JB 1A 683K-T	B	68.3/35.9
J51	6450000131	CON	HSJ1102-018540		
J52	6450002250	CON	HSJ1456-010320		
J53	6510021901	S.CON	BM02B-ASRS-TF(LF)(SN)	T	27.2/34.5
F51	5210001160	S.FUS	ERBRE3R00V	T	10.7/37.6
DS51	5040003790	S.LED	SML-522MU8WT86	T	2.0/37.9
MC51	7700002950	MIC	EM9745P-33-G <HOR>		
S51	2260001900	SWI	SW-149 (SKHLLD)		
S52	2260002800	S.SWI	SW-167 (SKQTLAE010)	B	39.2/1.9
S53	2260002800	S.SWI	SW-167 (SKQTLAE010)	B	48.7/1.9
S54	2250000830	ENC	FSR08-0008A <SLVJ>		
EP2	6910018460	S.BEA	MMZ1005Y102C-T	B	32.8/15.5
EP3	6910018460	S.BEA	MMZ1005Y102C-T	B	63.5/21.3
EP4	6910018460	S.BEA	MMZ1005Y102C-T	T	45.2/28.7
EP5	6910018460	S.BEA	MMZ1005Y102C-T	T	41.0/11.0
EP6	6910014730	S.BEA	MPZ2012S331A-T	B	25.2/21.4
EP7	6910021240	S.BEA	MMZ1005A152ET	B	61.1/30.4
EP8	6910021240	S.BEA	MMZ1005A152ET	B	60.9/33.1
EP51	6910018460	S.BEA	MMZ1005Y102C-T	B	19.1/46.2
EP52	6910021240	S.BEA	MMZ1005A152ET	B	96.5/13.0
EP54	6910016330	S.BEA	MMZ1005S 601CT-S	B	69.9/37.2
EP900	6910016330	S.BEA	MMZ1005S 601CT-S	B	71.1/43.9
EP901	6910016330	S.BEA	MMZ1005S 601CT-S	B	76.7/41.9
EP902	6910016330	S.BEA	MMZ1005S 601CT-S	B	74.5/38.1
EP903	6910016330	S.BEA	MMZ1005S 601CT-S	T	83.2/49.7
EP904	6910016330	S.BEA	MMZ1005S 601CT-S	T	94.4/47.0
EP905	6910016330	S.BEA	MMZ1005S 601CT-S	B	84.5/49.8
EP906	6910016330	S.BEA	MMZ1005S 601CT-S	B	93.2/46.9


**MAIN-A UNIT
(BOTTOM VIEW)**

The diagram shows the bottom view of the Main-A Unit circuit board. It includes a coordinate grid with labels [Lower] and [Upper] along the bottom edge, and [PTT] and [ROTARY SELECTOR] along the right edge. The board is populated with numerous components, including integrated circuits (ICs), transistors (Qs), diodes (Ds), capacitors (Cs), and inductors (Ls). Key components labeled include IC1, IC2, IC3, IC4, IC5, IC6, IC7, IC8, IC9, IC10, IC11, IC12, IC13, IC14, IC15, IC16, IC17, IC18, IC19, IC20, IC21, IC22, IC23, IC24, IC25, IC26, IC27, IC28, IC29, IC30, IC31, IC32, IC33, IC34, IC35, IC36, IC37, IC38, IC39, IC40, IC41, IC42, IC43, IC44, IC45, IC46, IC47, IC48, IC49, IC50, IC51, IC52, IC53, IC54, IC55, IC56, IC57, IC58, IC59, IC60, IC61, IC62, IC63, IC64, IC65, IC66, IC67, IC68, IC69, IC70, IC71, IC72, IC73, IC74, IC75, IC76, IC77, IC78, IC79, IC80, IC81, IC82, IC83, IC84, IC85, IC86, IC87, IC88, IC89, IC90, IC91, IC92, IC93, IC94, IC95, IC96, IC97, IC98, IC99, IC100, IC101, IC102, IC103, IC104, IC105, IC106, IC107, IC108, IC109, IC110, IC111, IC112, IC113, IC114, IC115, IC116, IC117, IC118, IC119, IC120, IC121, IC122, IC123, IC124, IC125, IC126, IC127, IC128, IC129, IC130, IC131, IC132, IC133, IC134, IC135, IC136, IC137, IC138, IC139, IC140, IC141, IC142, IC143, IC144, IC145, IC146, IC147, IC148, IC149, IC150, IC151, IC152, IC153, IC154, IC155, IC156, IC157, IC158, IC159, IC160, IC161, IC162, IC163, IC164, IC165, IC166, IC167, IC168, IC169, IC170, IC171, IC172, IC173, IC174, IC175, IC176, IC177, IC178, IC179, IC180, IC181, IC182, IC183, IC184, IC185, IC186, IC187, IC188, IC189, IC190, IC191, IC192, IC193, IC194, IC195, IC196, IC197, IC198, IC199, IC200, IC201, IC202, IC203, IC204, IC205, IC206, IC207, IC208, IC209, IC210, IC211, IC212, IC213, IC214, IC215, IC216, IC217, IC218, IC219, IC220, IC221, IC222, IC223, IC224, IC225, IC226, IC227, IC228, IC229, IC230, IC231, IC232, IC233, IC234, IC235, IC236, IC237, IC238, IC239, IC240, IC241, IC242, IC243, IC244, IC245, IC246, IC247, IC248, IC249, IC250, IC251, IC252, IC253, IC254, IC255, IC256, IC257, IC258, IC259, IC260, IC261, IC262, IC263, IC264, IC265, IC266, IC267, IC268, IC269, IC270, IC271, IC272, IC273, IC274, IC275, IC276, IC277, IC278, IC279, IC280, IC281, IC282, IC283, IC284, IC285, IC286, IC287, IC288, IC289, IC290, IC291, IC292, IC293, IC294, IC295, IC296, IC297, IC298, IC299, IC300, IC301, IC302, IC303, IC304, IC305, IC306, IC307, IC308, IC309, IC310, IC311, IC312, IC313, IC314, IC315, IC316, IC317, IC318, IC319, IC320, IC321, IC322, IC323, IC324, IC325, IC326, IC327, IC328, IC329, IC330, IC331, IC332, IC333, IC334, IC335, IC336, IC337, IC338, IC339, IC340, IC341, IC342, IC343, IC344, IC345, IC346, IC347, IC348, IC349, IC350, IC351, IC352, IC353, IC354, IC355, IC356, IC357, IC358, IC359, IC360, IC361, IC362, IC363, IC364, IC365, IC366, IC367, IC368, IC369, IC370, IC371, IC372, IC373, IC374, IC375, IC376, IC377, IC378, IC379, IC380, IC381, IC382, IC383, IC384, IC385, IC386, IC387, IC388, IC389, IC390, IC391, IC392, IC393, IC394, IC395, IC396, IC397, IC398, IC399, IC400, IC401, IC402, IC403, IC404, IC405, IC406, IC407, IC408, IC409, IC410, IC411, IC412, IC413, IC414, IC415, IC416, IC417, IC418, IC419, IC420, IC421, IC422, IC423, IC424, IC425, IC426, IC427, IC428, IC429, IC430, IC431, IC432, IC433, IC434, IC435, IC436, IC437, IC438, IC439, IC440, IC441, IC442, IC443, IC444, IC445, IC446, IC447, IC448, IC449, IC450, IC451, IC452, IC453, IC454, IC455, IC456, IC457, IC458, IC459, IC460, IC461, IC462, IC463, IC464, IC465, IC466, IC467, IC468, IC469, IC470, IC471, IC472, IC473, IC474, IC475, IC476, IC477, IC478, IC479, IC480, IC481, IC482, IC483, IC484, IC485, IC486, IC487, IC488, IC489, IC490, IC491, IC492, IC493, IC494, IC495, IC496, IC497, IC498, IC499, IC500, IC501, IC502, IC503, IC504, IC505, IC506, IC507, IC508, IC509, IC510, IC511, IC512, IC513, IC514, IC515, IC516, IC517, IC518, IC519, IC520, IC521, IC522, IC523, IC524, IC525, IC526, IC527, IC528, IC529, IC530, IC531, IC532, IC533, IC534, IC535, IC536, IC537, IC538, IC539, IC540, IC541, IC542, IC543, IC544, IC545, IC546, IC547, IC548, IC549, IC550, IC551, IC552, IC553, IC554, IC555, IC556, IC557, IC558, IC559, IC560, IC561, IC562, IC563, IC564, IC565, IC566, IC567, IC568, IC569, IC570, IC571, IC572, IC573, IC574, IC575, IC576, IC577, IC578, IC579, IC580, IC581, IC582, IC583, IC584, IC585, IC586, IC587, IC588, IC589, IC590, IC591, IC592, IC593, IC594, IC595, IC596, IC597, IC598, IC599, IC600, IC601, IC602, IC603, IC604, IC605, IC606, IC607, IC608, IC609, IC610, IC611, IC612, IC613, IC614, IC615, IC616, IC617, IC618, IC619, IC620, IC621, IC622, IC623, IC624, IC625, IC626, IC627, IC628, IC629, IC630, IC631, IC632, IC633, IC634, IC635, IC636, IC637, IC638, IC639, IC640, IC641, IC642, IC643, IC644, IC645, IC646, IC647, IC648, IC649, IC650, IC651, IC652, IC653, IC654, IC655, IC656, IC657, IC658, IC659, IC660, IC661, IC662, IC663, IC664, IC665, IC666, IC667, IC668, IC669, IC670, IC671, IC672, IC673, IC674, IC675, IC676, IC677, IC678, IC679, IC680, IC681, IC682, IC683, IC684, IC685, IC686, IC687, IC688, IC689, IC690, IC691, IC692, IC693, IC694, IC695, IC696, IC697, IC698, IC699, IC700, IC701, IC702, IC703, IC704, IC705, IC706, IC707, IC708, IC709, IC710, IC711, IC712, IC713, IC714, IC715, IC716, IC717, IC718, IC719, IC720, IC721, IC722, IC723, IC724, IC725, IC726, IC727, IC728, IC729, IC730, IC731, IC732, IC733, IC734, IC735, IC736, IC737, IC738, IC739, IC740, IC741, IC742, IC743, IC744, IC745, IC746, IC747, IC748, IC749, IC750, IC751, IC752, IC753, IC754, IC755, IC756, IC757, IC758, IC759, IC760, IC761, IC762, IC763, IC764, IC765, IC766, IC767, IC768, IC769, IC770, IC771, IC772, IC773, IC774, IC775, IC776, IC777, IC778, IC779, IC780, IC781, IC782, IC783, IC784, IC785, IC786, IC787, IC788, IC789, IC790, IC791, IC792, IC793, IC794, IC795, IC796, IC797, IC798, IC799, IC800, IC801, IC802, IC803, IC804, IC805, IC806, IC807, IC808, IC809, IC810, IC811, IC812, IC813, IC8

[illegible]


8

• MAIN-A UNIT (2/3)

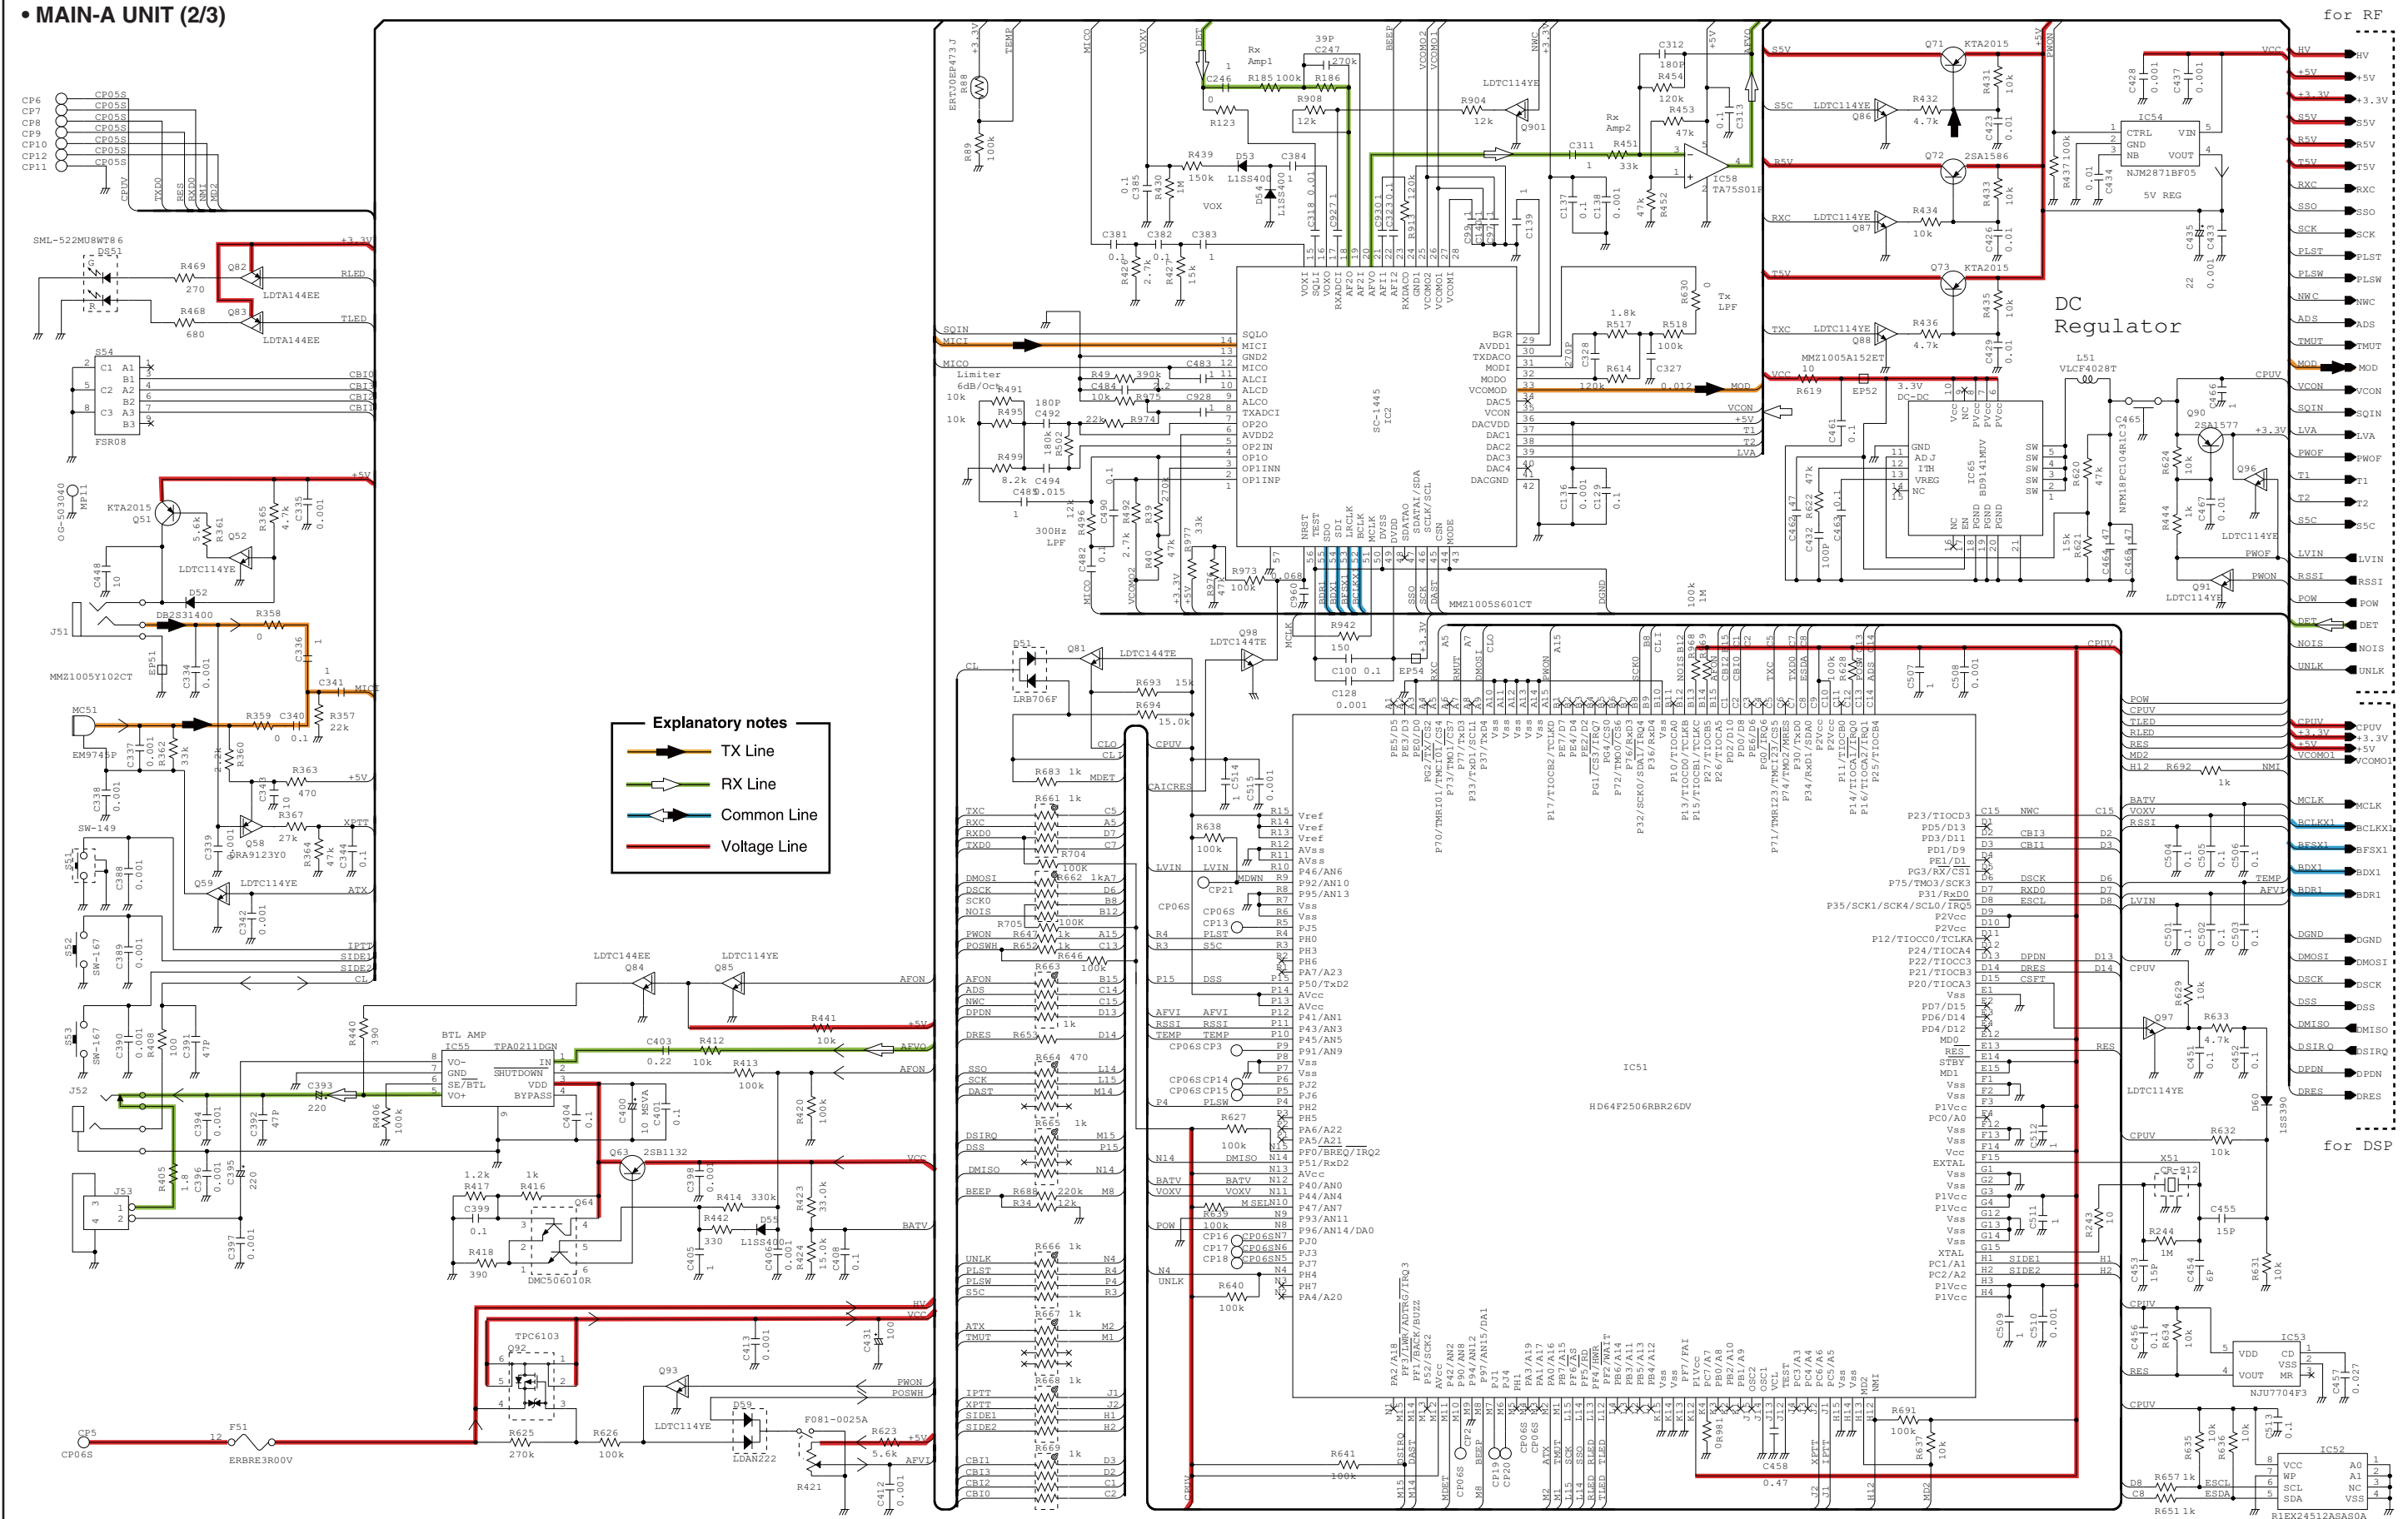

*: Refer to the PARTS LIST for the value and name of component.

• MAIN-A UNIT (3/3)

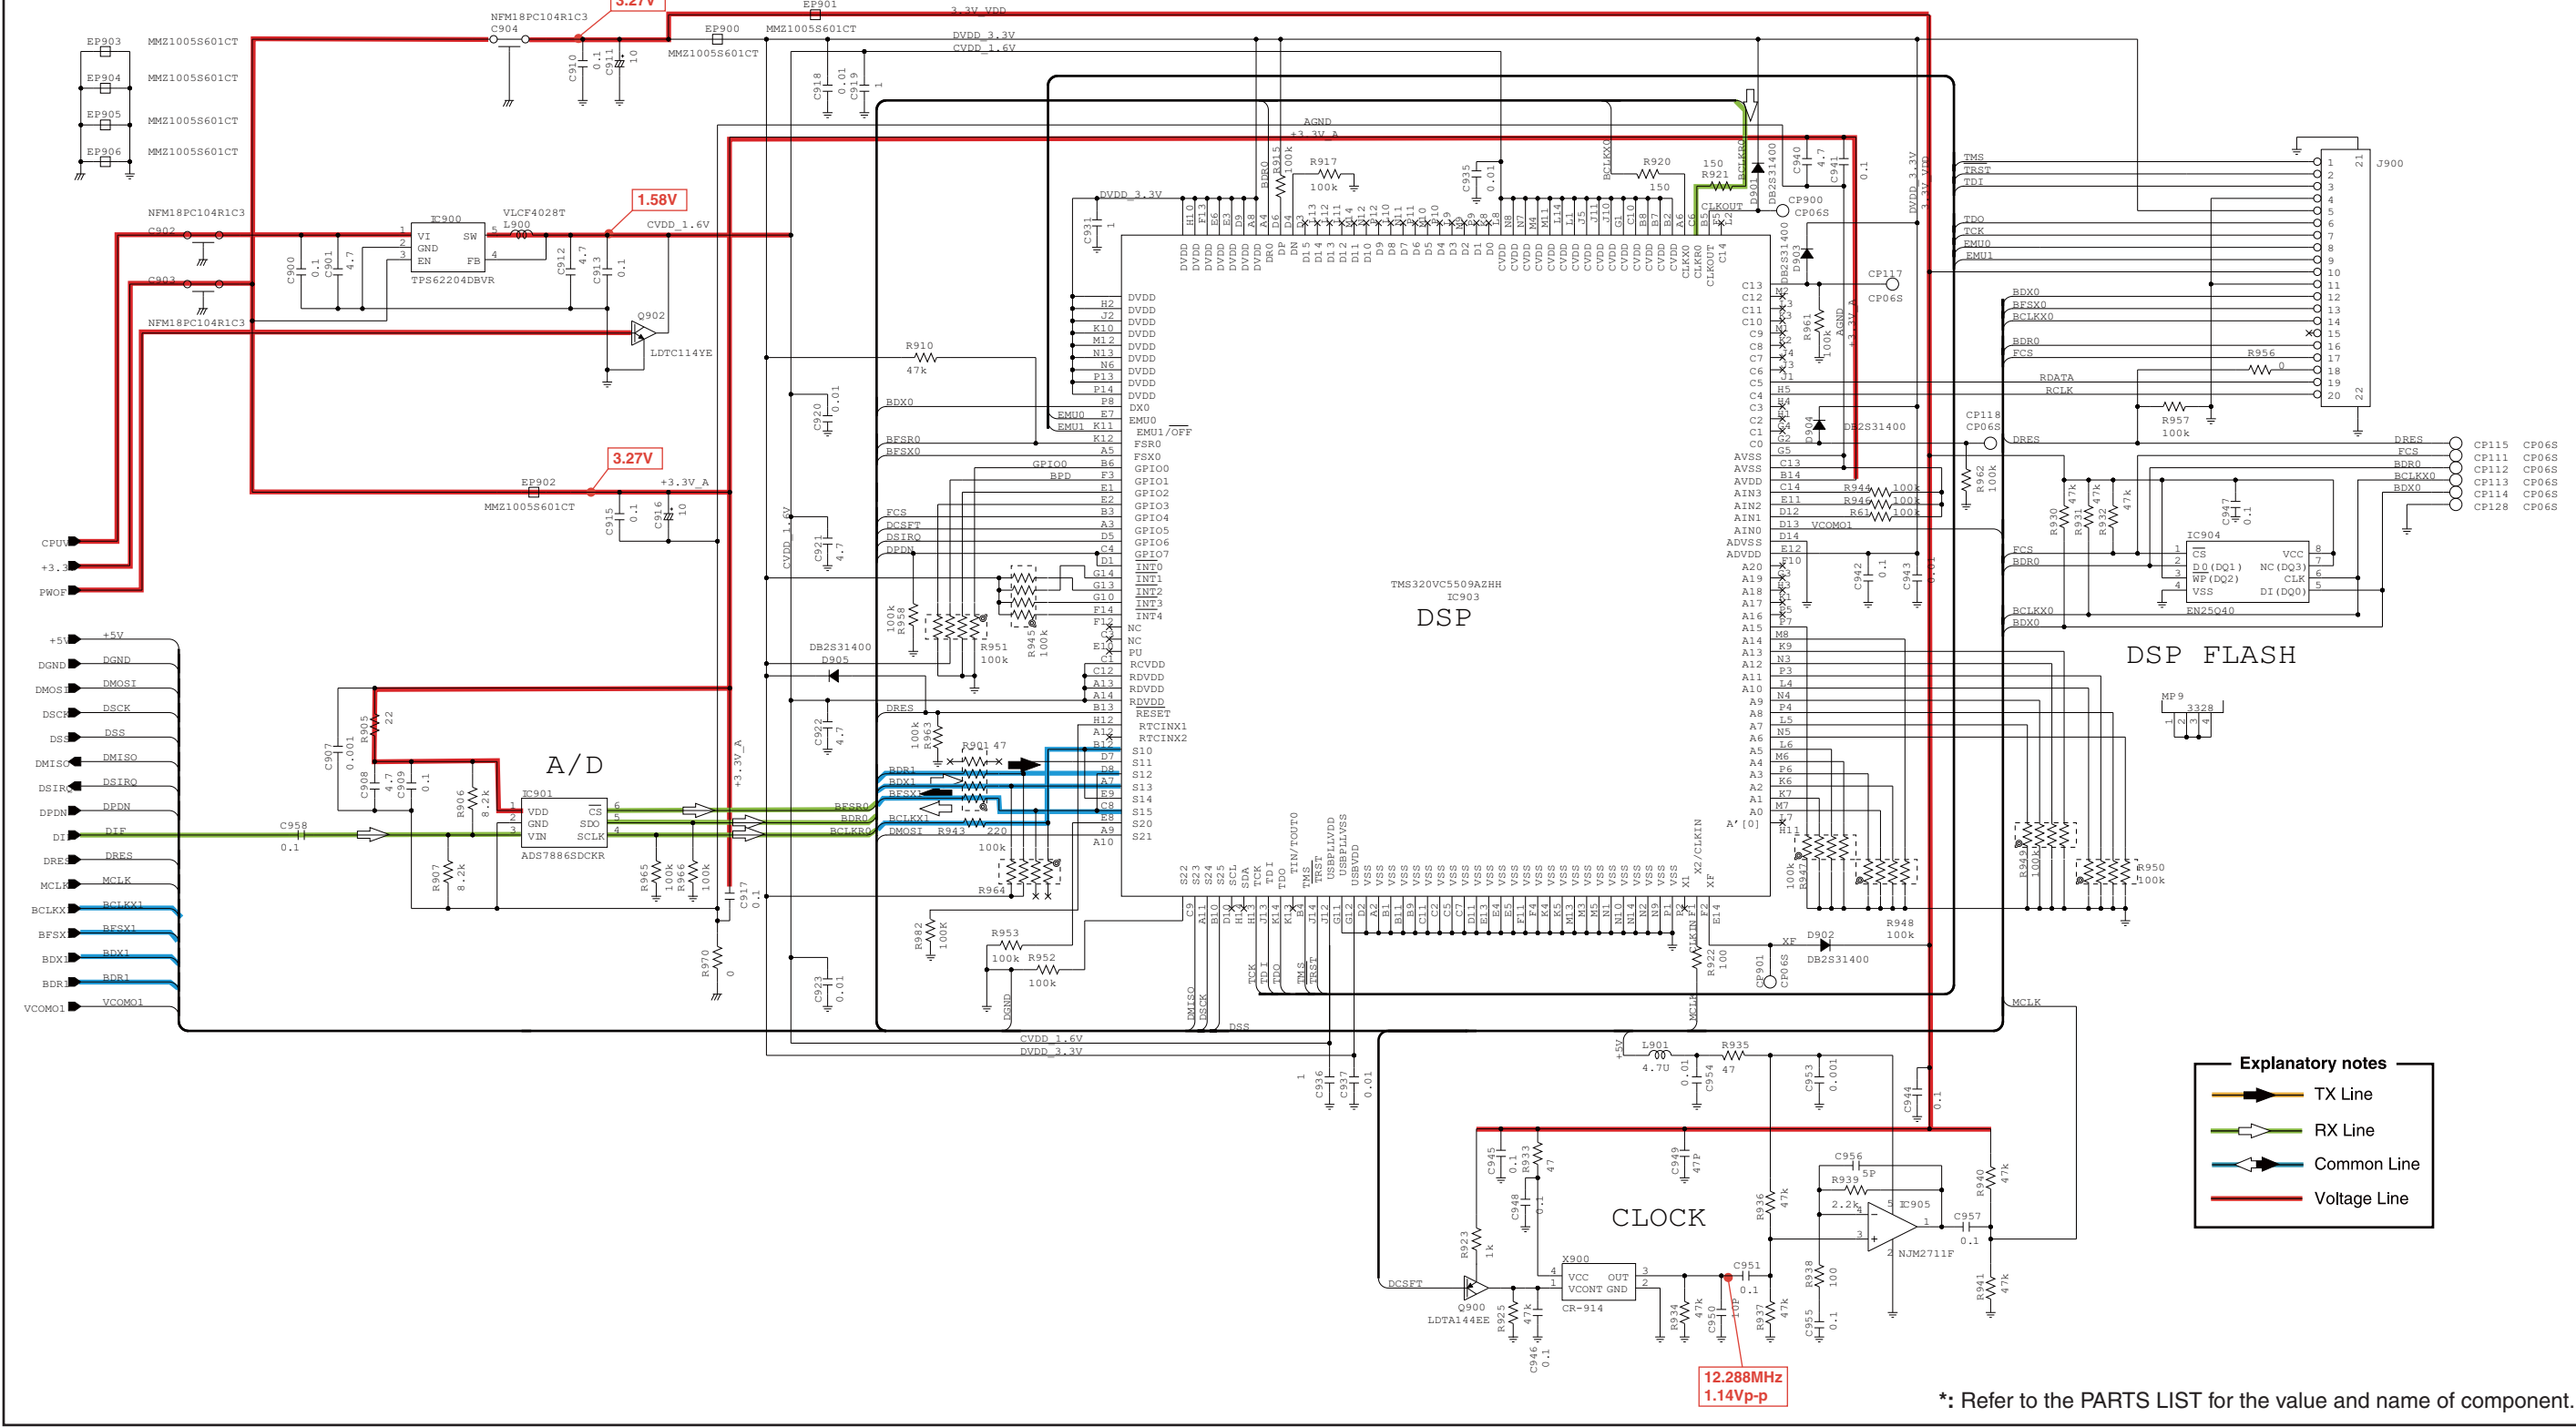

IC-F3100D series


CONTENTS

REPLACEMENT PAGES	5-2, 5-6, 5-7 and 7-1 to 7-3
PARTS LIST	1
BOARD LAYOUTS	11
BLOCK DIAGRAM	15
VOLTAGE DIAGRAM	16

[UNIT LIST]

Model	Version Number	Version	Channel spacing (kHz)
IC-F3101D	[#01]	USA-01	6.25/12.5/25.0
	[#02]	USA-11	
IC-F3102D	[#05]	EUR-01	6.25/12.5/25.0
	[#06]	UK-01	
	[#07]	EUR-11	6.25/12.5/20.0/25.0
	[#08]	UK-11	6.25/12.5/25.0
	[#51]	DPM-01	6.25/12.5/20.0/25.0
	[#52]	DPM-02	
IC-F3103D	[#11]	EXP-01	6.25/12.5/25.0
	[#12]	EXP-02	
	[#13]	EXP-11	
	[#14]	EXP-12	
	[#15]	AUS-01	
	[#18]	AUS-11	
IC-F3106D	[#53]	DPM-01	
	[#16]	RUS-01	
IC-F3108D	[#19]	RUS-11	
	[#17]	CHN-01	
	[#20]	CHN-11	

CONNECTION

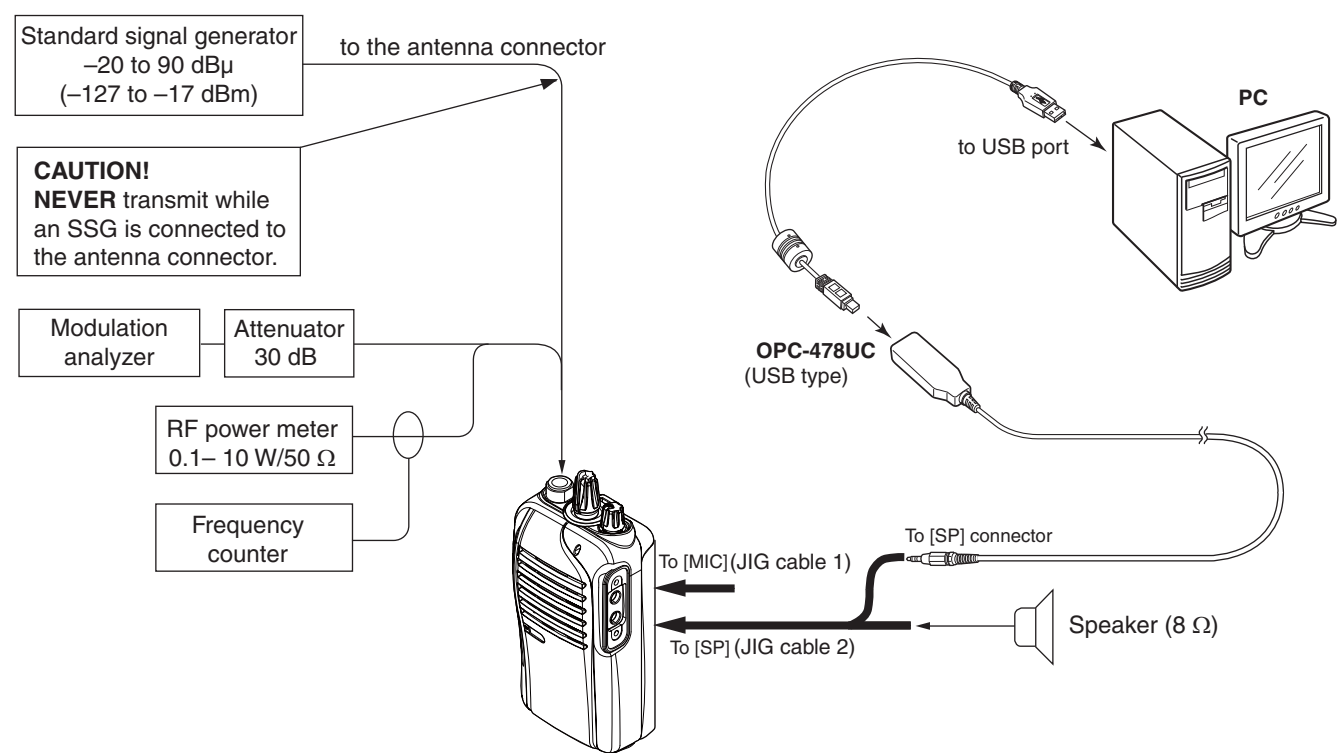


ADJUSTMENT CHANNELS

Before starting the adjustments, use the cloning software to create the same cloning file as shown below, then upload it into the transceiver.

CH	Frequency (MHz)						C.Tone		Text	TOT	RF PWR	PW Sas	CH Type
	RX	TX	TX Inh	Beat Cancel	W/N	SQL Tight	RX	TX					
1- 1	174.000000	<-		OFF	W						L1		Analog
1- 2	136.000000	<-		OFF	W						L1		Analog
1- 3	155.000000	<-		OFF	W						H		Analog
1- 4	155.000000	<-		OFF	W						L2		Analog
1- 5	136.000000	<-		OFF	N						L1		Analog
1- 6	155.000000	<-		OFF	N						L1		Analog
1- 7	174.000000	<-		OFF	N						L1		Analog
1- 8	155.000000	<-		OFF	W						L1		Analog
1- 9	136.000000	<-		OFF	W						L1		Digital
1- 10	155.000000	<-		OFF	W						L1		Digital
1- 11	174.000000	<-		OFF	W						L1		Digital
1- 12	155.000000	<-		OFF	W			151.4			L1		Analog
1- 13	155.000000	<-		OFF	N			151.4			H		Analog
1- 14	155.000000	<-		OFF	W			007N			L1		Analog
1- 15	155.000000	<-		OFF	N			007N			L1		Analog
1- 16	155.000000	<-		OFF	W						L1		Analog
1- 17	136.000000	<-	i	OFF	N						H		Analog
New													



CONVENIENT: The cloning data file for the adjustment, as described in this service manual, is attached.
Right click the clip icon, and select "Save Embedded File to Disk."



5-3 TRANSMIT ADJUSTMENTS (Continued)

1) Select an adjustment item using [↑]/[↓] on the PC's keyboard.

2) Set or modify the adjustment value as specified using [←]/[→] on the PC's keyboard, then push [ENTER].

ADJUSTMENT		TRANSCIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
MODULATION BALANCE	1	• Set [MOD(NARROW)] to "80" on the "Adjust Utility" screen.		[MOD(NARROW)]	80
	2	• Set the TX mode to "2" on the "ADJUSTMENT UTILITY" screen.		[TX MODE]	2
	3	• Push [ENTER] on the PC's keyboard, to enter the modulation balance adjustment mode.		[BAL Start]	—
-Band low-	4	• Channel : 1-5 • Transmitting	• Connect a modulation analyzer with an oscilloscope to the antenna connector through an attenuator, and set it as; HPF : OFF LPF : 15 kHz De-emphasis : OFF Detector : (P-P)/2	[BAL 1]	As flat as possible.   No over or under shoot
-Band center-	5	• Channel : 1-6 • Transmitting		[BAL 2]	
-Band high-	6	• Channel : 1-7 • Transmitting		[BAL 3]	
	7	• Push [ENTER] on the PC's keyboard, to store the value and quit the modulation balance adjustment mode.		[BAL Start]	—
FM DEVIATION (Narrow)	1	• Channel : 1-4 • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[MOD (Narrow)]	±2.05 to ±2.15 kHz* ¹ ±2.20 to ±2.30 kHz* ²
(Wide)	2	• Channel : 1-6 • Transmitting	• Connect as audio generator to the [MIC] jack, and set it as; Frequency : 1 kHz Waveform : Sine wave Level : 150 mVrms	[MOD (Wide)]	±4.05 to ±4.15 kHz* ¹ ±4.45 to ±4.55 kHz* ²
(Middle)	3	• Channel : 1-4 • Transmitting		[MOD (Middle)]	±3.55 to ±3.65 kHz* ²
DIGITAL DEVIATION (Narrow)	1	• Channel : 1-9 • Transmitting	1) Set the TX mode to "16" on the "ADJUSTMENT UTILITY" screen. 2) Push [ENTER] on the PC's keyboard, to enter the digital deviation adjustment mode.	[MOD D Start]	—
	2		• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[MOD D L]	±1.36 to ±1.40 kHz
	3	• Channel : 1-10 • Transmitting	• Connect as audio generator to the MIC jack, and set it as; Frequency : 1 kHz Waveform : Sine wave Level : 150 mVrms	[MOD D C]	
	4	• Channel : 1-11 • Transmitting		[MOD D H]	
	5		• Push [ENTER] on the PC's keyboard, to store the value and quit the digital deviation adjustment mode.	[MOD D Start]	—
CTCSS DEVIATION (Wide)*³	1	• Channel : 1-12 • No AF input from the MIC. • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[CTCSS]	±0.65 to ±0.75 kHz
(Narrow)*⁴	2	• Channel : 1-13 • Transmitting			±0.30 to ±0.40 kHz
DTCS DEVIATION (Wide)*³	1	• Channel : 1-14 • No AF input from the MIC. • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[DTCS]	±0.65 to ±0.75 kHz
(Narrow)*⁴	2	• Channel : 1-15 • Transmitting			±0.30 to ±0.40 kHz
2/5 TONE, DTMF DEVIATION	1	• Channel : 1-16 • Transmitting	1) Set the TX mode to "5" on the "ADJUSTMENT UTILITY" screen. 2) Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[S.Tone]	±1.45 to ±1.55 kHz

*¹: For all models except [EUR], [UK]. *²: For [EUR], [UK]. *³: For all models except [USA]. *⁴: For only [USA].

5-4 RECEIVE ADJUSTMENTS

1) Select an adjustment item using [↑]/[↓] on the PC's keyboard.

2) Set or modify the adjustment value as specified using [←]/[→] on the PC's keyboard, then push [ENTER].

ADJUSTMENT	TRANSCIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
SENSITIVITY (For only [EUR-01] and [UK-01])	NOTE: "RECEIVE SENSITIVITY" must be adjusted before "S-METER." Otherwise, "S-METER" will not be adjusted properly. When "RECEIVE SENSITIVITY" is re-adjusted, "S-METER" must be also re-adjusted.			
	1	• Channel : 1-17 • Receiving	• Connect an SSG to the antenna connector and set it as; Frequency : 136 MHz Level† : +20 dBμ (−87 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz	[BPF C ALL] Push [ENTER] (Automatic adjustment)
	2			[BPFT1 C] 70
S-METER	1	• Channel : 1-17 • Receiving	• Connect an SSG to the antenna connector and set it as; Frequency : 136 MHz Level† : +23 dBμ (−84 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz	[RSSI S3 Level] Push [ENTER] (Automatic adjustment)
	2	• Channel : 1-17 • Receiving	• Set the SSG as; Level† : −7 dBμ (−114 dBm)	[RSSI S1 Level]
SQUELCH	1	• Channel : 1-17 • Receiving	1) Connect an SSG to the antenna connector and set it as; Frequency : 136 MHz Level† : −13 dBμ (−120 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz 2) Once close the squelch by increasing [SQL] value, and then decrease the value to open the squelch.	[SQL] Squelch opens (Push [ENTER] to store the value)

†; The output level of the standard signal generator (SSG) is indicated as the SSG's open circuit.

SECTION 7

MECHANICAL PARTS

[UNIT LIST]

Model	Version	Version Number
IC-F3101D	USA-01	[#01]
	USA-11	[#02]
IC-F3102D	EUR-01	[#05]
	UK-01	[#06]
	EUR-11	[#07]
	UK-11	[#08]
	DPM-01	[#51]
	DPM-02	[#52]
IC-F3103D	EXP-01	[#11]
	EXP-02	[#12]
	EXP-11	[#13]
	EXP-12	[#14]
	AUS-01	[#15]
	AUS-11	[#18]
	DPM-01	[#53]
IC-F3106D	RUS-01	[#16]
	RUS-11	[#19]
IC-F3108D	CHN-01	[#17]
	CHN-11	[#20]

[CHASSIS PARTS]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
J1	6910021491	ANT CONNECTOR 106-1 <SSC>	1
SP1	2510001560	045P01202-02	1
W1	8900009640	OPC-963	1
MP1	8010022041	3286 CHASSIS-1 2X2	[#01] 1
	8010022041	3286 CHASSIS-1 2X2	[#02] 1
	8010022041	3286 CHASSIS-1 2X2	[#05] 1
	8010022041	3286 CHASSIS-1 2X2	[#06] 1
	8010022041	3286 CHASSIS-1 2X2	[#07] 1
	8010022041	3286 CHASSIS-1 2X2	[#08] 1
	8010022041	3286 CHASSIS-1 2X2	[#11] 1
	8010022041	3286 CHASSIS-1 2X2	[#12] 1
	8010022041	3286 CHASSIS-1 2X2	[#13] 1
	8010022041	3286 CHASSIS-1 2X2	[#14] 1
	8010022041	3286 CHASSIS-1 2X2	[#15] 1
	8010022041	3286 CHASSIS-1 2X2	[#16] 1
	8010021951	3285 CHASSIS (A)-1 NI-P 2X2	[#17] 1
	8010022041	3286 CHASSIS-1 2X2	[#18] 1
	8010022041	3286 CHASSIS-1 2X2	[#19] 1
	8010021951	3285 CHASSIS (A)-1 NI-P 2X2	[#20] 1
	8010022041	3286 CHASSIS-1 2X2	[#51] 1
	8010022041	3286 CHASSIS-1 2X2	[#52] 1
	8010022041	3286 CHASSIS-1 2X2	[#53] 1
MP2	8210026490	3328 FRONT PANEL ASSEMBLY	1
MP10	8930082160	3285 NAME SHEET (A)	1
MP11	8930081140	3328 LENS	1
MP12	8930080620	O-RING (CF) <KRI>	1
MP13	8930080630	3285 SP PLATE Y1174	1
MP14	8930042350	1922 MIC SHEET	1
MP15	8930080410	3285 MIC SPONGE	1
MP16	8930079900	3285 TERMINAL HOLDER	1
MP17	8930080100	3285 PLUS TERMINAL	1
MP18	8930080400	3285 MINUS TERMINAL	1
MP19	8930069710	THERMAL SHEET (BC) TC200HS-1.4 (7.9X7)	1
MP20	8830003390	VR NUT (AB)	2
MP21	8930080092	3285 SIDE PLATE-2 Y1173B	1
MP22	8930080150	3285 SIDE SEAL <KRI>	1
MP23	8930080140	3285 TOP SEAL <KRI>	1
MP24	8830003440	3285 ANT NUT	1
MP25	8610014180	KNOB N-389	1
MP27	8610014190	KNOB N-390	1
MP31	8810008761	PHBT M2 X 8 NI-ZC3	2
MP32	8810009511	PHBT M2 X 4 NI-ZC3 (3.6-4.0)	9
MP33	8810009511	PHBT M2 X 4 NI-ZC3 (3.6-4.0)	1
MP34	8810009181	BT M2 X 5 NI-ZC3	2
MP35	8930066240	SPONGE (IM)	1

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	ORDER NO.	DESCRIPTION	QTY.
J51	6450000131	HSJ1102-018540	1
J52	6450002250	HSJ1456-010320	1
J53*	6510021901	BM02B-ASRS-TF (LF) (SN)	1
F51*	5210001160	ERBRE3R00V	1
MC51	7700002950	EM9745P-33-G <HOR>	1
S51	2260001900	SW-149 (SKHLLD)	1
S52*	2260002800	SW-167 (SKQTLAE010)	1
S53*	2260002800	SW-167 (SKQTLAE010)	1
S54	2250000830	FSR08-0008A <SLVJ>	1
MP2	8510016461	2775 VCO COVER-1	1
MP3*	8510016471	2775 VCO CASE-1	1
MP4*	6910014760	OG-503040	1
MP5*	6910014760	OG-503040	1
MP8	8510020110	3328 SHIELD PLATE Y1222	1
MP9*	8510019920	3328 DSP CASE Y1212	1
MP10	8510019930	3328 DSP COVER Y1213	1
MP11*	6910014760	OG-503040	1
MP12	8930082300	DOUBLE SIDE TAPE (BK)	1
MP13	8930082310	3328 K-PLATE Y2158	1
MP16*	6910014760	OG-503040	[#05] 1
	6910014760	OG-503040	[#06] 1

*: Refer to "BOARD LAYOUTS" for the location.

Screw abbreviations A, B0, BT: Self-tapping PH: Pan head ZK: Black NI-ZU: Nickel-Zinc SUS: Stainless

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])


REF NO.	ORDER NO.	DESCRIPTION	QTY.
J51*	6450000131	HSJ1102-018540	1
J52*	6450002250	HSJ1456-010320	1
J53*	6510021901	BM02B-ASRS-TF (LF) (SN)	1
F51*	5210001160	ERBRE3R00V	1
MC51	7700002950	EM9745P-33-G <HOR>	1
S51	2260001900	SW-149 (SKHLLD)	1
S52*	2260002800	SW-167 (SKQTLAE010)	1
S53*	2260002800	SW-167 (SKQTLAE010)	1
S54	2250000830	FSR08-0008A	1
MP2	8510016461	2775 VCO COVER-1	1
MP3*	8510016471	2775 VCO CASE-1	1
MP4*	6910014760	OG-503040	1
MP5*	6910014760	OG-503040	1
MP8	8510020110	3328 SHIELD PLATE Y1222	1
MP9*	8510019920	3328 DSP CASE Y1212	1
MP10	8510019930	3328 DSP COVER Y1213	1
MP11*	6910014760	OG-503040	1
MP12	8930082300	DOUBLE SIDE TAPE (BK)	1
MP13	8930082310	3328 K-PLATE Y2158	1
MP16*	6910014760	OG-503040	1

[ACCESSORIES]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
MP1	(Optional)	MB-124	[#01] 1
	(Optional)	MB-124	[#02] 1
	(Optional)	MB-124	[#05] 1
	(Optional)	MB-124	[#06] 1
	(Optional)	MB-124	[#07] 1
	(Optional)	MB-124	[#08] 1
	(Optional)	MB-124	[#11] 1
	(Optional)	MB-124	[#12] 1
	(Optional)	MB-124	[#13] 1
	(Optional)	MB-124	[#14] 1
	(Optional)	MB-124	[#15] 1
	(Optional)	MB-124	[#16] 1
	(Optional)	MB-124	[#18] 1
	(Optional)	MB-124	[#19] 1
	(Optional)	MB-124	[#51] 1
	(Optional)	MB-124	[#52] 1
	(Optional)	MB-124	[#53] 1
MP2	8210025840	3285 JACK PANEL	1
MP3	8810004861	PH M2 X 6 ZK3	2

[ACCESSORIES]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
EP1	(Optional)	FA-SC55V-2	1
EP2	(Optional)	BP-265	[#01] 1
	(Optional)	BP-265	[#02] 1
	(Optional)	BP-265	[#05] 1
	(Optional)	BP-265	[#06] 1
	(Optional)	BP-265	[#07] 1
	(Optional)	BP-265	[#08] 1
	(Optional)	BP-265	[#11] 1
	(Optional)	BP-265	[#12] 1
	(Optional)	BP-265	[#13] 1
	(Optional)	BP-265	[#14] 1
	(Optional)	BP-265	[#15] 1
	(Optional)	BP-265	[#16] 1
	(Optional)	BP-265	[#18] 1
	(Optional)	BP-265	[#19] 1
	(Optional)	BP-265	[#51] 1
	(Optional)	BP-265	[#52] 1
	(Optional)	BP-265	[#53] 1
EP3	(Optional)	BC-193	[#01] 1
	(Optional)	BC-193	[#02] 1
	(Optional)	BC-193	[#05] 1
	(Optional)	BC-193	[#06] 1
	(Optional)	BC-193	[#07] 1
	(Optional)	BC-193	[#08] 1
	(Optional)	BC-193	[#11] 1
	(Optional)	BC-193	[#12] 1
	(Optional)	BC-193	[#13] 1
	(Optional)	BC-193	[#14] 1
	(Optional)	BC-193	[#15] 1
	(Optional)	BC-193	[#16] 1
	(Optional)	BC-193	[#18] 1
	(Optional)	BC-193	[#19] 1
	(Optional)	BC-193	[#51] 1
	(Optional)	BC-193	[#52] 1
	(Optional)	BC-193	[#53] 1
EP4	(Optional)	BC-123SA	[#01] 1
	(Optional)	BC-123SA	[#02] 1
	(Optional)	BC-123SE	[#05] 1
	(Optional)	BC-123SE	[#07] 1
	(Optional)	BC-123SA	[#11] 1
	(Optional)	BC-123SE	[#12] 1
	(Optional)	BC-123SA	[#13] 1
	(Optional)	BC-123SE	[#14] 1
	(Optional)	BC-123SV	[#15] 1
	(Optional)	BC-123SE	[#16] 1
	(Optional)	BC-123SV	[#18] 1
	(Optional)	BC-123SE	[#19] 1
	(Optional)	BC-123SE	[#51] 1
	(Optional)	BC-123SA	[#53] 1

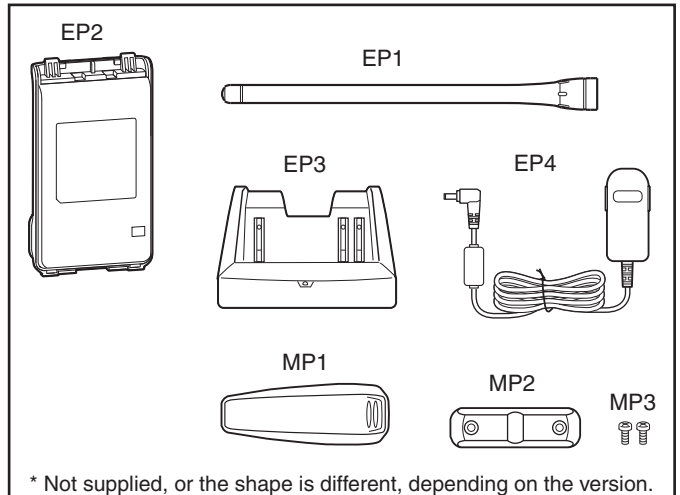

*: Refer to "BOARD LAYOUTS" for the location.

Screw abbreviations


A, B0, BT: Self-tapping

PH: Pan head

ZK: Black

NI-ZU: Nickel-Zinc

SUS: Stainless



PARTS LIST

[UNIT LIST]

Model	Version	Version Number
IC-F3101D	USA-01	[#01]
	USA-11	[#02]
IC-F3102D	EUR-01	[#05]
	UK-01	[#06]
	EUR-11	[#07]
	UK-11	[#08]
	DPM-01	[#51]
	DPM-02	[#52]
IC-F3103D	EXP-01	[#11]
	EXP-02	[#12]
	EXP-11	[#13]
	EXP-12	[#14]
	AUS-01	[#15]
	AUS-11	[#18]
	DPM-01	[#53]
IC-F3106D	RUS-01	[#16]
	RUS-11	[#19]
IC-F3108D	CHN-01	[#17]
	CHN-11	[#20]

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110002751	S.IC TA75S01F(TE85RF)	T	32.5/8.9
IC3	1110007320	S.IC NJM2591V-TE1-#ZZZB	B	45.8/38.9
IC4	1130015271	S.IC AK1541P4-L	T	43.2/24.0
IC5	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	68.3/44.2
IC6	1130011741	S.IC TC7W66FK(TE85LF)	B	65.3/26.7
IC21	1110002751	S.IC TA75S01F(TE85RF)	T	69.8/34.6
IC51	1140015010	S.IC HD64F2506RBR26DV(EMPTY)	B	83.0/14.3
IC52	1130015080	S.IC R1EX24512ASAS0A	T	83.7/16.4
IC53	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	T	85.0/11.3
IC54	1180003600	S.REG NJM2871BF05-TE1-#ZZZB	T	15.5/34.9
IC55	1110007610	S.IC TPA0211DGNR	B	13.3/42.1
IC57	1110007290	S.IC AK2330P-L	B	72.3/24.5
IC58	1110002751	S.IC TA75S01F(TE85RF)	T	23.9/28.3
IC60	1110005320	S.IC NJM13403V-TE1-#ZZZB	B	65.1/8.3
IC62	1130011741	S.IC TC7W66FK(TE85LF)	T	60.9/11.3
IC63	1110007630	S.IC NJM2783V-TE1-#ZZZH	T	71.9/9.8
IC64	1110005330	S.IC NJM12904V-TE1-#ZZZB	T	67.1/9.8
IC65	1180003670	S.REG BD9141MUV-E2	T	96.5/9.1
IC66	1130009981	S.IC TC7W53FK(TE85LF)	T	75.9/8.5
IC900	1180003680	S.REG TPS62204DBVR	T	76.4/39.0
IC901	1190002900	S.IC ADS7886SDCKR	T	77.5/32.5
IC902	1110007770	S.IC PCM3008T/2K	B	78.6/34.7
IC903	1140013290	S.IC TMS320VC5509AZHH <FE>	T	86.8/36.8
IC904	1130015620	S.IC EN25Q40-100GIP <MSK>	T	78.0/28.4
IC905	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	80.2/46.0
Q1	1560001700	S.FET RD07MUS2B-T112	B	28.6/13.5
Q2	1560001241	S.FET RD01MUS1-T113	B	36.3/14.4
Q3	1530003311	S.TRA 2SC5107-O(TE85RF)	B	42.2/13.1
Q6	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	35.6/5.7
Q8	1530003311	S.TRA 2SC5107-O(TE85RF)	T	54.8/18.5
Q9	1530003311	S.TRA 2SC5107-O(TE85RF)	B	55.9/18.5
Q10	1530003311	S.TRA 2SC5107-O(TE85RF)	T	60.7/18.5
Q11	1590004070	S.TRA LDTC144EET1G <SLVJ>	B	54.9/23.8
Q12	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	62.5/23.3
Q13	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	57.5/23.6
Q14	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	60.0/23.6
Q15	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	64.2/18.7
Q16	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	68.2/21.9
Q17	1560000541	S.FET 2SK880-Y(T5RICOMF)	B	50.9/29.7
Q21	1560000841	S.FET 2SK1829(TE85RF)	B	28.4/30.5
Q22	1580000731	S.FET 3SK293(TE85LF)	B	25.1/27.8
Q23	1580000731	S.FET 3SK293(TE85LF)	B	36.4/26.1
Q24	1530003311	S.TRA 2SC5107-O(TE85RF)	B	38.3/42.6
Q26	1530002851	S.TRA 2SC4116-BL(TE85RF)	T	43.3/32.7
Q27	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	56.3/35.9
Q28	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	63.6/44.7
Q29	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	38.5/42.6
Q51	1510001090	S.TRA KTA2015Y-RTK/P	B	25.7/43.5
Q52	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	24.6/39.8
Q58	1590004220	S.TRA DRA9123Y0L	B	54.9/7.1
Q59	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	49.1/7.3
Q63	1520000460	S.TRA 2SB1132 T100 R	B	15.3/35.5
Eqv.	1520000910	S.TRA 2SB1132L-R-AB3-R <SLVJ>		
Q64	1590004590	S.TRA DMC506010R	B	19.3/36.0
Q67	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	75.4/13.1
Q71	1510001090	S.TRA KTA2015Y-RTK/P	B	66.9/16.6
Q72	1510000771	S.TRA 2SA1586-GR(TE85LF)	B	65.8/37.4
Q73	1510001090	S.TRA KTA2015Y-RTK/P	B	70.2/12.5
Q81	1590004100	S.TRA LDTC144TET1G <SLVJ>	B	93.4/20.3
Q82	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	79.1/19.5
Q83	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	78.5/17.5
Q84	1590004070	S.TRA LDTC144EET1G <SLVJ>	B	19.2/43.8
Q85	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	21.5/33.0
Q86	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	70.6/16.3
Q87	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	68.5/35.7
Q88	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	72.5/12.3
Q90	1510000920	S.TRA 2SA1577 T106 Q	T	92.4/12.8
Q91	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	90.1/14.8
Q92	1590003321	S.FET TPC6103(TE85LF)	B	6.9/35.0
Q93	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	4.0/34.6
Q95	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	68.5/33.2
Q900	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	73.5/48.8
Q901	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	75.1/27.8
D1	1750001910	S.DIO HVD144AKRF-E	B	16.2/16.3
D5	1750001890	S.DIO HVD142AKRF-E	B	49.6/15.2
D6	1750001890	S.DIO HVD142AKRF-E	B	49.6/16.6
D7	1750001820	S.DIO LRB706F-40T1G <SLVJ>	T	17.9/10.5
D8	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	14.5/14.2
D10	1750002170	S.DIO DB2S31400L	B	63.1/16.7
D11	1750001880	S.VAR HVL375CKRF-E	T	57.4/29.2
D12	1750001550	S.VAR HVD376BKRF-E	T	54.1/25.6
D13	1750001550	S.VAR HVD376BKRF-E	T	55.1/25.6
D14	1750001880	S.VAR HVL375CKRF-E	T	59.3/27.1
D15	1750001570	S.VAR HVL355CMKRF-E	T	59.3/29.2
D16	1750001550	S.VAR HVD376BKRF-E	T	63.7/25.1
D17	1750001550	S.VAR HVD376BKRF-E	T	62.8/23.2
D21	1750001810	S.DIO L1SS400T1G <SLVJ>	B	30.3/32.4
D22	1750001910	S.DIO HVD144AKRF-E	B	16.2/20.5
D23	1750001910	S.DIO HVD144AKRF-E	B	14.1/23.1
D24	1750001880	S.VAR HVL375CKRF-E	B	17.4/27.8
D26	1750001880	S.VAR HVL375CKRF-E	B	18.6/27.8
D28	1750001780	S.VAR HVB350BYPTL-E	B	31.0/27.8
D31	1750001910	S.DIO HVD144AKRF-E	B	40.3/30.1
D32	1750001910	S.DIO HVD144AKRF-E	T	36.6/28.4

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
D33	1750001910	S.DIO HVD144AKRF-E	B	36.7/39.8
D34	1750001910	S.DIO HVD144AKRF-E	T	36.5/41.0
D36	1750000571	S.DIO 1SS381(TPH3F)	B	54.1/40.0
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D37	1750000571	S.DIO 1SS381(TPH3F)	B	51.7/36.8
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D38	1750000571	S.DIO 1SS381(TPH3F)	B	56.6/40.0
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D39	1750000571	S.DIO 1SS381(TPH3F)	B	58.1/38.6
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D51	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	91.9/17.8
D52	1750002170	S.DIO DB2S31400L	T	26.2/41.0
D53	1750001810	S.DIO L1SS400T1G <SLVJ>	T	61.8/6.8
D54	1750001810	S.DIO L1SS400T1G <SLVJ>	T	60.5/6.8
D55	1750001810	S.DIO L1SS400T1G <SLVJ>	B	22.8/34.9
D59	1750001850	S.DIO LDAN222T1G <SLVJ>	B	4.2/37.5
D60	1750000571	S.DIO 1SS381(TPH3F)	B	85.0/23.6
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D901	1750002170	S.DIO DB2S31400L	T	87.1/27.9
D902	1750002170	S.DIO DB2S31400L	B	86.2/44.9
D903	1750002170	S.DIO DB2S31400L	B	92.1/30.8
D904	1750002170	S.DIO DB2S31400L	T	88.4/27.9
D905	1750002170	S.DIO DB2S31400L	B	96.3/30.8
F11	2030000870	S.MON MFT46.3P3 46.350 MHz (FL-442)	B	35.4/34.1
F12	2010002760	S.XTA MFT46.3J 46.350 MHz (FL-448)	T	36.6/34.5
F13	2020002410	CER LTM450FW <JJE>		
F14	2020002570	CER LTM450HW <JJE>		
F15	2020002610	S.CER LTUCG450G <JJE>	T	65.2/43.3
X2	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz	T	42.2/15.0
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz		
X51	6050013160	S.XTA CR-912 TSS3225A 19.6608 MHz	T	81.9/21.2
X900	6050013170	S.XTA CR-914 TTS18VSE-A11 12.288 MHz	B	75.1/46.0
L1	6200012780	S.COI 0.30-1.4-6TL 27.2N <COMO>	B	9.4/7.9
L2	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	9.6/11.7
L3	6200012910	S.COI 0.35-1.6-8TL 45.5N <COMO>	B	11.2/15.6
L4	6200002861	S.COI NLV25T-4RTJ	B	18.4/17.8
L5	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	18.4/14.1
L6	6200012390	S.COI 0.30-0.92-3TR 5.8N <COMO>	B	22.0/14.1
L7	6200013010	S.COI 0.30-0.9-5TL 10.3N <COMO>	B	24.3/15.3
L8	6200013100	S.COI 0.45-1.5-STL 18.3N <COMO>	B	25.2/19.0
L9	6200007871	S.COI ELJRF 39NJFB	B	42.2/11.3
L11	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	14.1/19.6
L12	6200011021	S.COI ELJRF 82NJFB	B	12.4/22.8
L13	6200008090	S.COI LQW2BHN68NJ03L	B	14.4/26.8
L14	6200008090	S.COI LQW2BHN68NJ03L	B	21.1/26.8
L15	6200010910	S.COI LQW18AN56NG00D	B	27.1/27.8
L16	6200010910	S.COI LQW18AN56NG00D	B	33.3/27.5
L18	6200007901	S.COI ELJRF 22NJFB	B	32.8/13.4
L19	6200011011	S.COI ELJRF 68NJFB	B	34.4/23.9
L20	6200004770	S.COI ELJNC R56J-F	B	39.1/26.4
L23	6200012170	S.COI MLG1608S 1R1J-T	T	41.9/35.7
L24	6200012170	S.COI MLG1608S 1R1J-T	T	45.2/34.2
L31	6200011031	S.COI ELJRF R10JFB	T	56.6/17.7
L32	6200011031	S.COI ELJRF R10JFB	B	56.5/20.4
L33	6200011031	S.COI ELJRF R10JFB	T	62.5/17.7
L34	6190002030	S.COI MLG1608S 1R0J-T	B	59.9/28.5
L35	6200008090	S.COI LQW2BHN68NJ03L	T	55.7/27.7
L36	6200003640	S.COI MLF1608E 100K-T	T	53.0/25.6
L37	6200007720	S.COI LQW2BHN33NJ03L	T	53.8/22.6
L38	6190002030	S.COI MLG1608S 1R0J-T	B	50.6/25.7
L39	6190002030	S.COI MLG1608S 1R0J-T	B	60.8/27.0
L40	6200007760	S.COI LQW2BHN82NJ03L	T	62.9/27.9
L41	6200003640	S.COI MLF1608E 100K-T	T	64.6/27.5
L42	6200008090	S.COI LQW2BHN68NJ03L	T	64.3/20.6
L43	6190002030	S.COI MLG1608S 1R0J-T	B	60.0/22.7
L46	6200007881	S.COI ELJRF 33NJFB	B	48.8/20.1
L51	6200014170	S.COI VLF4028T-4R7N1R5-2	T	96.5/14.3
L900	6200014160	S.COI VLF4028T-100M1R0-2	T	77.6/42.9
L901	6200007830	S.COI ELJFC 4R7K-F	B	84.5/48.0
R1	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	9.1/5.7
R2	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/19.2
R3	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/18.3

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R7	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	34.0/5.7
R8	7030005220	S.RES ERJ2GEJ 223 X (22K)	T	31.1/5.7
R9	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	31.1/6.6
R10	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	33.0/11.5
R11	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	32.1/11.5
R12	7030005110	S.RES ERJ2GEJ 224 X (220K)	T	32.8/5.7
R13	7030005530	S.RES ERJ2GEJ 100 X (10)	T	34.8/9.9
R14	7030004980	S.RES ERJ2GEJ 101 X (100)	T	35.4/7.5
R15	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	36.3/7.5
R16	7030010040	S.RES ERJ2GEJ-JPW	T	29.4/7.1
R19	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	15.2/11.4
R20	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/12.3
R21	7030007250	S.RES ERJ2GEJ 220 X (22)	B	32.3/10.9
R22	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	31.0/9.2
R23	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	33.7/10.4
R24	7030005590	S.RES ERJ2GEJ 680 X (68)	B	38.4/10.9
R25	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	40.2/10.9
R26	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	38.4/9.2
R27	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	15.2/12.3
R28	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/13.2
R31	7030005530	S.RES ERJ2GEJ 100 X (10)	B	42.2/14.9
R32	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	44.0/14.9
R33	7030004980	S.RES ERJ2GEJ 101 X (100)	B	44.6/13.1
R35	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	46.4/14.0
R36	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.6/13.1
R37	7030004980	S.RES ERJ2GEJ 101 X (100)	B	49.6/14.0
R38	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.8/15.2
R41	7030005530	S.RES ERJ2GEJ 100 X (10)	T	53.0/17.7
R42	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	56.6/19.4
R44	7030005530	S.RES ERJ2GEJ 100 X (10)	B	56.5/21.3
R45	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	57.7/18.6
R47	7030004980	S.RES ERJ2GEJ 101 X (100)	T	63.4/17.7
R48	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	62.5/19.3
R51	7030008370	S.RES ERJ2GEJ 561 X (560)	B	56.5/22.9
R52	7030008370	S.RES ERJ2GEJ 561 X (560)	B	60.8/24.4
R53	7030008340	S.RES RR0510P-182-D (1.8K)	T	55.7/23.7
R54	7030011000	S.RES RR0510P-392-D (3.9K)	T	57.9/25.9
R55	7030008340	S.RES RR0510P-182-D (1.8K)	T	61.8/23.7
R56	7030011000	S.RES RR0510P-392-D (3.9K)	T	58.9/25.9
R57	7030009320	S.RES ERJ2GEJ 4R7 X (4.7)	T	60.7/25.9
R58	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.6/27.2
R59	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	62.6/25.6
R62	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	68.0/27.2
R65	7030005720	S.RES ERJ2GEJ 563 X (56K)	B	64.7/30.9
R66	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	64.7/30.0
R67	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	62.4/18.0
R68	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	63.1/30.9
R69	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	63.1/31.8
R70	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	63.6/28.8
R71	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.1/28.7
R72	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.1/27.9
R73	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	54.6/29.9
R74	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	52.8/29.9
R76	7030004990	S.RES ERJ2GEJ 221 X (220)	T	48.4/25.0
R77	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.9
R78	7030010040	S.RES ERJ2GEJ-JPW	T	46.7/23.8
R79	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.0
R80	7410001130	S.ARR EXB28V102JX	T	41.9/27.8
R81	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	46.4/22.0
R82	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	40.1/18.0
R83	7030004970	S.RES ERJ2GEJ 470 X (47)	T	43.8/19.3
R84	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	40.1/23.7
R87	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	61.5/30.0
R88	7510001730	S.THE ERTJOEP 473J	T	58.8/9.8
R89	7030010080	S.RES ERJ2RHD 1003X (100K)	B	58.3/12.6
R101	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	28.3/32.7
R102	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	29.2/32.7
R103	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	31.0/30.7
R104	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	17.4/26.0
R105	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	18.3/26.0
R106	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	22.9/26.9
R107	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	22.6/30.0
R108	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	22.9/28.7
R109	7030005530	S.RES ERJ2GEJ 100 X (10)	B	23.5/30.0
R110	7030008280	S.RES ERJ2GEJ 271 X (270)	B	23.5/25.6
R111	7030005110	S.RES ERJ2GEJ 224 X (220K)	B	24.4/30.0
R112	7030004970	S.RES ERJ2GEJ 470 X (47)	B	27.1/25.6
R113	7030008370	S.RES ERJ2GEJ 561 X (560)	B	29.2/27.5
	7030005000	S.RES ERJ2GEJ 471 X (470)	[#01]	
	7030005000	S.RES ERJ2GEJ 471 X (470)	[#05]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#06]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#11]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#12]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#15]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#16]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[#17]	
R114	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	30.1/25.6
R115	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	31.0/25.6
R116	7030005080	S.RES ERJ2GEJ 823 X (82K)	B	34.7/28.8
R117	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	33.4/23.9
R118	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	36.4/23.9
R119	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	36.3/27.9
R120	7030005590	S.RES ERJ2GEJ 680 X (68)	B	39.2/23.9
R121	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.0/26.3
R122	7030004970	S.RES ERJ2GEJ 470 X (47)	B	41.9/23.9
R123	7030010040	S.RES ERJ2GEJ-JPW	T	71.2/30.6
R126	7030004980	S.RES ERJ2GEJ 101 X (100)	B	39.5/40.8
R127	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	37.9/40.8
R128	7030007280	S.RES ERJ2GEJ 331 X (330)	B	39.1/44.4
R129	7030005000	S.RES ERJ2GEJ 471 X (470)	B	37.4/22.3
R130	7030005530	S.RES ERJ2GEJ 100 X (10)	B	36.4/22.3
R131	7030005000	S.RES ERJ2GEJ 471 X (470)	B	35.4/22.3
R132	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	47.4/17.6
R134	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	91.6/14.8
R135	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	43.1/37.7
R136	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	42.9/38.9

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R138	7030005000	S.RES ERJ2GEJ 471 X (470)	B	43.0/35.5
R139	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	48.3/35.5
R140	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	46.5/34.6
R141	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	46.5/33.7
R142	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	46.5/31.9
R146	7030004970	S.RES ERJ2GEJ 470 X (47)	B	45.6/44.0
R147	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	47.1/42.2
R148	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.9/33.7
R149	7030007060	S.RES ERJ2GEJ 684X (680K)	T	41.5/32.3
R151	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	51.7/39.0
R152	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	53.9/35.1
R153	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	55.5/38.7
R154	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	57.8/36.9
R155	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	58.8/39.8
R156	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	21.4/25.5
R157	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	31.0/23.9
R158	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	59.7/35.7
R161	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	62.4/42.8
R162	7030004980	S.RES ERJ2GEJ 101 X (100)	B	64.0/42.8
R163	7030004980	S.RES ERJ2GEJ 101 X (100)	B	69.7/46.4
R164	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	67.3/41.0
R165	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	65.7/44.6
R166	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	65.7/43.7
R167	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	65.7/42.8
R169	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	64.0/41.0
R171	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	36.6/27.4
R172	7030005530	S.RES ERJ2GEJ 100 X (10)	B	39.2/31.1
R173	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.5/32.3
R174	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	38.3/38.8
R175	7030008370	S.RES ERJ2GEJ 561 X (560)	B	35.1/38.8
R176	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	35.5/40.6
R177	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.1/40.7
R178	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	39.2/40.7
R181	7030007270	S.RES ERJ2GEJ 151 X (150)	T	35.5/29.6
R182	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	34.0/28.4
R183	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	37.8/41.1
R184	7030005530	S.RES ERJ2GEJ 100 X (10)	T	37.8/39.3
R185	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	68.8/32.4
R186	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	70.4/31.5
R187	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	67.6/36.3
R188	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	67.6/34.7
R189	7030004980	S.RES ERJ2GEJ 101 X (100)	T	68.9/36.8
R190	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	65.7/46.4
R243	7030005530	S.RES ERJ2GEJ 100 X (10)	B	82.1/21.9
R244	7030005160	S.RES ERJ2GEJ 105 X (1M)	B	83.0/21.9
R358	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/8.7
R359	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/10.5
R360	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	56.0/9.6
R361	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	24.8/41.7
R362	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	51.6/7.5
R363	7030005000	S.RES ERJ2GEJ 471 X (470)	B	58.3/8.6
R364	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	55.3/2.2
R365	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	26.2/38.9
R366	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	58.3/10.2
R367	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	53.6/2.2
R368	7030005700	S.RES ERJ2GEJ 274 X (270K)	T	58.3/12.5
R369	7030005100	S.RES ERJ2GEJ 154 X (150K)	T	63.5/10.6
R370	7030005170	S.RES ERJ2GEJ 474 X (470K)	T	68.0/14.1
R371	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.3/11.6
R372	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.3/10.7
R373	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	75.4/11.6
R388	7030011120	S.RES ERJ2RHD 2702X (27.0K)	T	73.9/20.9
R389	7030012510	S.RES ERJ2RHD 3901X (3.90K)	T	71.0/20.2
R390	7030012520	S.RES ERJ2RHD 8201X (8.20K)	T	71.4/21.5
R393	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	61.7/8.9
R394	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	59.9/7.3
R395	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	60.8/8.9
R396	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.8/7.3
R397	7030008310	S.RES ERJ2GEJ 564 X (560K)	B	59.7/5.7
R398	7030008310	S.RES ERJ2GEJ 564 X (560K)	B	61.7/7.3
R405	7030011290	S.RES ERJ12Y1R8U (1.8)	T	51.3/35.6
R406	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	12.6/45.7
R408	7030004980	S.RES ERJ2GEJ 101 X (100)	B	35.6/46.3
R412	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	15.9/39.5
R413	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	19.1/34.7
R414	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	20.7/34.1
R416	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	21.5/36.0
R417	7030007570	S.RES ERJ2GEJ 122 X (1.2K)	B	21.3/37.2
R418	7030009280	S.RES ERJ2GEJ 391 X	B	19.8/37.9
R420	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	89.8/25.2
R421	7210003610	VAR F081-0025A <SLVJ>		
R422	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	64.6/6.9
R423	7030012530	S.RES ERJ2RHD 3302X (33.0K)	T	6.2/36.5
R424	7030012540	S.RES ERJ2RHD 1502X (15.0K)	T	4.8/38.4
R426	7030009140	S.RES ERJ2GEJ 272 X (2.7K)	T	64.6/3.5
R427	7030007340	S.RES ERJ2GEJ 153 X (15K)	T	64.8/3.5
R428	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	64.8/5.5
R429	7030008310	S.RES ERJ2GEJ 564 X (560K)	T	66.4/5.5
R430	7030005160	S.RES ERJ2GEJ 105 X (1M)	T	63.2/4.5
R431	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	68.9/15.7
R432	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	68.9/17.3
R433	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	67.8/37.8
R434	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	68.7/37.8
R435	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	70.6/14.4
R436	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	72.2/13.9
R437	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	15.0/37.2
R439	7030005100	S.RES ERJ2GEJ 154 X (150K)	T	63.2/5.5
R440	7030009280	S.RES ERJ2GEJ 391 X	B	17.4/43.5
R441	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	19.1/33.8
R442	7030007280	S.RES ERJ2GEJ 331 X (330)	B	21.5/35.1
R444	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	90.4/12.8
R451	7030005060	S.RES ERJ2GEJ 333 X (33K)	T	24.6/30.5
R452	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/30.5
R453	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/29.6
R454	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	23.0/30.5

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R468	7030005010	S.RES ERJ2GEJ 681 X (680)	T	75.6/19.8
R469	7030008280	S.RES ERJ2GEJ 271 X (270)	T	77.5/20.4
R491	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	71.5/8.0
R492	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	T	72.0/3.7
R493	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	70.3/4.6
R494	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	70.3/5.5
R495	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	70.7/7.1
R496	7030005080	S.RES ERJ2GEJ 823 X (82K)	T	73.7/5.5
R497	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	66.4/13.0
R498	7030008290	S.RES ERJ2GEJ 183 X (18K)	T	71.6/14.5
R499	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	71.5/8.9
R500	7030007350	S.RES ERJ2GEJ 393 X (39K)	B	70.2/9.9
R502	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	69.3/9.9
R503	7030004980	S.RES ERJ2GEJ 101 X (100)	B	61.9/11.6
R504	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	67.3/13.0
R517	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	B	63.3/13.5
R518	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.1/14.8
R527	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	64.6/13.0
R610	7030005080	S.RES ERJ2GEJ 823 X (82K)	T	65.3/13.0
R611	7030010040	S.RES ERJ2GEJ-JPW	T	64.6/10.6
R612	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	64.6/8.6
R614	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	62.1/13.1
R615	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	69.6/6.2
R616	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	68.4/8.3
R618	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	67.4/3.9
R619	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	68.4/5.1
R620	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	92.7/10.0
R621	7030007340	S.RES ERJ2GEJ 153 X (15K)	T	93.6/10.0
R622	7030008290	S.RES ERJ2GEJ 183 X (18K)	T	92.7/8.0
R623	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	T	6.4/46.2
R624	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	90.4/11.2
R625	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	7.8/37.2
R626	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	6.2/37.2
R627	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/21.3
R628	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	88.2/17.0
R630	7030010040	S.RES ERJ2GEJ-JPW	B	63.3/14.9
R631	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	85.3/25.0
R632	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	82.9/23.1
R633	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	85.7/21.9
R634	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	82.7/11.4
R635	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.2/15.5
R636	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.0/14.3
R637	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	87.3/19.7
R638	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.4/16.1
R639	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.6/15.7
R640	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	74.8/12.9
R641	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/22.2
R646	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	92.0/23.0
R647	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.2/22.2
R651	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	86.8/13.5
R652	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	91.1/22.2
R653	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	84.8/21.9
R657	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	84.9/13.1
R661	7410001130	S.ARR EXB28V102JX	B	90.9/12.3
R662	7410001130	S.ARR EXB28V102JX	B	90.9/14.8
R663	7410001130	S.ARR EXB28V102JX	B	88.4/22.3
R664	7410001150	S.ARR EXB28V471JX	B	80.2/22.3
R665	7410001130	S.ARR EXB28V102JX	B	77.2/22.3
R666	7410001130	S.ARR EXB28V102JX	B	75.3/10.9
R667	7410001130	S.ARR EXB28V102JX	B	79.4/6.4
R668	7410001130	S.ARR EXB28V102JX	B	82.4/6.4
R669	7410001130	S.ARR EXB28V102JX	B	85.2/6.4
R683	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.7/19.7
R688	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	81.0/13.1
R691	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	83.1/12.7
R692	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	92.2/20.6
R693	7030007340	S.RES ERJ2GEJ 153 X (15K)	B	93.6/21.9
R694	7030012540	S.RES ERJ2RHD 1502X (15.0K)	B	91.9/20.5
R904	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	73.6/30.0
R905	7030007250	S.RES ERJ2GEJ 220 X (22)	T	75.2/33.2
R906	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	T	75.2/34.1
R907	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	76.1/30.2
R908	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	T	71.6/31.9
R909	7030004980	S.RES ERJ2GEJ 101 X (100)	B	76.1/29.3
R910	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	79.4/32.9

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R949	7410001140	S.ARR EXB28V104JX	B	93.9/33.0
R950	7410001140	S.ARR EXB28V104JX	B	88.4/33.0
R951	7410001140	S.ARR EXB28V104JX	T	84.8/29.3
R952	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.1/36.8
R953	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.8/37.7
R956	7030010040	S.RES ERJ2GEJ-JPW	B	96.3/32.9
R957	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	94.7/30.9
R958	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	85.7/42.4
R961	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	90.9/30.9
R962	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	89.5/28.4
R963	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	95.4/32.9
R964	7410001140	S.ARR EXB28V104JX	B	85.9/39.4
R965	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	79.2/29.3
R966	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	77.9/29.8
R968	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	88.9/18.3
R969	7030005160	S.RES ERJ2GEJ 105 X (1M)	T	88.2/19.7
R970	7030010040	S.RES ERJ2GEJ-JPW	B	71.4/38.1
R971	7030010040	S.RES ERJ2GEJ-JPW	B	75.3/38.0
R972	7030010040	S.RES ERJ2GEJ-JPW	B	74.0/38.6
C2	4030017620	S.CER C1005 CH 1H 100C-T	B	10.3/6.1
C3	4030017410	S.CER C1005 CH 1H 240J-T	B	7.4/12.0
C4	4030017570	S.CER C1005 CH 1H 040B-T	B	11.5/11.4
C5	4030017650	S.CER C1005 CH 1H 270J-T	B	12.4/11.4
C6	4030017550	S.CER C1005 CH 1H 1R5B-T	B	11.5/13.0
C7	4030017640	S.CER C1005 CH 1H 150J-T	B	12.4/13.0
C8	4030017460	S.CER C1005 JB 1H 102K-T	B	14.5/17.2
C11	4030017460	S.CER C1005 JB 1H 102K-T	B	20.6/20.1
C15	4030017400	S.CER C1005 CH 1H 220J-T	B	16.3/14.3
C16	4030017390	S.CER C1005 CH 1H 180J-T	B	17.9/11.3
C20	4030017460	S.CER C1005 JB 1H 102K-T	B	20.4/14.1
C21	4030007070	S.CER C1608 CH 1H 330J-T	[#01] [#05] [#06] [#11] [#12] [#15] [#16] [#17]	B 21.3/10.4
	4030008560	S.CER C1608 CH 1H 300J-T		
	4030008560	S.CER C1608 CH 1H 300J-T		
	4030007070	S.CER C1608 CH 1H 330J-T		
	4030007070	S.CER C1608 CH 1H 330J-T		
	4030007070	S.CER C1608 CH 1H 330J-T		
	4030007070	S.CER C1608 CH 1H 330J-T		
	4030007070	S.CER C1608 CH 1H 330J-T		
	4030007040	S.CER C1608 CH 1H 180J-T		
C22	4030007040	S.CER C1608 CH 1H 180J-T		
	4030007050	S.CER C1608 CH 1H 220J-T		
C23	4030007050	S.CER C1608 CH 1H 220J-T		
	4030008560	S.CER C1608 CH 1H 300J-T		
	4030008560	S.CER C1608 CH 1H 300J-T		
	4030007050	S.CER C1608 CH 1H 220J-T		
	4030007050	S.CER C1608 CH 1H 220J-T		
	4030007050	S.CER C1608 CH 1H 220J-T		
	4030007050	S.CER C1608 CH 1H 220J-T		
C24	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/11.4
C25	4030017460	S.CER C1005 JB 1H 102K-T	T	19.8/10.5
C26	4030017460	S.CER C1005 JB 1H 102K-T	T	29.4/5.7
C27	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/5.8
C28	4030017460	S.CER C1005 JB 1H 102K-T	T	33.9/11.5
C29	4030016930	S.CER C1005 JB 1A 104K-T	T	31.2/11.5
C30	4030018890	S.CER C1005 JB 0J 224K-T	T	32.8/6.6
C31	4030016930	S.CER C1005 JB 1A 104K-T	T	34.8/11.5
C32	4030017460	S.CER C1005 JB 1H 102K-T	T	35.7/9.9
C33	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/7.5
C34	4030018860	S.CER C1005 JB 0J 105K-T	T	38.1/7.5
C35	4030017420	S.CER C1005 CH 1H 470J-T	B	37.5/9.2
C36	4030017460	S.CER C1005 JB 1H 102K-T	B	39.3/9.2
C37	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/12.3
C38	4030017460	S.CER C1005 JB 1H 102K-T	T	17.9/12.7
C40	4030017420	S.CER C1005 CH 1H 470J-T	T	21.4/13.2
C41	4030017460	S.CER C1005 JB 1H 102K-T	B	28.0/17.6
C43	4030017490	S.CER C1608 JB 1A 105K-T	B	27.8/20.3
C44	4030017460	S.CER C1005 JB 1H 102K-T	T	32.7/16.6
C45	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/12.3
C46	4030017510	S.CER C1005 CH 1H 680J-T	B	32.8/12.4
C48	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/9.2
C49	4030017420	S.CER C1005 CH 1H 470J-T	B	31.9/9.2
C51	4030017460	S.CER C1005 JB 1H 102K-T	B	23.4/22.7
C52	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/14.4
C53	4030017460	S.CER C1005 JB 1H 102K-T	B	37.5/10.9
C54	4030016790	S.CER C1005 JB 1E 103K-T	B	39.3/10.9
C55	4030017490	S.CER C1608 JB 1A 105K-T	B	33.5/16.6
C56	4030017430	S.CER C1005 CH 1H 101J-T	B	39.9/13.1
C57	4030017460	S.CER C1005 JB 1H 102K-T	B	40.5/14.9
C58	4030017420	S.CER C1005 CH 1H 470J-T	B	44.6/11.3
C59	4030017460	S.CER C1005 JB 1H 102K-T	B	44.6/10.4
C60	4030017460	S.CER C1005 JB 1H 102K-T	B	44.6/12.2
C63	4030017650	S.CER C1005 CH 1H 270J-T	B	46.4/14.9
C64	4030016790	S.CER C1005 JB 1E 103K-T	B	49.6/12.1
C65	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/14.0
C71	4030017620	S.CER C1005 CH 1H 100C-T	B	51.8/16.6
C72	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/17.8
C73	4030017460	S.CER C1005 JB 1H 102K-T	T	53.0/19.4
C74	4030017590	S.CER C1005 CH 1H 070C-T	T	58.0/18.9
C75	4030017460	S.CER C1005 JB 1H 102K-T	T	54.1/20.4
C76	4030017460	S.CER C1005 JB 1H 102K-T	B	58.6/18.6
C77	4030017460	S.CER C1005 JB 1H 102K-T	T	64.3/17.7
C78	4030017460	S.CER C1005 JB 1H 102K-T	T	58.9/18.9
C79	4030016930	S.CER C1005 JB 1A 104K-T	B	64.3/21.2
C80	4030017460	S.CER C1005 JB 1H 102K-T	B	64.3/23.4
C81	4030017360	S.CER C1005 CH 1H 030B-T	T	58.5/17.3
C83	4030017540	S.CER C1005 CH 1H R75B-T	T	58.9/21.2
C85	4030017460	S.CER C1005 JB 1H 102K-T	T	57.1/21.2
C86	4030017660	S.CER C1005 CH 1H 330J-T	T	57.0/25.9
C87	4030017660	S.CER C1005 CH 1H 330J-T	T	58.0/21.2
C88	4030017660	S.CER C1005 CH 1H 330J-T	T	56.1/25.9
C89	4030017660	S.CER C1005 CH 1H 330J-T	T	57.9/27.5
C90	4030017460	S.CER C1005 JB 1H 102K-T	B	61.7/28.8
C93	4030017420	S.CER C1005 CH 1H 470J-T	T	53.2/28.5

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C94	4030017610	S.CER C1005 CH 1H 090C-T	T	53.2/27.5
C101	4030017530	S.CER C1005 CH 1H 0R5B-T	T	59.8/21.2
C102	4030016930	S.CER C1005 JB 1A 104K-T	T	56.2/21.8
C103	4030017460	S.CER C1005 JB 1H 102K-T	T	61.8/21.8
C104	4030017390	S.CER C1005 CH 1H 180J-T	T	59.8/25.9
C105	4030017660	S.CER C1005 CH 1H 330J-T	T	60.7/21.2
C106	4030017510	S.CER C1005 CH 1H 680J-T	T	61.6/25.9
C107	4030017660	S.CER C1005 CH 1H 330J-T	T	61.1/27.1
C108	4030017460	S.CER C1005 JB 1H 102K-T	B	60.8/25.6
C109	4550008090	S.TAN TCTU0J105K8R	B	65.6/28.8
C111	4030017340	S.CER C1005 CH 1H 010B-T	T	61.1/29.2
C112	4030017440	S.CER C1005 CH 1H 221J-T	T	62.7/25.3
C113	4030017360	S.CER C1005 CH 1H 030B-T	T	64.7/23.5
C114	4030017360	S.CER C1005 CH 1H 030B-T	T	63.8/23.1
C115	4030017610	S.CER C1005 CH 1H 090C-T	T	64.7/25.3
C116	4030018860	S.CER C1005 JB 0J 105K-T	B	63.1/30.0
C117	4030018820	S.CER C1005 JB 1H 561K-T	B	61.5/30.9
C118	4030017420	S.CER C1005 CH 1H 470J-T	B	66.3/30.0
C119	4030016930	S.CER C1005 JB 1A 104K-T	B	64.1/24.9
C120	4030017460	S.CER C1005 JB 1H 102K-T	B	64.7/31.8
C121	4030019560	S.CER GRM21BB31C106KE15L	B	61.1/19.7
C122	4030016790	S.CER C1005 JB 1E 103K-T	B	65.0/16.4
C123	4030017460	S.CER C1005 JB 1H 102K-T	B	47.0/29.0
C124	4030017460	S.CER C1005 JB 1H 102K-T	B	53.7/29.9
C130	4030017420	S.CER C1005 CH 1H 470J-T	B	59.9/21.6
C132	4550000560	S.TAN TEESVA 1V 334M8R	T	48.3/21.4
Eqv.	4550007550	S.TAN F931V334MAABMA		
C134	4550003250	S.TAN TEESVA 1V 474M8R	T	46.7/29.8
Eqv.	4550007590	S.TAN F931V474MAABMA		
C141	4030017620	S.CER C1005 CH 1H 100C-T	B	51.4/19.5
C144	4030017430	S.CER C1005 CH 1H 101J-T	T	43.3/20.2
C145	4030018890	S.CER C1005 JB 0J 224K-T	T	42.4/20.5
C146	4030018890	S.CER C1005 JB 0J 224K-T	T	41.5/20.5
C147	4030017460	S.CER C1005 JB 1H 102K-T	T	46.4/21.1
C148	4030019560	S.CER GRM21BB31C106KE15L	B	44.0/26.2
C149	4030017430	S.CER C1005 CH 1H 101J-T	T	44.2/20.5
C150	4030016790	S.CER C1005 JB 1E 103K-T	T	43.9/28.1
C151	4030017430	S.CER C1005 CH 1H 101J-T	T	43.9/27.2
C152	4030017460	S.CER C1005 JB 1H 102K-T	T	43.9/29.0
C153	4030017420	S.CER C1005 CH 1H 470J-T	T	43.1/30.4
C154	4030017420	S.CER C1005 CH 1H 470J-T	T	42.2/30.4
C155	4030017420	S.CER C1005 CH 1H 470J-T	T	41.3/30.4
C156	4030016930	S.CER C1005 JB 1A 104K-T	T	40.4/30.4
C157	4030017460	S.CER C1005 JB 1H 102K-T	T	41.0/18.8
C158	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/18.8
C159	4030016930	S.CER C1005 JB 1A 104K-T	T	40.1/10.9
C160	4030017460	S.CER C1005 JB 1H 102K-T	T	41.9/10.9
C167	4030017630	S.CER C1005 CH 1H 120J-T	B	49.2/22.2
C168	4030017630	S.CER C1005 CH 1H 120J-T	B	48.3/22.2
C169	4030017620	S.CER C1005 CH 1H 100C-T	B	48.8/21.0
C171	4030018120	S.CER C1005 CH 1H 110J-T	B	16.2/18.5
C172	4030017640	S.CER C1005 CH 1H 150J-T	B	13.9/22.1
C173	4030017460	S.CER C1005 JB 1H 102K-T	B	13.4/24.4
C174	4030017580	S.CER C1005 CH 1H 060C-T	B	12.4/24.4
C175	4030017580	S.CER C1005 CH 1H 060C-T	B	12.9/26.5
C176	4030017430	S.CER C1005 CH 1H 101J-T	B	16.2/26.6
C178	4030017550	S.CER C1005 CH 1H 1R5B-T	B	18.0/29.2
C179	4030017370	S.CER C1005 CH 1H 3R5B-T	B	19.6/27.8
C180	4030017430	S.CER C1005 CH 1H 101J-T	B	19.2/26.0
C181	4030017370	S.CER C1005 CH 1H 3R5B-T	B	22.9/27.8
C182	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/24.6
C183	4030017460	S.CER C1005 JB 1H 102K-T	B	16.2/25.7
C184	4030016930	S.CER C1005 JB 1A 104K-T	T	20.9/26.7
C186	4030016930	S.CER C1005 JB 1A 104K-T	B	21.7/30.0
C188	4030016930	S.CER C1005 JB 1A 104K-T	B	25.3/30.0
C189	4030017460	S.CER C1005 JB 1H 102K-T	B	27.1/23.9
C191	4030016790	S.CER C1005 JB 1E 103K-T	B	28.7/28.7
C192	4030017460	S.CER C1005 JB 1H 102K-T	B	26.2/25.6
C193	4030017460	S.CER C1005 JB 1H 102K-T	B	25.3/25.6
C195	4030017570	S.CER C1005 CH 1H 040B-T	B	28.2/27.5
C196	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/25.6
C197	4030017550	S.CER C1005 CH 1H 1R5B-T	[#01] [#05] [#06] [#11] [#12] [#15] [#16] [#17]	B 31.0/29.8
	4030017350	S.CER C1005 CH 1H 020B-T		
	4030017350	S.CER C1005 CH 1H 020B-T		
	4030017550	S.CER C1005 CH 1H 1R5B-T		
	4030017550	S.CER C1005 CH 1H 1R5B-T		
	4030017550	S.CER C1005 CH 1H 1R5B-T		
	4030017550	S.CER C1005 CH 1H 1R5B-T		
C198	4030017460	S.CER C1005 JB 1H 102K-T	B	32.3/25.8
C199	4030017380	S.CER C1005 CH 1H 050B-T	B	34.4/26.6
C200	4030017580	S.CER C1005 CH 1H 060C-T	B	34.7/27.9
C201	4030017460	S.CER C1005 JB 1H 102K-T	T	31.8/23.6
C202	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/23.9
C203	4030016930	S.CER C1005 JB 1A 104K-T	B	30.1/23.9
C206	4030017620	S.CER C1005 CH 1H 100C-T	B	47.4/16.6
C210	4030017630	S.CER C1005 CH 1H 120J-T	B	35.4/23.9
C211	4030017460	S.CER C1005 JB 1H 102K-T	B	34.4/22.3
C214	4030017460	S.CER C1005 JB 1H 102K-T	B	37.4/23.9
C215	4030017390	S.CER C1005 CH 1H 180J-T	B	41.9/26.3
C216	4030017460	S.CER C1005 JB 1H 102K-T	B	41.0/23.9
C217	4030016790	S.CER C1005 JB 1E 103K-T	B	40.1/23.9
C218	4030016790	S.CER C1005 JB 1E 103K-T	B	37.5/28.5
C223	4030017460	S.CER C1005 JB 1H 102K-T	B	41.9/22.3
C224	4030017460	S.CER C1005 JB 1H 102K-T	B	45.7/17.6
C225	4030017460	S.CER C1005 JB 1H 102K-T	T	39.5/38.8
C226	4030016790	S.CER C1005 JB 1E 103K-T	B	37.3/44.4
C227	4030016790	S.CER C1005 JB 1E 103K-T	B	36.3/40.8
C231	4030017430	S.CER C1005 CH 1H 101J-T	B	40.6/42.6
C232	4030017660	S.CER C1005 CH 1H 330J-T	T	42.0/38.9
C233	4030017460	S.CER C1005 JB 1H 102K-T	B	41.1/39.0
C235	4030019560	S.CER GRM21BB31C106KE15L	B	44.5/42.6
C236	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/43.1
C238	4030017460	S.CER C1005 JB 1H 102K-T	B	41.1/40.1
C239	4030017720	S.CER C1005 JB 1H 331K-T	T	43.1/40.1

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C240	4030017460	S.CER C1005 JB 1H 102K-T	B	44.7/35.5
C241	4030017420	S.CER C1005 CH 1H 470J-T	B	46.5/32.8
C242	4030017710	S.CER C1005 CH 1H 181J-T	B	48.3/34.6
C243	4030017710	S.CER C1005 CH 1H 181J-T	B	46.5/35.5
C244	4030016930	S.CER C1005 JB 1A 104K-T	B	50.2/37.0
C246	4030019460	S.CER C1608 JB 0J 106M-T	T	68.8/30.7
C247	4030018140	S.CER C1005 JB 1H 391K-T	T	70.4/32.4
C248	4030016930	S.CER C1005 JB 1A 104K-T	T	68.9/37.7
C251	4030017360	S.CER C1005 CH 1H 030B-T	T	44.1/36.8
C252	4030017500	S.CER C1005 CH 1H 560J-T	T	42.5/36.8
C253	4030017580	S.CER C1005 CH 1H 060C-T	T	44.1/35.9
C254	4030017500	S.CER C1005 CH 1H 560J-T	T	42.6/34.6
C255	4030016790	S.CER C1005 JB 1E 103K-T	T	45.1/32.1
C256	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/23.7
C257	4030016790	S.CER C1005 JB 1E 103K-T	T	40.9/34.6
C261	4030016790	S.CER C1005 JB 1E 103K-T	B	50.5/38.6
C262	4030016790	S.CER C1005 JB 1E 103K-T	B	50.2/40.7
C263	4030016790	S.CER C1005 JB 1E 103K-T	B	57.1/41.5
C264	4030016790	S.CER C1005 JB 1E 103K-T	B	53.9/36.0
C265	4030016790	S.CER C1005 JB 1E 103K-T	B	58.7/36.9
C266	4030016930	S.CER C1005 JB 1A 104K-T	B	56.3/37.5
C267	4030016930	S.CER C1005 JB 1A 104K-T	B	58.1/35.7
C271	4030016930	S.CER C1005 JB 1A 104K-T	B	61.5/43.8
C272	4030016930	S.CER C1005 JB 1A 104K-T	B	62.4/41.9
C273	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/45.5
C274	4030016930	S.CER C1005 JB 1A 104K-T	B	68.9/42.0
C275	4030017040	S.CER C1005 JB 1A 333K-T	B	68.1/46.4
C276	4030017650	S.CER C1005 CH 1H 270J-T	B	67.3/42.0
C277	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/41.0
C282	4030016790	S.CER C1005 JB 1E 103K-T	B	40.8/31.1
C283	4030017590	S.CER C1005 CH 1H 070C-T	B	39.0/35.3
C284	4030016790	S.CER C1005 JB 1E 103K-T	B	36.7/38.8
C286	4030016790	S.CER C1005 JB 1E 103K-T	T	34.9/28.4
C287	4030017570	S.CER C1005 CH 1H 040B-T	T	37.1/29.6
C288	4030017600	S.CER C1005 CH 1H 080C-T	T	39.9/32.3
C290	4030016790	S.CER C1005 JB 1E 103K-T	T	37.8/40.2
C291	4030016930	S.CER C1005 JB 1A 104K-T	B	42.4/32.3
C292	4030016930	S.CER C1005 JB 1A 104K-T	T	38.3/44.1
C293	4030017460	S.CER C1005 JB 1H 102K-T	T	40.1/42.4
C311	4030018860	S.CER C1005 JB 0J 105K-T	T	24.6/31.4
C312	4030017710	S.CER C1005 CH 1H 181J-T	T	23.0/31.4
C313	4030016930	S.CER C1005 JB 1A 104K-T	T	21.2/28.0
C318	4030016790	S.CER C1005 JB 1E 103K-T	B	73.5/21.0
C319	4030016930	S.CER C1005 JB 1A 104K-T	B	75.4/23.9
C322	4030018860	S.CER C1005 JB 0J 105K-T	B	71.5/6.2
C323	4030016930	S.CER C1005 JB 1A 104K-T	B	68.4/9.9
C324	4030017740	S.CER C1005 JB 1H 821K-T	B	68.4/6.7
C325	4030016790	S.CER C1005 JB 1E 103K-T	T	80.2/9.6
C327	4030017900	S.CER C1005 JB 1E 123K-T	B	60.9/14.3
C328	4030020010	S.CER C1005 CH 1H 271J-T	B	63.3/12.6
C334	4030017460	S.CER C1005 JB 1H 102K-T	B	15.0/46.6
C335	4030017460	S.CER C1005 JB 1H 102K-T	B	24.6/38.2
C336	4030018860	S.CER C1005 JB 0J 105K-T	B	57.3/8.6
C337	4030017460	S.CER C1005 JB 1H 102K-T	B	52.5/7.5
C338	4030017460	S.CER C1005 JB 1H 102K-T	B	50.7/7.5
C339	4030017460	S.CER C1005 JB 1H 102K-T	B	53.4/7.5
C340	4030016930	S.CER C1005 JB 1A 104K-T	B	57.3/10.2
C342	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/6.6
C343	4030019560	S.CER GRM21BB31C106KE15L	B	57.6/6.9
C344	4030016930	S.CER C1005 JB 1A 104K-T	B	55.1/2.2
C361	4030016930	S.CER C1005 JB 1A 104K-T	B	69.0/14.4
C364	4030017630	S.CER C1005 CH 1H 120J-T	B	64.5/3.9
C376	4030017460	S.CER C1005 JB 1H 102K-T	T	73.0/20.9
C377	4550007320	S.TAN F930J226MAABMA	T	72.6/17.6
C378	4030017460	S.CER C1005 JB 1H 102K-T	T	73.0/22.5
C380	4030017510	S.CER C1005 CH 1H 680J-T	T	68.0/15.0
C381	4030016930	S.CER C1005 JB 1A 104K-T	T	68.0/4.5
C382	4030016930	S.CER C1005 JB 1A 104K-T	T	66.4/4.5
C383	4030018860	S.CER C1005 JB 0J 105K-T	T	64.8/4.5
C384	4030018860	S.CER C1005 JB 0J 105K-T	T	63.2/7.0
C385	4030016930	S.CER C1005 JB 1A 104K-T	T	62.3/3.5
C386	4030016930	S.CER C1005 JB 1A 104K-T	T	64.4/12.2
C388	4030017460	S.CER C1005 JB 1H 102K-T	B	20.9/3.5
C389	4030017460	S.CER C1005 JB 1H 102K-T	B	49.3/2.5
C390	4030017460	S.CER C1005 JB 1H 102K-T	B	53.3/2.6
C391	4030017420	S.CER C1005 CH 1H 470J-T	B	37.3/46.3
C392	4030017420	S.CER C1005 CH 1H 470J-T	B	29.1/43.9
C393	4520000020	S.NIO NOJC227M006RWJV	B	19.8/40.5
C394	4030017460	S.CER C1005 JB 1H 102K-T	B	28.2/43.9
C395	4520000020	S.NIO NOJC227M006RWJV	T	21.2/37.1
C396	4030017460	S.CER C1005 JB 1H 102K-T	T	27.1/47.4
C397	4030017460	S.CER C1005 JB 1H 102K-T	T	25.2/37.4
C398	4030017460	S.CER C1005 JB 1H 102K-T	B	12.2/32.0
C399	4030016930	S.CER C1005 JB 1A 104K-T	B	22.2/37.2
Eqv.	4550006250	S.TAN TEESVA 1A 106M8R	T	12.9/40.8
Eqv.	4550007520	S.TAN F931A106MAABMA		
C401	4030016930	S.CER C1005 JB 1A 104K-T	B	12.2/37.6
C403	4030018890	S.CER C1005 JB 0J 224K-T	B	15.0/39.5
C404	4030016930	S.CER C1005 JB 1A 104K-T	B	12.2/38.5
C405	4030018860	S.CER C1005 JB 0J 105K-T	B	19.3/33.7
C406	4030017460	S.CER C1005 JB 1H 102K-T	T	20.7/34.7
C408	4030016930	S.CER C1005 JB 1A 104K-T	T	4.8/37.5
C412	4030017460	S.CER C1005 JB 1H 102K-T	T	6.5/42.8
C413	4030017460	S.CER C1005 JB 1H 102K-T	B	7.7/31.9
C423	4030016790	S.CER C1005 JB 1E 103K-T	B	67.2/18.4
C426	4030016790	S.CER C1005 JB 1E 103K-T	B	67.8/39.4
C427	4030016930	S.CER C1005 JB 1A 104K-T	T	73.7/15.3
C428	4030017460	S.CER C1005 JB 1H 102K-T	T	16.4/32.2
C429	4030016790	S.CER C1005 JB 1E 103K-T	B	72.2/14.8
C430	4030016930	S.CER C1005 JB 1A 104K-T	T	63.4/9.0
C431	4510009870	S.ELE 10 CE 100 LD	T	14.7/27.2
C432	4030017460	S.CER C1005 JB 1H 102K-T	T	92.7/6.4
C433	4030017460	S.CER C1005 JB 1H 102K-T	T	17.3/32.2
C434	4030016790	S.CER C1005 JB 1E 103K-T	T	14.3/32.7
C435	4550007320	S.TAN F930J226MAABMA	T	19.4/30.8

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C437	4030017460	S.CER C1005 JB 1H 102K-T	T	14.3/31.8
C448	4030019490	S.CER C2012 JB 1A 106K-T	B	28.3/46.0
C451	4030016930	S.CER C1005 JB 1A 104K-T	B	86.6/21.9
C452	4030016930	S.CER C1005 JB 1A 104K-T	B	86.6/24.5
C453	4030017640	S.CER C1005 CH 1H 150J-T	T	83.9/22.5
C454	4030017580	S.CER C1005 CH 1H 060C-T	T	85.2/21.3
C455	4030017640	S.CER C1005 CH 1H 150J-T	B	83.9/21.9
C456	4030016930	S.CER C1005 JB 1A 104K-T	T	82.7/10.5
C457	4030017030	S.CER C1005 JB 1A 273K-T	T	86.0/9.3
C458	4030018900	S.CER C1005 JB 0J 474K-T	T	84.2/19.8
C461	4030019990	S.CER C1005 JB 1C 104K-T	B	96.9/12.4
C462	4030020190	S.CER GRM32EB31C476KE15L	B	96.3/9.1
C463	4030019990	S.CER C1005 JB 1C 104K-T	T	93.6/8.0
C464	4030020190	S.CER GRM32EB31C476KE15L	T	90.7/7.0
C465	4050000240	S.FEE NFM18PC104R1C3D	T	88.5/9.0
C466	4030018860	S.CER C1005 JB 0J 105K-T	T	88.6/10.7
C467	4030018860	S.CER C1005 JB 0J 105K-T	T	89.5/12.8
C468	4030020190	S.CER GRM32EB31C476KE15L	B	92.4/8.0
C482	4030017920	S.CER C1005 JB 1A 683K-T	[#01] [#05] [#06] [#11] [#12] [#15] [#16] [#17]	72.0/4.6
	4030018390	S.CER C1005 JB 1A 563K-T		
	4030018390	S.CER C1005 JB 1A 563K-T		
	4030017920	S.CER C1005 JB 1A 683K-T		
	4030017920	S.CER C1005 JB 1A 683K-T		
	4030017920	S.CER C1005 JB 1A 683K-T		
	4030017920	S.CER C1005 JB 1A 683K-T		
C483	4030018860	S.CER C1005 JB 0J 105K-T	T	70.3/3.7
C484	4030018860	S.CER C1005 JB 0J 105K-T	T	72.0/5.5
C485	4030018860	S.CER C1005 JB 0J 105K-T	B	72.3/7.1
C486	4030016930	S.CER C1005 JB 1A 104K-T	T	70.7/14.5
C487	4030018860	S.CER C1005 JB 0J 105K-T	T	72.5/14.5
C488	4030018860	S.CER C1005 JB 0J 105K-T	T	73.7/14.4
C489	4030018860	S.CER C1005 JB 0J 105K-T	B	65.5/13.0
C490	4030017920	S.CER C1005 JB 1A 683K-T	T	73.7/3.7
C491	4030016790	S.CER C1005 JB 1E 103K-T	T	73.7/4.6
C492	4030017430	S.CER C1005 CH 1H 101J-T	B	70.2/8.3
C493	4030018100	S.CER C1005 JB 1H 681K-T	B	72.2/9.8
C494	4030016790	S.CER C1005 JB 1E 103K-T	B	69.3/8.3
C501	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/16.1
C502	4030016930	S.CER C1005 JB 1A 104K-T	B	75.5/17.9
C503	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/15.2
C504	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/17.0
C505	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/14.3
C506	4030016930	S.CER C1005 JB 1A 104K-T	B	75.6/19.3
C507	4030018860	S.CER C1005 JB 0J 105K-T	T	83.3/8.9
C508	4030017460	S.CER C1005 JB 1H 102K-T	T	84.2/8.9
C509	4030018860	S.CER C1005 JB 0J 105K-T	T	90.2/18.6
C510	4030017460	S.CER C1005 JB 1H 102K-T	T	88.6/11.6
C511	4030018860	S.CER C1005 JB 0J 105K-T	T	91.4/21.7
C512	4030018860	S.CER C1005 JB 0J 105K-T	B	75.7/12.9
C513	4030016930	S.CER C1005 JB 1A 104K-T	T	86.4/19.7
C514	4030018860	S.CER C1005 JB 0J 105K-T	T	76.7/18.6
C515	4030017460	S.CER C1005 JB 1H 102K-T	T	91.4/22.6
C900	4030016930	S.CER C1005 JB 1A 104K-T	T	75.5/35.6
C901	4030018910	S.CER C1608 JB 0J 475K-T	T	76.0/36.7
C903	4050000240	S.FEE NFM18PC104R1C3D	B	72.3/39.3
C904	4050000240	S.FEE NFM18PC104R1C3D	B	73.1/41.2
C905	4050000240	S.FEE NFM18PC104R1C3D	B	72.3/36.9
C907	4030017460	S.CER C1005 JB 1H 102K-T	T	75.2/32.3
C908	4030018910	S.CER C1608 JB 0J 475K-T	T	77.5/34.1
C909	4030016930	S.CER C1005 JB 1A 104K-T	T	78.1/35.5
C910	4030016930	S.CER C1005 JB 1A 104K-T	B	75.9/40.9
C911	4550007730	S.TAN TEESVJ 0J 106M8R	B	74.8/41.1
Eqv.	4550008380	S.TAN TMCJ0J106MTRF		
C912	4030018910	S.CER C1608 JB 0J 475K-T	T	78.8/39.4
C913	4030016930	S.CER C1005 JB 1A 104K-T	T	80.0/40.0
C915	4030016930	S.CER C1005 JB 1A 104K-T	B	70.6/35.9
C916	4550007730	S.TAN TEESVJ 0J 106M8R	B	71.8/33.7
Eqv.	4550008380	S.TAN TMCJ0J106MTRF		
C917	4030016930	S.CER C1005 JB 1A 104K-T	B	70.6/35.0
C918	4030016790	S.CER C1005 JB 1E 103K-T	B	71.2/41.4
C919	4030018860	S.CER C1005 JB 0J 105K-T	T	81.1/44.5

[MAIN UNIT] (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C954	4030016790	S.CER C1005 JB 1E 103K-T	B	82.3/48.6
C955	4030016930	S.CER C1005 JB 1A 104K-T	B	78.3/43.8
C956	4030017380	S.CER C1005 CH 1H 050B-T	B	79.9/42.9
C957	4030016930	S.CER C1005 JB 1A 104K-T	B	78.6/42.5
C958	4030016930	S.CER C1005 JB 1A 104K-T	T	68.9/38.6
C959	4030017620	S.CER C1005 CH 1H 100C-T	B	78.3/41.3
J51	6450000131	CON HSJ1102-018540		
J52	6450002250	CON HSJ1456-010320		
J53	6510021901	S.CON BM02B-ASRS-TF(LF)(SN)	T	27.2/34.5
F51	5210001160	S.FUS ERBRE3R00V	T	10.7/37.6
DS51	5040003520	S.LED LNJ115W8PRA	T	2.0/37.9
MC51	7700002950	MIC EM9745P-33-G <HOR>		
S51	2260001900	SWI SW-149 (SKHLLD)		
S52	2260002800	S.SWI SW-167 (SKQTLAE010)	B	39.2/1.9
S53	2260002800	S.SWI SW-167 (SKQTLAE010)	B	48.7/1.9
S54	2250000830	ENC FSR08-0008A <SLVJ>		
EP2	6910018460	S.BEA MMZ1005Y102C-T	B	32.8/15.5
EP3	6910018460	S.BEA MMZ1005Y102C-T	B	63.4/21.2
EP4	6910018460	S.BEA MMZ1005Y102C-T	T	45.1/28.7
EP5	6910018460	S.BEA MMZ1005Y102C-T	T	41.0/10.9
EP6	6910014730	S.BEA MPZ2012S331A-T	B	25.2/21.4
EP7	6910021240	S.BEA MMZ1005A152ET	B	61.7/25.6
EP8	6910021240	S.BEA MMZ1005A152ET	B	62.6/28.8
EP51	6910018460	S.BEA MMZ1005Y102C-T	B	19.1/46.2
EP52	6910021240	S.BEA MMZ1005A152ET	B	95.9/13.0
EP53	6910021240	S.BEA MMZ1005A152ET	B	95.9/15.6
EP900	6910016330	S.BEA MMZ1005S 601CT-S	B	71.2/42.3
EP902	6910016330	S.BEA MMZ1005S 601CT-S	B	70.1/33.7
EP903	6910016330	S.BEA MMZ1005S 601CT-S	T	83.2/49.7
EP904	6910016330	S.BEA MMZ1005S 601CT-S	T	94.4/47.0
EP905	6910016330	S.BEA MMZ1005S 601CT-S	B	84.5/49.8
EP906	6910016330	S.BEA MMZ1005S 601CT-S	B	93.2/46.9

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110002751	S.IC TA75S01F (TE85RF)	T	32.5/8.9
IC2	1110007920	S.IC SC-1445-E2	B	72.5/29.4
IC3	1110007320	S.IC NJM2591V-TE1-#ZZZB	B	45.8/38.9
IC4	1130015271	S.IC AK1541P4-L	T	43.2/24.0
IC5	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	68.3/44.2
IC6	1130011741	S.IC TC7W66FK (TE85LF)	B	64.3/32.1
IC51	1140015010	S.IC HD64F2506RBR26DV (EMPTY)	B	83.0/14.3
IC52	1130015080	S.IC R1EX24512ASAS0A	T	83.7/16.4
IC53	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	T	85.0/11.3
IC54	1180003600	S.REG NJM2871BF05-TE1-#ZZZB	T	15.5/34.9
IC55	1110007610	S.IC TPA0211DGNR	B	13.3/42.1
IC58	1110002751	S.IC TA75S01F (TE85RF)	T	23.9/28.3
IC65	1180003670	S.REG BD9141MUV-E2	T	96.5/9.1
IC900	1180003680	S.REG TPS62204DBVR	T	76.4/39.0
IC901	1190002900	S.IC ADS7886SDCKR	T	77.6/32.4
IC903	1140013290	S.IC TMS320VC5509AZHH <FE>	T	86.8/36.8
IC904	1130015620	S.IC EN25Q40-100GIP <MSK>	T	78.1/28.4
IC905	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	80.2/46.0
Q1	1560001700	S.FET RD07MUS2B-T112	B	28.6/13.5
Q2	1560001241	S.FET RD01MUS1-T113	B	36.3/14.4
Q3	1530003311	S.TRA 2SC5107-O (TE85RF)	B	42.2/13.1
Q5	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	67.7/37.6
Q6	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	35.6/5.7
Q8	1530003311	S.TRA 2SC5107-O (TE85RF)	T	54.8/18.5
Q9	1530003311	S.TRA 2SC5107-O (TE85RF)	B	52.7/19.9
Q10	1530003311	S.TRA 2SC5107-O (TE85RF)	T	60.7/18.5
Q11	1590004070	S.TRA LDTC144EET1G <SLVJ>	B	53.4/23.2
Q12	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	62.7/23.3
Q13	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	57.5/23.6
Q14	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	60.0/23.6
Q15	1530002851	S.TRA 2SC4116-BL (TE85RF)	B	64.3/18.6
Q16	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	66.6/33.2
Q17	1560000541	S.FET 2SK880-Y (T5R1COMF)	B	48.2/31.0
Q21	1560000841	S.FET 2SK1829 (TE85RF)	B	28.4/30.5
Q22	1580000731	S.FET 3SK293 (TE85LF)	B	25.1/27.8
Q23	1580000731	S.FET 3SK293 (TE85LF)	B	36.4/26.1
Q24	1530003311	S.TRA 2SC5107-O (TE85RF)	B	38.3/42.6
Q26	1530002851	S.TRA 2SC4116-BL (TE85RF)	T	43.3/32.7
Q27	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	56.3/35.9
Q28	1530002851	S.TRA 2SC4116-BL (TE85RF)	B	63.6/44.7
Q29	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	38.5/42.6
Q51	1510001090	S.TRA KTA2015Y-RTK/P	B	25.7/43.5
Q52	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	24.6/39.8
Q58	1590004220	S.TRA DRA9123Y0L	B	54.9/7.1
Q59	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	49.1/7.3
Q63	1520000460	S.TRA 2SB1132 T100 R	B	15.3/35.5
Eqv.	1520000910	S.TRA 2SB1132L-R-AB3-R <SLVJ>		
Q64	1590004590	S.TRA DMC506010R	B	19.3/36.0
Q71	1510001090	S.TRA KTA2015Y-RTK/P	B	64.3/15.7
Q72	1510000771	S.TRA 2SA1586-GR (TE85LF)	B	63.5/37.5
Q73	1510001090	S.TRA KTA2015Y-RTK/P	B	64.3/12.8
Q81	1590004100	S.TRA LDTC144TET1G <SLVJ>	B	93.4/20.2
Q82	1590004050	S.TRA LDTC144EET1G <SLVJ>	T	79.1/19.5
Q83	1590004050	S.TRA LDTC144EET1G <SLVJ>	T	78.5/17.5
Q84	1590004070	S.TRA LDTC144EET1G <SLVJ>	B	19.2/43.8
Q85	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	21.5/33.0
Q86	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	68.9/10.7
Q87	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	67.7/39.7
Q88	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	66.9/10.7
Q90	1510000920	S.TRA 2SA1577 T106 Q	T	91.0/12.7
Q91	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	90.0/14.8
Q92	1590003321	S.FET TPC6103 (TE85LF)	B	6.9/35.0
Q93	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	4.0/34.6
Q96	1590004090	S.TRA LDTC114YET1G <SLVJ>	T	92.0/14.8
Q97	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	87.8/25.1
Q900	1590004050	S.TRA LDTC144EET1G <SLVJ>	B	73.5/48.8
Q901	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	71.5/19.3
Q902	1590004090	S.TRA LDTC114YET1G <SLVJ>	B	89.6/41.2
D1	1750001910	S.DIO HVD144AKRF-E	B	16.2/16.3
D5	1750001890	S.DIO HVD142AKRF-E	B	49.6/15.2
D6	1750001890	S.DIO HVD142AKRF-E	B	49.6/16.6
D7	1750001820	S.DIO LRB706F-40T1G <SLVJ>	T	17.9/10.5
D8	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	14.5/14.2
D10	1750002170	S.DIO DB2S31400L	B	61.5/18.7
D11	1750001880	S.VAR HVL375CKRF-E	T	57.4/29.2
D12	1750001550	S.VAR HVD376BKRF-E	T	54.1/25.6
D13	1750001550	S.VAR HVD376BKRF-E	T	55.1/25.6
D14	1750001880	S.VAR HVL375CKRF-E	T	59.3/27.1
D15	1750001570	S.VAR HVL355CMKRF-E	T	59.3/29.2
D16	1750001550	S.VAR HVD376BKRF-E	T	63.7/25.1
D17	1750001550	S.VAR HVD376BKRF-E	T	62.8/23.2
D21	1750001810	S.DIO L1SS400T1G <SLVJ>	B	30.3/32.4
D22	1750001910	S.DIO HVD144AKRF-E	B	16.2/20.5
D23	1750001910	S.DIO HVD144AKRF-E	B	14.1/23.1
D24	1750001880	S.VAR HVL375CKRF-E	B	17.4/27.8
D26	1750001880	S.VAR HVL375CKRF-E	B	18.6/27.8
D28	1750001780	S.VAR HVB350BYPTL-E	B	31.0/27.8
D31	1750001910	S.DIO HVD144AKRF-E	B	40.3/30.1
D32	1750001910	S.DIO HVD144AKRF-E	T	36.6/28.4
D33	1750001910	S.DIO HVD144AKRF-E	B	36.7/39.8
D34	1750001910	S.DIO HVD144AKRF-E	T	36.5/41.0
D36	1750000571	S.DIO 1SS381 (TPH3F)	B	54.1/40.0
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D37	1750000571	S.DIO 1SS381 (TPH3F)	B	51.7/36.8
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
D38	1750000571	S.DIO 1SS381(TPH3F)	B	56.6/40.0
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D39	1750000571	S.DIO 1SS381(TPH3F)	B	58.1/38.6
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D51	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	91.9/17.8
D52	1750002170	S.DIO DB2S31400L	B	26.2/41.0
D53	1750001810	S.DIO L1SS400T1G <SLVJ>	B	71.5/12.8
D54	1750001810	S.DIO L1SS400T1G <SLVJ>	B	71.5/15.3
D55	1750001810	S.DIO L1SS400T1G <SLVJ>	B	22.8/34.9
D59	1750001850	S.DIO LDAN22T1G <SLVJ>	B	4.2/37.5
D60	1750000571	S.DIO 1SS381(TPH3F)	B	84.8/23.2
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D901	1750002170	S.DIO DB2S31400L	T	87.1/27.9
D902	1750002170	S.DIO DB2S31400L	B	86.2/44.9
D903	1750002170	S.DIO DB2S31400L	B	92.1/30.8
D904	1750002170	S.DIO DB2S31400L	T	88.4/27.9
D905	1750002170	S.DIO DB2S31400L	B	96.3/30.8
F11	2030000870	S.MON MFT46.3P3 46.350 MHz (FL-442)	B	35.4/34.1
F12	2010002760	S.XTA MFT46.3J 46.350 MHz (FL-448)	T	36.6/34.5
F13	2020002410	CER LTM450FW <JJE>		
F14	2020002570	CER LTM450HW <JJE>		
F15	2020002610	S.CER LTUCG450G <JJE>	T	64.7/43.6
X1	6070000310	S.DIS JTBM450CPX30 <JJE>	T	47.6/40.9
X2	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz	T	41.9/15.0
X51	6050013160	S.XTA CR-912 TSS3225A 19.6608 MHz	T	81.8/21.4
X900	6050013170	S.XTA CR-914 TTS18VSE-A11 12.288 MHz	B	75.1/46.0
L1	6200012780	S.COI 0.30-1.4-6TL 27.2N <COMO>	B	9.4/7.9
L2	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	9.6/11.7
L3	6200012910	S.COI 0.35-1.6-8TL 45.5N <COMO>	B	11.2/15.6
L4	6200002861	S.COI NLV25T-4R7J	B	18.4/17.8
L5	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	18.4/14.1
L6	6200012390	S.COI 0.30-0.92-3TR 5.8N <COMO>	B	22.0/14.1
L7	6200013010	S.COI 0.30-0.9-STL 10.3N <COMO>	B	24.3/15.3
L8	6200013100	S.COI 0.45-1.5-STL 18.3N <COMO>	B	25.2/19.0
L9	6200007871	S.COI ELJRF 39NJFB	B	42.2/11.3
L11	6200012470	S.COI 0.30-1.7-TTL 45.3N <COMO>	B	14.1/19.6
L12	6200011021	S.COI ELJRF 82NJFB	B	12.4/22.8
L13	6200007750	S.COI LQW2BHN56NJ03L	B	14.4/26.8
L14	6200008090	S.COI LQW2BHN68NJ03L	B	21.1/26.8
L15	6200010910	S.COI LQW18AN56NG00D	B	27.1/27.8
L16	6200010910	S.COI LQW18AN56NG00D	B	33.3/27.5
L18	6200007901	S.COI ELJRF 22NJFB	B	32.8/13.4
L19	6200011011	S.COI ELJRF 68NJFB	B	34.4/23.9
L20	6200004770	S.COI ELJNC R56J-F	B	39.1/26.4
L23	6200012170	S.COI MLG1608S R18J-T	T	41.9/35.7
L24	6200012170	S.COI MLG1608S R18J-T	T	45.2/34.2
L31	6200011031	S.COI ELJRF R10JFB	T	56.6/17.7
L32	6200011031	S.COI ELJRF R10JFB	B	53.1/21.7
L33	6200011031	S.COI ELJRF R10JFB	T	62.5/17.7
L34	6190002030	S.COI MLG1608S 1R0J-T	B	57.1/29.6
L35	6200008090	S.COI LQW2BHN68NJ03L	T	55.7/27.7
L36	6190002030	S.COI MLG1608S 1R0J-T	B	50.7/25.7
L37	6200007720	S.COI LQW2BHN33NJ03L	T	53.8/22.6
L38	6200003640	S.COI MLF1608E 100K-T	T	53.0/25.6
L39	6190002030	S.COI MLG1608S 1R0J-T	B	60.6/28.7
L40	6200007760	S.COI LQW2BHN82NJ03L	T	62.9/27.9
L41	6200003640	S.COI MLF1608E 100K-T	T	64.6/27.5
L42	6200008090	S.COI LQW2BHN68NJ03L	T	64.3/20.6
L43	6190002030	S.COI MLG1608S 1R0J-T	B	59.4/22.7
L46	6200007881	S.COI ELJRF 33NJFB	B	48.8/19.5
L51	6200014170	S.COI VLCF4028T-4R7N1R5-2	T	96.5/14.3
L900	6200014160	S.COI VLCF4028T-100M1R0-2	T	77.7/42.9
L901	6200007830	S.COI ELJFC 4R7K-F	B	84.5/48.0
R1	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	9.1/5.7
R2	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/19.2
R3	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/18.3
R7	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	34.0/5.7
R8	7030005220	S.RES ERJ2GEJ 223 X (22K)	T	31.1/5.7
R9	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	31.1/6.6
R10	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	33.0/11.5
R11	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	32.1/11.5
R12	7030005110	S.RES ERJ2GEJ 224 X (220K)	T	32.8/5.7
R13	7030005530	S.RES ERJ2GEJ 100 X (10)	T	34.8/9.9
R14	7030004980	S.RES ERJ2GEJ 101 X (100)	T	35.4/7.5
R15	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	36.3/7.5
R16	7030010040	S.RES ERJ2GEJ-JPW	T	29.4/7.1
R19	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	15.2/11.4
R20	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/12.3
R21	7030007250	S.RES ERJ2GEJ 220 X (22)	B	32.3/10.9
R22	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	31.0/9.2
R23	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	33.7/10.4
R24	7030005590	S.RES ERJ2GEJ 680 X (68)	B	38.4/10.9
R25	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	40.2/10.9
R26	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	38.4/9.2
R27	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	15.2/12.3
R28	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/13.2
R31	7030005530	S.RES ERJ2GEJ 100 X (10)	B	43.1/15.8
R32	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	43.1/14.9
R33	7030004980	S.RES ERJ2GEJ 101 X (100)	B	44.5/13.1
R34	7030008010	S.RES ERJ2GEJ 123 X (12K)	T	82.0/12.9

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION		M.	H/V LOCATION
R35	7030007290	S.RES	ERJ2GEJ 222 X (2.2K)	B	46.4/14.0
R36	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	49.6/13.1
R37	7030004980	S.RES	ERJ2GEJ 101 X (100)	B	49.6/14.0
R38	7030005120	S.RES	ERJ2GEJ 102 X (1K)	B	51.8/15.7
R39	7030005700	S.RES	ERJ2GEJ 274 X (270K)	B	78.6/32.9
R40	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	78.6/34.5
R41	7030005530	S.RES	ERJ2GEJ 100 X (10)	T	53.0/17.7
R42	7030005240	S.RES	ERJ2GEJ 473 X (47K)	T	56.6/19.4
R43	7030005530	S.RES	ERJ2GEJ 100 X (10)	B	55.0/21.7
R44	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	55.0/19.5
R45	7030004980	S.RES	ERJ2GEJ 101 X (100)	T	63.4/17.7
R46	7030005310	S.RES	ERJ2GEJ 124 X (120K)	T	62.5/19.3
R49	7030006610	S.RES	ERJ2GEJ 394 X (390K)	B	80.0/28.4
R50	7030010040	S.RES	ERJ2GEJ-JPW	T	33.9/11.5
R51	7030008370	S.RES	ERJ2GEJ 561 X (560)	B	56.5/22.9
R52	7030008370	S.RES	ERJ2GEJ 561 X (560)	B	60.4/24.4
R53	7030008340	S.RES	RR0510P-182-D (1.8K)	T	55.7/23.7
R54	7030011000	S.RES	RR0510P-392-D (3.9K)	T	57.9/25.9
R55	7030008340	S.RES	RR0510P-182-D (1.8K)	T	61.8/23.7
R56	7030011000	S.RES	RR0510P-392-D (3.9K)	T	58.9/25.9
R57	7030009320	S.RES	ERJ2GEJ 4R7 X (4.7)	T	60.7/25.9
R58	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	62.3/30.7
R59	7030005700	S.RES	ERJ2GEJ 274 X (270K)	B	62.3/32.5
R61	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	82.7/42.5
R62	7030005310	S.RES	ERJ2GEJ 124 X (120K)	B	62.7/34.7
R63	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	65.7/37.6
R65	7030005720	S.RES	ERJ2GEJ 563 X (56K)	B	62.7/28.3
R66	7030008300	S.RES	ERJ2GEJ 184 X (180K)	B	64.3/27.4
R67	7030007290	S.RES	ERJ2GEJ 222 X (2.2K)	B	62.5/19.1
R68	7030005170	S.RES	ERJ2GEJ 474 X (470K)	B	62.7/26.4
R69	7030005060	S.RES	ERJ2GEJ 333 X (33K)	B	64.3/25.5
R70	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	62.7/25.5
R71	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	46.8/29.6
R72	7030005120	S.RES	ERJ2GEJ 102 X (1K)	B	50.1/29.6
R73	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	51.9/31.2
R74	7030005290	S.RES	ERJ2GEJ 682 X (6.8K)	B	50.1/31.2
R76	7030004990	S.RES	ERJ2GEJ 221 X (220)	T	48.4/25.0
R77	7030008400	S.RES	ERJ2GEJ 182 X (1.8K)	T	46.7/25.9
R78	7030010040	S.RES	ERJ2GEJ-JPW	T	46.7/23.8
R79	7030008400	S.RES	ERJ2GEJ 182 X (1.8K)	T	46.7/25.0
R80	7410001130	S.ARR	EXB28V102JX	T	41.9/27.8
R81	7030005600	S.RES	ERJ2GEJ 273 X (27K)	T	46.4/22.0
R82	7030005050	S.RES	ERJ2GEJ 103 X (10K)	T	40.1/18.8
R83	7030004970	S.RES	ERJ2GEJ 470 X (47)	T	44.1/19.3
R84	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	40.1/23.7
R87	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	61.1/27.5
R88	7510001730	S.THE	ERTJOEP 473J	T	58.8/10.4
R89	7030010080	S.RES	ERJ2RHD 1003X (100K)	B	58.2/12.6
R101	7030005230	S.RES	ERJ2GEJ 334 X (330K)	B	28.3/32.7
R102	7030005170	S.RES	ERJ2GEJ 474 X (470K)	B	29.2/32.7
R103	7030009290	S.RES	ERJ2GEJ 562 X (5.6K)	B	31.0/30.7
R104	7030005040	S.RES	ERJ2GEJ 472 X (4.7K)	B	17.4/26.0
R105	7030005040	S.RES	ERJ2GEJ 472 X (4.7K)	B	18.3/26.0
R106	7030005310	S.RES	ERJ2GEJ 124 X (120K)	B	22.9/26.9
R107	7030008290	S.RES	ERJ2GEJ 183 X (18K)	B	22.6/30.0
R108	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	22.9/28.7
R109	7030005530	S.RES	ERJ2GEJ 100 X (10)	B	23.5/30.0
R110	7030008280	S.RES	ERJ2GEJ 271 X (270)	B	23.5/25.6
R111	7030005110	S.RES	ERJ2GEJ 224 X (220K)	B	24.4/30.0
R112	7030004970	S.RES	ERJ2GEJ 470 X (47)	B	27.1/25.6
R113	7030008370	S.RES	ERJ2GEJ 561 X (560)	B	29.2/27.5
	7030008280	S.RES	ERJ2GEJ 271 X (270)		
	7030008280	S.RES	ERJ2GEJ 271 X (270)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008280	S.RES	ERJ2GEJ 271 X (270)		
	7030008280	S.RES	ERJ2GEJ 271 X (270)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
	7030008370	S.RES	ERJ2GEJ 561 X (560)		
R114	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	30.1/25.6
R115	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	31.0/25.6
R116	7030005080	S.RES	ERJ2GEJ 823 X (82K)	B	34.7/28.8
R117	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	33.4/23.9
R118	7030005100	S.RES	ERJ2GEJ 154 X (150K)	B	36.4/23.9
R119	7030005310	S.RES	ERJ2GEJ 124 X (120K)	B	36.3/27.9
R120	7030005590	S.RES	ERJ2GEJ 680 X (68)	B	39.2/23.9
R121	7030007300	S.RES	ERJ2GEJ 332 X (3.3K)	B	41.0/26.3
R122	7030004970	S.RES	ERJ2GEJ 470 X (47)	B	41.9/23.9
R123	7030010040	S.RES	ERJ2GEJ-JPW	B	75.1/22.8
R126	7030004980	S.RES	ERJ2GEJ 101 X (100)	B	39.1/45.3
R127	7030005310	S.RES	ERJ2GEJ 124 X (120K)	B	37.9/40.8
R128	7030005010	S.RES	ERJ2GEJ 681 X (680)	B	39.1/44.4
R129	7030005000	S.RES	ERJ2GEJ 471 X (470)	B	37.4/22.3
R130	7030005530	S.RES	ERJ2GEJ 100 X (10)	B	36.4/22.3
R131	7030005000	S.RES	ERJ2GEJ 471 X (470)	B	35.4/22.3
R132	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	47.4/17.7
R134	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	93.0/12.6
R135	7030005030	S.RES	ERJ2GEJ 152 X (1.5K)	T	43.1/37.7
R136	7030005030	S.RES	ERJ2GEJ 152 X (1.5K)	T	42.9/38.9
R138	7030005000	S.RES	ERJ2GEJ 471 X (470)	B	43.0/35.5
R139	7030005310	S.RES	ERJ2GEJ 124 X (120K)	B	48.3/35.5
R140	7030008410	S.RES	ERJ2GEJ 392 X (3.9K)	B	46.5/34.6
R141	7030005070	S.RES	ERJ2GEJ 683 X (68K)	B	46.5/33.7

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R142	7030005700	S.RES ERJ2GEJ 274 X (270K) [#02]	B	44.9/33.7
	7030005310	S.RES ERJ2GEJ 124 X (120K) [#07]		
	7030005310	S.RES ERJ2GEJ 124 X (120K) [#08]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#13]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#14]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#18]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#19]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#20]		
	7030005310	S.RES ERJ2GEJ 124 X (120K) [#51]		
	7030005310	S.RES ERJ2GEJ 124 X (120K) [#52]		
	7030005700	S.RES ERJ2GEJ 274 X (270K) [#53]		
R146	7030004970	S.RES ERJ2GEJ 470 X (47K)	B	45.6/44.0
R147	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	47.1/42.2
R148	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.9/33.7
R149	7030007060	S.RES ERJ2GEJ 684X (680K)	T	41.5/32.3
R151	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	51.7/39.0
R152	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	53.0/35.2
R153	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	55.5/38.7
R154	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	57.8/36.9
R155	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	58.8/39.8
R156	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	21.4/25.5
R157	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	31.0/23.9
R158	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	59.7/35.7
R159	7030008370	S.RES ERJ2GEJ 561 X (560)	B	54.6/35.7
R161	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	62.4/42.8
R162	7030004980	S.RES ERJ2GEJ 101 X (100)	B	64.0/42.8
R163	7030004980	S.RES ERJ2GEJ 101 X (100)	B	69.5/46.4
R164	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	67.4/41.1
R165	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	65.7/44.8
R166	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	65.7/43.9
R167	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	65.7/43.0
R169	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	65.7/42.1
R171	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	36.6/27.4
R172	7030005530	S.RES ERJ2GEJ 100 X (10K)	B	39.2/31.1
R173	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.5/32.3
R174	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	38.7/39.9
R175	7030008370	S.RES ERJ2GEJ 561 X (560)	B	35.1/38.8
R176	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	35.5/40.6
R177	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.1/40.7
R178	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	39.2/40.7
R181	7030010040	S.RES ERJ2GEJ-JPW	T	35.5/29.6
R182	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	T	34.0/28.4
R183	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	T	37.8/41.1
R184	7030005010	S.RES ERJ2GEJ 681 X (680)	T	37.8/39.3
R185	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	73.0/21.7
R186	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	73.0/22.6
R190	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	65.7/46.6
R243	7030005530	S.RES ERJ2GEJ 100 X (10K)	B	82.1/21.8
R244	7030005160	S.RES ERJ2GEJ 105 X (1M)	B	83.0/21.8
R357	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	58.2/10.2
R358	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/8.7
R359	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/10.5
R360	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	56.0/9.6
R361	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	24.8/41.7
R362	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	51.6/7.5
R363	7030005000	S.RES ERJ2GEJ 471 X (47K)	B	58.2/8.6
R364	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	55.3/2.2
R365	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	26.2/38.9
R367	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	53.6/2.2
R398	7030008310	S.RES ERJ2GEJ 564 X (560K)	T	43.7/11.0
R405	7030011290	S.RES ERJ2Y1R8U (1.8)	T	31.5/35.6
R406	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	12.6/45.7
R408	7030004980	S.RES ERJ2GEJ 101 X (100)	B	35.6/46.3
R412	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	15.9/39.5
R413	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	19.1/34.7
R414	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	20.7/34.1
R416	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	21.5/36.0
R417	7030007570	S.RES ERJ2GEJ 122 X (1.2K)	B	21.3/37.2
R418	7030009280	S.RES ERJ2GEJ 391 X	B	19.8/37.9
R420	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	89.9/25.5
R421	7210003610	VAR F081-0025A <SLVJ>		
R423	7030012530	S.RES ERJ2RHD 3302X (33.0K)	T	6.2/36.5
R424	7030012540	S.RES ERJ2RHD 1502X (15.0K)	T	4.8/38.4
R426	7030009140	S.RES ERJ2GEJ 272 X (2.7K)	B	80.4/26.3
R427	7030007340	S.RES ERJ2GEJ 153 X (15K)	B	79.5/26.3
R430	7030005160	S.RES ERJ2GEJ 105 X (1M)	B	74.4/13.4
R431	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	66.0/14.3
R432	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	67.8/12.7
R433	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	65.7/38.5
R434	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	65.7/39.4
R435	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	66.0/12.7
R436	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	66.9/12.7
R437	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	15.0/37.1
R439	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	72.8/13.4
R440	7030009280	S.RES ERJ2GEJ 391 X	B	17.4/43.5
R441	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	19.1/33.8
R442	7030007280	S.RES ERJ2GEJ 331 X (330)	B	21.5/35.1
R444	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	89.3/12.8
R451	7030005060	S.RES ERJ2GEJ 333 X (33K)	T	24.6/30.5
R452	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/30.5
R453	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/29.6
R454	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	23.0/30.5
R468	7030005010	S.RES ERJ2GEJ 681 X (680)	T	76.6/17.6
R469	7030008280	S.RES ERJ2GEJ 271 X (270)	T	77.5/20.4
R491	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	80.8/31.3
R492	7030009140	S.RES ERJ2GEJ 272 X (2.7K)	B	77.7/34.5
R495	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	82.1/30.0
R496	7030008010	S.RES ERJ2GEJ 123 X (12K)	B	79.5/32.9
R499	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	82.1/28.4
R502	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	78.1/31.3
R517	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	B	65.9/26.4
R518	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	65.9/25.5
R614	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	65.9/27.4
R619	7030005530	S.RES ERJ2GEJ 100 X (10K)	B	96.5/15.6
R620	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	92.7/10.0

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.		DESCRIPTION	M.	H/V LOCATION
R621	7030007340	S.RES	ERJ2GEJ 153 X (15K)	T	93.6/10.0
R622	7030005240	S.RES	ERJ2GEJ 473 X (47K)	T	92.7/8.0
R623	7030009290	S.RES	ERJ2GEJ 562 X (5.6K)	T	6.4/46.2
R624	7030005050	S.RES	ERJ2GEJ 103 X (10K)	T	89.3/11.2
R625	7030005700	S.RES	ERJ2GEJ 274 X (270K)	B	7.8/37.2
R626	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	6.2/37.2
R627	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	77.5/21.3
R628	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	88.2/17.0
R629	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	84.8/21.8
R630	7030010040	S.RES	ERJ2GEJ-JPW	B	67.1/25.8
R631	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	82.5/25.5
R632	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	82.6/23.0
R633	7030005040	S.RES	ERJ2GEJ 472 X (4.7K)	B	85.6/24.3
R634	7030005050	S.RES	ERJ2GEJ 103 X (10K)	T	83.2/11.3
R635	7030005050	S.RES	ERJ2GEJ 103 X (10K)	T	88.2/15.5
R636	7030005050	S.RES	ERJ2GEJ 103 X (10K)	T	88.2/14.6
R637	7030005050	S.RES	ERJ2GEJ 103 X (10K)	T	87.4/19.9
R638	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	77.4/16.1
R639	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	78.6/15.7
R640	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	74.4/11.6
R641	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	77.5/22.2
R646	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	93.7/22.8
R647	7030005120	S.RES	ERJ2GEJ 102 X (1K)	B	90.3/21.0
R651	7030005120	S.RES	ERJ2GEJ 102 X (1K)	T	86.7/13.5
R652	7030005120	S.RES	ERJ2GEJ 102 X (1K)	B	90.4/22.2
R653	7030005120	S.RES	ERJ2GEJ 102 X (1K)	B	85.7/21.8
R657	7030005120	S.RES	ERJ2GEJ 102 X (1K)	T	84.9/13.1
R661	7410001130	S.ARR	EXB28V102JX	B	90.9/12.3
R662	7410001130	S.ARR	EXB28V102JX	B	90.9/14.8
R663	7410001130	S.ARR	EXB28V102JX	B	88.4/22.3
R664	7410001150	S.ARR	EXB28V471JX	B	80.3/22.3
R665	7410001130	S.ARR	EXB28V102JX	B	77.8/22.3
R666	7410001130	S.ARR	EXB28V102JX	B	75.4/9.9
R667	7410001130	S.ARR	EXB28V102JX	B	79.4/6.4
R668	7410001130	S.ARR	EXB28V102JX	B	82.4/6.4
R669	7410001130	S.ARR	EXB28V102JX	B	85.2/6.4
R683	7030005120	S.RES	ERJ2GEJ 102 X (1K)	B	90.7/19.7
R688	7030005110	S.RES	ERJ2GEJ 224 X (220K)	T	81.1/21.0
R691	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	82.9/12.9
R692	7030005120	S.RES	ERJ2GEJ 102 X (1K)	T	92.3/20.4
R693	7030007340	S.RES	ERJ2GEJ 153 X (15K)	B	93.7/21.9
R694	7030012540	S.RES	ERJ2RHD 1502X (15.0K)	B	91.9/20.6
R901	7410001170	S.ARR	EXB28V470JX	B	79.5/36.7
R904	7030008010	S.RES	ERJ2GEJ 123 X (12K)	B	74.2/21.1
R905	7030007250	S.RES	ERJ2GEJ 220 X (22)	T	75.2/34.3
R906	7030005210	S.RES	ERJ2GEJ 822 X (8.2K)	T	75.2/31.6
R907	7030005210	S.RES	ERJ2GEJ 822 X (8.2K)	T	75.2/32.5
R908	7030008010	S.RES	ERJ2GEJ 123 X (12K)	B	75.1/21.1
R910	7030005240	S.RES	ERJ2GEJ 473 X (47K)	T	79.8/33.6
R913	7030005310	S.RES	ERJ2GEJ 124 X (120K)	B	71.4/21.7
R915	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	84.8/34.2
R917	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	85.6/32.1
R920	7030007270	S.RES	ERJ2GEJ 151 X (150)	B	83.0/30.0
R921	7030007270	S.RES	ERJ2GEJ 151 X (150)	T	79.8/34.5
R922	7030004980	S.RES	ERJ2GEJ 101 X (100)	B	85.5/35.2
R923	7030005120	S.RES	ERJ2GEJ 102 X (1K)	B	72.3/47.0
R925	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	75.5/49.3
R930	7030005240	S.RES	ERJ2GEJ 473 X (47K)	T	83.1/28.2
R931	7030005240	S.RES	ERJ2GEJ 473 X (47K)	T	82.2/28.2
R932	7030005240	S.RES	ERJ2GEJ 473 X (47K)	T	82.2/29.8
R933	7030004970	S.RES	ERJ2GEJ 470 X (47)	B	72.3/46.1
R934	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	76.9/48.6
R935	7030004970	S.RES	ERJ2GEJ 470 X (47)	B	81.4/48.6
R936	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	79.6/48.6
R937	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	78.7/48.6
R938	7030004980	S.RES	ERJ2GEJ 101 X (100)	B	80.3/43.8
R939	7030007290	S.RES	ERJ2GEJ 222 X (2.2K)	B	79.9/42.0
R940	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	78.2/41.2
R941	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	77.5/43.1
R942	7030007270	S.RES	ERJ2GEJ 151 X (150)	B	71.8/35.3
R943	7030004990	S.RES	ERJ2GEJ 221 X (220)	B	77.8/38.0
R944	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	82.7/40.7
R945	7410001140	S.ARR	EXB28V104JX	T	86.5/43.9
R946	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	82.7/41.6
R947	7410001140	S.ARR	EXB28V104JX	B	93.8/37.6
R948	7410001140	S.ARR	EXB28V104JX	B	87.8/35.8
R949	7410001140	S.ARR	EXB28V104JX	B	93.9/33.0
R950	7410001140	S.ARR	EXB28V104JX	B	88.4/33.0
R951	7410001140	S.ARR	EXB28V104JX	T	85.3/29.3
R952	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	78.5/36.9
R953	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	78.9/37.8
R956	7030010040	S.RES	ERJ2GEJ-JPW	B	96.3/32.9
R957	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	94.7/30.9
R958	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	85.7/42.4
R961	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	90.9/30.9
R962	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	89.5/28.4
R963	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	95.4/32.9
R964	7410001140	S.ARR	EXB28V104JX	B	85.9/39.4
R965	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	79.8/31.7
R966	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	79.8/32.6
R968	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	88.9/18.3
R969	7030005160	S.RES	ERJ2GEJ 105 X (1M)	T	88.3/19.4
R970	7030010040	S.RES	ERJ2GEJ-JPW	B	71.0/39.1
R973	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	66.9/35.5
R974	7030005220	S.RES	ERJ2GEJ 223 X (22K)	B	78.1/29.7
R975	7030005050	S.RES	ERJ2GEJ 103 X (10K)	B	79.9/29.7
R976	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	66.9/34.6
R977	7030005060	S.RES	ERJ2GEJ 333 X (33K)	B	65.3/35.0
R981	7030010040	S.RES	ERJ2GEJ-JPW	T	80.2/8.9
C2	4030017620	S.CER	C1005 CH 1H 100C-T	B	10.3/6.1
C3	4030017410	S.CER	C1005 CH 1H 240J-T	B	7.4/12.0
C4	4030017570	S.CER	C1005 CH 1H 040B-T	B	11.5/11.4
C5	4030017650	S.CER	C1005 CH 1H 270J-T	B	12.4/11.4

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C6	4030017550	S.CER C1005 CH 1H 1R5B-T	B	11.5/13.0
C7	4030017640	S.CER C1005 CH 1H 150J-T	B	12.4/13.0
C8	4030017460	S.CER C1005 JB 1H 102K-T	B	14.5/17.2
C11	4030017460	S.CER C1005 JB 1H 102K-T	B	20.6/20.1
C15	4030017400	S.CER C1005 CH 1H 220J-T	B	16.3/14.3
C16	4030017390	S.CER C1005 CH 1H 180J-T	B	17.9/11.3
C20	4030017460	S.CER C1005 JB 1H 102K-T	B	20.4/14.1
C21	4030008560	S.CER C1608 CH 1H 300J-T	B	21.3/10.4
C22	4030007040	S.CER C1608 CH 1H 180J-T	B	22.0/12.4
C23	4030008560	S.CER C1608 CH 1H 300J-T	B	22.7/10.4
C24	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/11.4
C25	4030017460	S.CER C1005 JB 1H 102K-T	T	19.8/10.5
C26	4030017460	S.CER C1005 JB 1H 102K-T	T	29.4/5.7
C27	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/5.8
C28	4030017460	S.CER C1005 JB 1H 102K-T	T	33.0/13.1
C29	4030016930	S.CER C1005 JB 1A 104K-T	T	31.2/11.5
C30	4030018890	S.CER C1005 JB 0J 224K-T	T	32.8/6.6
C31	4030016930	S.CER C1005 JB 1A 104K-T	T	34.8/11.5
C32	4030017460	S.CER C1005 JB 1H 102K-T	T	35.7/9.9
C33	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/7.5
C34	4030018860	S.CER C1005 JB 0J 105K-T	T	38.1/7.5
C35	4030017420	S.CER C1005 CH 1H 470J-T	B	37.5/9.2
C36	4030017460	S.CER C1005 JB 1H 102K-T	B	39.3/9.2
C37	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/12.3
C38	4030017460	S.CER C1005 JB 1H 102K-T	T	17.9/12.7
C40	4030017420	S.CER C1005 CH 1H 470J-T	T	21.4/13.2
C41	4030017460	S.CER C1005 JB 1H 102K-T	B	28.0/17.6
C43	4030017490	S.CER C1608 JB 1A 105K-T	B	27.8/20.3
C44	4030017460	S.CER C1005 JB 1H 102K-T	T	32.7/16.6
C45	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/12.3
C46	4030017510	S.CER C1005 CH 1H 680J-T	B	32.8/12.4
C48	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/9.2
C49	4030017420	S.CER C1005 CH 1H 470J-T	B	31.9/9.2
C51	4030017460	S.CER C1005 JB 1H 102K-T	B	23.5/22.8
C52	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/14.4
C53	4030017460	S.CER C1005 JB 1H 102K-T	B	37.5/10.9
C54	4030016790	S.CER C1005 JB 1E 103K-T	B	39.3/10.9
C55	4030017490	S.CER C1608 JB 1A 105K-T	B	33.5/16.6
C56	4030017430	S.CER C1005 CH 1H 101J-T	B	39.9/13.1
C57	4030017460	S.CER C1005 JB 1H 102K-T	B	43.1/16.7
C58	4030017420	S.CER C1005 CH 1H 470J-T	B	43.9/11.3
C59	4030017460	S.CER C1005 JB 1H 102K-T	B	42.2/10.4
C60	4030017460	S.CER C1005 JB 1H 102K-T	B	44.5/12.2
C63	4030017650	S.CER C1005 CH 1H 270J-T	B	46.4/14.9
C64	4030016790	S.CER C1005 JB 1E 103K-T	B	49.6/12.1
C65	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/14.0
C71	4030017620	S.CER C1005 CH 1H 100C-T	B	51.8/16.6
C72	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/17.8
C73	4030017460	S.CER C1005 JB 1H 102K-T	T	53.0/19.4
C74	4030017590	S.CER C1005 CH 1H 070C-T	T	58.0/18.9
C75	4030017460	S.CER C1005 JB 1H 102K-T	T	54.1/20.4
C76	4030017460	S.CER C1005 JB 1H 102K-T	T	55.0/18.6
C77	4030017460	S.CER C1005 JB 1H 102K-T	B	64.3/17.7
C78	4030017460	S.CER C1005 JB 1H 102K-T	T	58.9/18.9
C79	4030016930	S.CER C1005 JB 1A 104K-T	B	64.4/21.3
C80	4030017460	S.CER C1005 JB 1H 102K-T	B	63.0/35.6
C81	4030017360	S.CER C1005 CH 1H 030B-T	T	58.5/17.3
C83	4030017540	S.CER C1005 CH 1H R75B-T	T	58.9/21.2
C85	4030017460	S.CER C1005 JB 1H 102K-T	T	57.1/21.2
C86	4030017660	S.CER C1005 CH 1H 330J-T	T	57.0/25.9
C87	4030017660	S.CER C1005 CH 1H 330J-T	T	58.0/21.2
C88	4030017660	S.CER C1005 CH 1H 330J-T	T	56.1/25.9
C89	4030017660	S.CER C1005 CH 1H 330J-T	T	57.9/27.5
C90	4030017460	S.CER C1005 JB 1H 102K-T	B	60.6/34.5
C92	4030017420	S.CER C1005 CH 1H 470J-T	T	53.2/28.5
C94	4030017420	S.CER C1005 CH 1H 470J-T	B	59.9/21.7
C95	4030017610	S.CER C1005 CH 1H 090C-T	T	53.2/27.5
C97	4030020000	S.CER C1005 JB 1A 105K-T	B	68.9/23.1
C99	4030020000	S.CER C1005 JB 1A 105K-T	B	69.1/24.3
C100	4030016930	S.CER C1005 JB 1A 104K-T	B	70.6/35.9
C101	4030017530	S.CER C1005 CH 1H 0R5B-T	T	59.8/21.2
C102	4030016930	S.CER C1005 JB 1A 104K-T	T	56.2/21.8
C103	4030017460	S.CER C1005 JB 1H 102K-T	T	61.8/21.8
C104	4030017390	S.CER C1005 CH 1H 180J-T	T	59.8/25.9
C105	4030017660	S.CER C1005 CH 1H 330J-T	T	60.7/21.2
C106	4030017510	S.CER C1005 CH 1H 680J-T	T	61.6/26.0
C107	4030017660	S.CER C1005 CH 1H 330J-T	T	61.1/27.2
C109	4550008090	S.TAN TCTU0J105K8R	B	61.5/34.6
C110	4030017340	S.CER C1005 CH 1H 010B-T	T	61.1/29.2
C111	4030017440	S.CER C1005 CH 1H 221J-T	T	62.7/25.3
C112	4030017460	S.CER C1005 JB 1H 102K-T	B	61.1/32.2
C113	4030017360	S.CER C1005 CH 1H 030B-T	T	64.7/23.5
C114	4030017360	S.CER C1005 CH 1H 030B-T	T	63.8/23.1
C115	4030017610	S.CER C1005 CH 1H 090C-T	T	64.7/25.3
C116	4030018860	S.CER C1005 JB 0J 105K-T	B	62.7/27.4
C117	4030018820	S.CER C1005 JB 1H 561K-T	B	61.1/26.5
C118	4030017420	S.CER C1005 CH 1H 470J-T	B	64.3/28.3
C119	4030016930	S.CER C1005 JB 1A 104K-T	B	61.1/31.3
C120	4030017460	S.CER C1005 JB 1H 102K-T	B	64.3/26.4
C121	4030019560	S.CER GRM21BB31C106KE15L	B	59.4/19.6
C122	4030016790	S.CER C1005 JB 1E 103K-T	B	66.0/15.9
C123	4030017460	S.CER C1005 JB 1H 102K-T	B	51.9/29.6
C124	4030017460	S.CER C1005 JB 1H 102K-T	B	51.0/31.2
C127	4030017460	S.CER C1005 JB 1H 102K-T	B	61.1/25.6
C128	4030017460	S.CER C1005 JB 1H 102K-T	B	70.6/35.0
C129	4030016930	S.CER C1005 JB 1A 104K-T	T	67.5/33.2
C132	4550000560	S.TAN TEESVA 1V 334M8R	T	48.3/21.4
C134	45500007550	S.TAN F931V344MAABMA		
C134	45500003250	S.TAN TEESVA 1V 474M8R	T	46.7/29.8
C136	45500007590	S.TAN F931V474MAABMA		
C136	4030017460	S.CER C1005 JB 1H 102K-T	T	66.6/33.2
C137	4030016930	S.CER C1005 JB 1A 104K-T	T	69.0/27.6
C138	4030017460	S.CER C1005 JB 1H 102K-T	T	69.0/26.7
C139	4030020000	S.CER C1005 JB 1A 105K-T	B	68.2/24.3
C140	4030020000	S.CER C1005 JB 1A 105K-T	B	70.0/24.3

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C141	4030017620	S.CER C1005 CH 1H 100C-T	B	50.4/19.5
C144	4030017430	S.CER C1005 CH 1H 101J-T	T	43.7/20.5
C145	4030018890	S.CER C1005 JB 0J 224K-T	T	42.8/20.5
C146	4030018890	S.CER C1005 JB 0J 224K-T	T	41.5/20.5
C147	4030017460	S.CER C1005 JB 1H 102K-T	T	46.4/21.1
C148	4030019560	S.CER GRM21BB31C106KE15L	B	44.0/26.2
C149	4030017430	S.CER C1005 CH 1H 101J-T	T	44.6/20.5
C150	4030016790	S.CER C1005 JB 1E 103K-T	T	43.9/28.1
C151	4030017430	S.CER C1005 CH 1H 101J-T	T	43.9/27.2
C152	4030017460	S.CER C1005 JB 1H 102K-T	T	44.0/29.0
C153	4030017420	S.CER C1005 CH 1H 470J-T	T	43.2/30.4
C154	4030017420	S.CER C1005 CH 1H 470J-T	T	42.3/30.4
C155	4030017420	S.CER C1005 CH 1H 470J-T	T	41.4/30.4
C156	4030016930	S.CER C1005 JB 1A 104K-T	T	40.5/30.4
C157	4030017460	S.CER C1005 JB 1H 102K-T	T	41.0/18.8
C158	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/18.8
C159	4030016930	S.CER C1005 JB 1A 104K-T	T	40.1/11.0
C160	4030017460	S.CER C1005 JB 1H 102K-T	T	41.9/11.0
C167	4030017630	S.CER C1005 CH 1H 120J-T	B	50.4/20.4
C168	4030017630	S.CER C1005 CH 1H 120J-T	B	48.9/21.6
C169	4030017620	S.CER C1005 CH 1H 100C-T	B	48.8/20.4
C171	4030018120	S.CER C1005 CH 1H 110J-T	B	16.2/18.5
C172	4030017640	S.CER C1005 CH 1H 150J-T	B	13.9/22.1
C173	4030017460	S.CER C1005 JB 1H 102K-T	B	13.4/24.4
C174	4030017580	S.CER C1005 CH 1H 060C-T	B	12.4/24.4
C175	4030017620	S.CER C1005 CH 1H 100C-T	B	12.9/26.5
C176	4030017430	S.CER C1005 CH 1H 101J-T	B	16.2/26.6
C177	4030017340	S.CER C1005 CH 1H 010B-T	B	16.4/27.8
C178	4030017550	S.CER C1005 CH 1H 1R5B-T	B	18.0/29.2
C179	4030017370	S.CER C1005 CH 1H 3R5B-T	B	19.6/27.8
C180	4030017430	S.CER C1005 CH 1H 101J-T	B	19.2/26.0
C181	4030017370	S.CER C1005 CH 1H 3R5B-T	B	22.9/27.8
C182	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/24.6
C183	4030017460	S.CER C1005 JB 1H 102K-T	B	16.2/25.7
C184	4030016930	S.CER C1005 JB 1A 104K-T	T	20.9/27.6
C186	4030016930	S.CER C1005 JB 1A 104K-T	B	21.7/30.0
C188	4030016930	S.CER C1005 JB 1A 104K-T	B	25.3/30.0
C189	4030017460	S.CER C1005 JB 1H 102K-T	B	27.1/23.9
C191	4030016790	S.CER C1005 JB 1E 103K-T	B	28.7/28.7
C192	4030017460	S.CER C1005 JB 1H 102K-T	B	26.2/25.6
C193	4030017460	S.CER C1005 JB 1H 102K-T	B	25.3/25.6
C195	4030017570	S.CER C1005 CH 1H 040B-T	B	28.2/27.5
C196	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/25.6
C197	4030017350	S.CER C1005 CH 1H 020B-T	B	31.0/29.8
C198	4030017460	S.CER C1005 JB 1H 102K-T	B	32.3/25.8
C199	4030017380	S.CER C1005 CH 1H 050B-T	B	34.4/26.6
C200	4030017580	S.CER C1005 CH 1H 060C-T	B	34.7/27.9
C201	4030017460	S.CER C1005 JB 1H 102K-T	T	31.8/23.6
C202	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/23.9
C203	4030016930	S.CER C1005 JB 1A 104K-T	B	30.1/23.9
C206	4030017620	S.CER C1005 CH 1H 100C-T	B	47.4/16.8
C210	4030017630	S.CER C1005 CH 1H 120J-T	B	35.4/23.9
C211	4030017460	S.CER C1005 JB 1H 102K-T	B	34.4/22.3
C214	4030017460	S.CER C1005 JB 1H 102K-T	B	37.4/23.9
C215	4030017390	S.CER C1005 CH 1H 180J-T	B	41.9/26.3
C216	4030017460	S.CER C1005 JB 1H 102K-T	B	41.0/23.9
C217	4030016790	S.CER C1005 JB 1E 103K-T	B	40.1/23.9
C218	4030016790	S.CER C1005 JB 1E 103K-T	B	37.5/28.5
C223	4030017460	S.CER C1005 JB 1H 102K-T	B	41.9/22.3
C224	4030017460	S.CER C1005 JB 1H 102K-T	B	47.4/18.6
C225	4030017460	S.CER C1005 JB 1H 102K-T	T	39.5/38.8
C226	4030016790	S.CER C1005 JB 1E 103K-T	B	37.3/44.4
C227	4030016790	S.CER C1005 JB 1E 103K-T	B	36.3/40.8
C231	4030017430	S.CER C1005 CH 1H 101J-T	B	40.6/42.6
C232	4030017660	S.CER C1005 CH 1H 330J-T	T	42.0/38.9
C233	4030017460	S.CER C1005 JB 1H 102K-T	B	41.2/38.9
C235	4030019560	S.CER GRM21BB31C106KE15L	B	44.5/42.6
C236	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/43.1
C238	4030017460	S.CER C1005 JB 1H 102K-T	B	41.2/39.8
C239	4030017720	S.CER C1005 JB 1H 331K-T	T	43.1/40.1
C240	4030017460	S.CER C1005 JB 1H 102K-T	B	44.7/35.5
C241	4030017420	S.CER C1005 CH 1H 470J-T	B	48.3/33.7
C242	4030017710	S.CER C1005 CH 1H 181J-T	B	48.3/34.6
	4030017440	S.CER C1005 CH 1H 221J-T	[#02]	
	4030017440	S.CER C1005 CH 1H 221J-T	[#07]	
	4030017440	S.CER C1005 CH 1H 221J-T	[#08]	
	4030017710	S.CER C1005 CH 1H 181J-T	[#13]	
	4030017710	S.CER C1005 CH 1H 181J-T	[#14]	
	4030017710	S.CER C1005 CH 1H 181J-T	[#18]	
	4030017710	S.CER C1005 CH 1H 181J-T	[#19]	
	4030017710	S.CER C1005 CH 1H 181J-T	[#20]	
	4030017440	S.CER C1005 CH 1H 221J-T	[#51]	
	4030017440	S.CER C1005 CH 1H 221J-T	[#52]	
	4030017710	S.CER C1005 CH 1H 181J-T	[#53]	
C243	4030017710	S.CER C1005 CH 1H 181J-T	B	46.5/35.5
C244	4030016930	S.CER C1005 JB 1A 104K-T	B	50.2/37.0
C246	4030018860	S.CER C1005 JB 0J 105K-T	B	73.0/20.8
C247	4030017670	S.CER C1005 CH 1H 390J-T	B	73.0/23.5
C251	4030017360	S.CER C1005 CH 1H 030B-T	T	44.1/36.8
C252	4030017500	S.CER C1005 CH 1H 560J-T	T	42.5/36.8
C253	4030017580	S.CER C1005 CH 1H 060C-T	T	44.1/35.9
C254	4030017500	S.CER C1005 CH 1H 560J-T	T	42.6/34.6
C255	4030016790	S.CER C1005 JB 1E 103K-T	T	45.1/32.1
C256	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/23.7
C257	4030016790	S.CER C1005 JB 1E 103K-T	T	40.9/34.6
C261	4030016930	S.CER C1005 JB 1A 104K-T	B	50.5/38.6
C262	4030016930	S.CER C1005 JB 1A 104K-T	B	50.2/40.7
C263	4030016930	S.CER C1005 JB 1A 104K-T	B	57.1/41.5
C264	4030016930	S.CER C1005 JB 1A 104K-T	B	53.0/36.1
C265	4030016930	S.CER C1005 JB 1A 104K-T	B	58.7/36.9
C266	4030016930	S.CER C1005 JB 1A 104K-T	B	56.3/37.5
C267	4030016930	S.CER C1005 JB 1A 104K-T	B	58.1/35.7
C271	4030016930	S.CER C1005 JB 1A 104K-T	B	61.5/43.8
C272	4030016930	S.CER C1005 JB 1A 104K-T	B	62.4/41.9
C273	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/45.7
C274	4030016930	S.CER C1005 JB 1A 104K-T	B	68.9/42.0

[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C275	4030017040	S.CER C1005 JB 1A 333K-T	B	67.9/46.4
C276	4030017650	S.CER C1005 CH 1H 270J-T	B	67.3/42.0
C277	4030016930	S.CER C1005 JB 1A 104K-T	B	65.8/41.2
C282	4030016790	S.CER C1005 JB 1E 103K-T	B	40.8/31.1
C283	4030017590	S.CER C1005 CH 1H 070C-T	B	39.0/35.3
C284	4030016790	S.CER C1005 JB 1E 103K-T	B	36.7/38.8
C286	4030016790	S.CER C1005 JB 1E 103K-T	T	34.9/28.4
C288	4030017600	S.CER C1005 CH 1H 080C-T	T	39.9/32.6
C290	4030016790	S.CER C1005 JB 1E 103K-T	T	37.8/40.2
C291	4030016930	S.CER C1005 JB 1A 104K-T	B	42.4/32.3
C292	4030016930	S.CER C1005 JB 1A 104K-T	T	38.3/44.1
C293	4030017460	S.CER C1005 JB 1H 102K-T	T	40.1/42.4
C311	4030018860	S.CER C1005 JB 0J 105K-T	T	26.3/31.4
C312	4030017710	S.CER C1005 CH 1H 181J-T	T	23.0/31.4
C313	4030016930	S.CER C1005 JB 1A 104K-T	T	21.2/28.0
C318	4030016790	S.CER C1005 JB 1E 103K-T	B	75.1/24.4
C323	4030016930	S.CER C1005 JB 1A 104K-T	T	81.4/11.3
C327	4030017900	S.CER C1005 JB 1E 123K-T	B	65.0/24.6
C328	4030020010	S.CER C1005 CH 1H 271J-T	B	65.9/28.3
C334	4030017460	S.CER C1005 JB 1H 102K-T	B	15.0/46.6
C335	4030017460	S.CER C1005 JB 1H 102K-T	B	24.6/38.2
C336	4030018860	S.CER C1005 JB 0J 105K-T	B	57.3/8.6
C337	4030017460	S.CER C1005 JB 1H 102K-T	B	52.5/7.5
C338	4030017460	S.CER C1005 JB 1H 102K-T	B	50.7/7.5
C339	4030017460	S.CER C1005 JB 1H 102K-T	B	53.4/7.5
C340	4030016930	S.CER C1005 JB 1A 104K-T	B	57.3/10.2
C341	4030018860	S.CER C1005 JB 0J 105K-T	B	59.1/10.2
C342	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/6.6
C343	4030019560	S.CER GRM21BB31C106KE15L	B	57.6/6.9
C344	4030016930	S.CER C1005 JB 1A 104K-T	B	55.1/2.2
C364	4030017630	S.CER C1005 CH 1H 120J-T	T	42.8/11.0
C381	4030016930	S.CER C1005 JB 1A 104K-T	B	81.1/25.1
C382	4030016930	S.CER C1005 JB 1A 104K-T	B	79.4/25.1
C383	4030018860	S.CER C1005 JB 0J 105K-T	B	77.6/25.1
C384	4030018860	S.CER C1005 JB 0J 105K-T	B	72.8/14.3
C385	4030016930	S.CER C1005 JB 1A 104K-T	B	72.8/12.5
C388	4030017460	S.CER C1005 JB 1H 102K-T	B	20.9/3.5
C389	4030017460	S.CER C1005 JB 1H 102K-T	B	43.9/2.5
C390	4030017460	S.CER C1005 JB 1H 102K-T	B	53.3/2.6
C391	4030017420	S.CER C1005 CH 1H 470J-T	B	37.3/46.3
C392	4030017420	S.CER C1005 CH 1H 470J-T	B	29.1/43.9
C393	4520000020	S.NIO NOJC227M006RWJV	B	19.8/40.5
C394	4030017460	S.CER C1005 JB 1H 102K-T	B	28.2/43.9
C395	4520000020	S.NIO NOJC227M006RWJV	T	21.2/37.1
C396	4030017460	S.CER C1005 JB 1H 102K-T	T	27.1/47.4
C397	4030017460	S.CER C1005 JB 1H 102K-T	T	25.2/37.4
C398	4030017460	S.CER C1005 JB 1H 102K-T	B	12.2/32.0
C399	4030016930	S.CER C1005 JB 1A 104K-T	B	22.2/37.2
C400	4550006250	S.TAN TEESVA 1A 106M8R	T	12.9/40.8
Eqv.	4550007520	S.TAN F931A106MAABMA		
C401	4030016930	S.CER C1005 JB 1A 104K-T	B	12.2/37.6
C403	4030018890	S.CER C1005 JB 0J 224K-T	B	15.0/39.5
C404	4030016930	S.CER C1005 JB 1A 104K-T	B	12.2/38.5
C405	4030018860	S.CER C1005 JB 0J 105K-T	B	19.3/33.7
C406	4030017460	S.CER C1005 JB 1H 102K-T	T	20.7/34.7
C408	4030016930	S.CER C1005 JB 1A 104K-T	T	4.8/37.5
C412	4030017460	S.CER C1005 JB 1H 102K-T	T	6.5/42.8
C413	4030017460	S.CER C1005 JB 1H 102K-T	B	7.7/31.9
C423	4030016790	S.CER C1005 JB 1E 103K-T	B	67.8/14.3
C426	4030016790	S.CER C1005 JB 1E 103K-T	B	65.7/40.3
C428	4030017460	S.CER C1005 JB 1H 102K-T	T	16.4/32.2
C429	4030016790	S.CER C1005 JB 1E 103K-T	B	66.9/14.3
C431	4510009870	S.ELE 10 CE 100 LD	T	14.7/27.2
C432	4030017430	S.CER C1005 CH 1H 101J-T	T	92.7/6.4
C433	4030017460	S.CER C1005 JB 1H 102K-T	T	17.3/32.2
C434	4030016790	S.CER C1005 JB 1E 103K-T	T	14.3/32.7
C435	4550007320	S.TAN F930J226MAABMA	T	19.4/30.8
C437	4030017460	S.CER C1005 JB 1H 102K-T	T	14.3/31.8
C448	4030019490	S.CER C2012 JB 1A 106K-T	B	28.3/46.0
C451	4030016930	S.CER C1005 JB 1A 104K-T	B	85.3/25.5
C452	4030016930	S.CER C1005 JB 1A 104K-T	B	86.2/25.5
C453	4030017640	S.CER C1005 CH 1H 150J-T	T	83.9/22.5
C454	4030017580	S.CER C1005 CH 1H 060C-T	T	85.2/21.3
C455	4030017640	S.CER C1005 CH 1H 150J-T	B	83.9/21.8
C456	4030016930	S.CER C1005 JB 1A 104K-T	T	82.3/11.3
C457	4030017030	S.CER C1005 JB 1A 273K-T	T	86.0/9.3
C458	4030018900	S.CER C1005 JB 0J 474K-T	T	84.2/19.8
C461	4030019990	S.CER C1005 JB 1C 104K-T	B	97.4/12.4
C462	4030020190	S.CER GRM32EB31C476KE15L	B	96.4/9.1
C463	4030019990	S.CER C1005 JB 1C 104K-T	T	93.6/8.0
C464	4030020190	S.CER GRM32EB31C476KE15L	T	90.7/7.0
C465	4050000240	S.FEE NFM18PC104R1C3D	T	88.5/9.1
C466	4030018860	S.CER C1005 JB 0J 105K-T	T	88.4/11.2
C467	4030016790	S.CER C1005 JB 1E 103K-T	T	88.4/12.8
C468	4030020190	S.CER GRM32EB31C476KE15L	B	92.4/8.0
C482	4030016930	S.CER C1005 JB 1A 104K-T	B	80.4/34.5
C483	4030018860	S.CER C1005 JB 0J 105K-T	B	78.6/26.8
C484	4030020120	S.CER C1005 JB 0J 225M-T	B	80.0/27.5
C485	4030018860	S.CER C1005 JB 0J 105K-T	B	80.4/32.9
C490	4030016930	S.CER C1005 JB 1A 104K-T	B	79.5/34.5
C492	4030017710	S.CER C1005 CH 1H 181J-T	B	79.0/31.3
C494	4030016780	S.CER C1005 JB 1E 153K-T	B	79.9/31.3
C501	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/16.1
C502	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/17.9
C503	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/15.2
C504	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/17.0
C505	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/14.3
C506	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/19.3
C507	4030018860	S.CER C1005 JB 0J 105K-T	T	83.3/8.9
C508	4030017460	S.CER C1005 JB 1H 102K-T	T	84.2/8.9
C509	4030018860	S.CER C1005 JB 0J 105K-T	T	86.5/19.9
C510	4030017460	S.CER C1005 JB 1H 102K-T	B	91.4/10.5
C511	4030018860	S.CER C1005 JB 0J 105K-T	T	90.5/21.3
C512	4030018860	S.CER C1005 JB 0J 105K-T	B	74.4/12.5
C513	4030016930	S.CER C1005 JB 1A 104K-T	T	85.6/19.9

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.


[MAIN-A UNIT] (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])

REF NO.	PARTS NO.		DESCRIPTION	M.	H/V LOCATION
C514	4030018860	S.CER	C1005 JB 0J 105K-T	T	76.6/18.5
C515	4030017460	S.CER	C1005 JB 1H 102K-T	T	90.5/22.2
C900	4030016930	S.CER	C1005 JB 1A 104K-T	T	75.4/35.7
C901	4030018910	S.CER	C1608 JB 0J 475K-T	T	76.4/36.0
C902	4050000240	S.FEE	NFM18PC104R1C3D	B	71.6/41.8
C903	4050000240	S.FEE	NFM18PC104R1C3D	B	72.3/40.3
C904	4050000240	S.FEE	NFM18PC104R1C3D	B	74.1/41.3
C907	4030017460	S.CER	C1005 JB 1H 102K-T	T	75.2/33.4
C908	4030018910	S.CER	C1608 JB 0J 475K-T	T	79.3/35.7
C909	4030016930	S.CER	C1005 JB 1A 104K-T	T	77.9/34.5
C910	4030016930	S.CER	C1005 JB 1A 104K-T	B	73.5/43.3
C911	4550007730	S.TAN	TEESVJ 0J 106M8R	B	75.4/42.3
Eqv.	4550008380	S.TAN	TMCJ0J106MTRF		
C912	4030018910	S.CER	C1608 JB 0J 475K-T	T	78.8/39.5
C913	4030016930	S.CER	C1005 JB 1A 104K-T	T	80.1/40.2
C915	4030016930	S.CER	C1005 JB 1A 104K-T	B	71.5/37.8
C916	4550007730	S.TAN	TEESVJ 0J 106M8R	B	73.5/38.4
Eqv.	4550008380	S.TAN	TMCJ0J106MTRF		
C917	4030016930	S.CER	C1005 JB 1A 104K-T	B	72.4/37.8
C918	4030016790	S.CER	C1005 JB 1E 103K-T	B	70.4/45.3
C919	4030018860	S.CER	C1005 JB 0J 105K-T	T	81.2/44.5
C920	4030016790	S.CER	C1005 JB 1E 103K-T	T	81.2/43.6
C921	4030018910	S.CER	C1608 JB 0J 475K-T	B	79.7/38.9
C922	4030018910	S.CER	C1608 JB 0J 475K-T	B	79.7/40.1
C923	4030016790	S.CER	C1005 JB 1E 103K-T	B	90.0/30.9
C927	4030018860	S.CER	C1005 JB 0J 105K-T	B	74.2/22.8
C928	4030018860	S.CER	C1005 JB 0J 105K-T	B	79.0/29.7
C930	4030018860	S.CER	C1005 JB 0J 105K-T	B	71.8/22.9
C931	4030018860	S.CER	C1005 JB 0J 105K-T	B	86.7/41.3
C935	4030016790	S.CER	C1005 JB 1E 103K-T	B	90.2/38.4
C936	4030018860	S.CER	C1005 JB 0J 105K-T	B	90.3/39.3
C937	4030016790	S.CER	C1005 JB 1E 103K-T	B	88.0/30.4
C940	4030018910	S.CER	C1608 JB 0J 475K-T	B	83.2/43.6
C941	4030016930	S.CER	C1005 JB 1A 104K-T	T	83.3/43.6
C942	4030016930	S.CER	C1005 JB 1A 104K-T	B	92.3/41.2
C943	4030016790	S.CER	C1005 JB 1E 103K-T	B	87.7/41.3
C944	4030016930	S.CER	C1005 JB 1A 104K-T	B	76.6/43.1
C945	4030016930	S.CER	C1005 JB 1A 104K-T	B	72.3/45.2
C946	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.5/48.4
C947	4030016930	S.CER	C1005 JB 1A 104K-T	T	83.1/29.8
C948	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.1/44.0
C949	4030017420	S.CER	C1005 CH 1H 470J-T	B	72.3/44.3
C950	4030017620	S.CER	C1005 CH 1H 100C-T	B	77.8/48.6
C951	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.0/46.9
C953	4030017460	S.CER	C1005 JB 1H 102K-T	B	80.5/48.6
C954	4030016790	S.CER	C1005 JB 1E 103K-T	B	82.3/48.6
C955	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.7/43.8
C956	4030017380	S.CER	C1005 CH 1H 050B-T	B	79.9/42.9
C957	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.7/42.6
C958	4030016930	S.CER	C1005 JB 1A 104K-T	T	68.5/38.2
C960	4030017920	S.CER	C1005 JB 1A 683K-T	B	68.3/35.9
J51	6450000131	CON	HSJ1102-018540		
J52	6450002250	CON	HSJ1456-010320		
J53	6510021901	S.CON	BM02B-ASRS-TF(LF)(SN)	T	27.2/34.5
F51	5210001160	S.FUS	ERBRE3R00V	T	10.7/37.6
DS51	5040003790	S.LED	SML-522MU8WT86	T	2.0/37.9
MC51	7700002950	MIC	EM9745P-33-G <HOR>		
S51	2260001900	SWI	SW-149 (SKHLLD)		
S52	2260002800	S.SWI	SW-167 (SKQTLAE010)	B	39.2/1.9
S53	2260002800	S.SWI	SW-167 (SKQTLAE010)	B	48.7/1.9
S54	2250000830	ENC	FSR08-0008A <SLVJ>		
EP2	6910018460	S.BEA	MMZ1005Y102C-T	B	32.8/15.5
EP3	6910018460	S.BEA	MMZ1005Y102C-T	B	63.5/21.3
EP4	6910018460	S.BEA	MMZ1005Y102C-T	T	45.2/28.7
EP5	6910018460	S.BEA	MMZ1005Y102C-T	T	41.0/11.0
EP6	6910014730	S.BEA	MPZ2012S331A-T	B	25.2/21.4
EP7	6910021240	S.BEA	MMZ1005A152ET	B	61.1/30.4
EP8	6910021240	S.BEA	MMZ1005A152ET	B	60.9/33.1
EP51	6910018460	S.BEA	MMZ1005Y102C-T	B	19.1/46.2
EP52	6910021240	S.BEA	MMZ1005A152ET	B	96.5/13.0
EP54	6910016330	S.BEA	MMZ1005S 601CT-S	B	69.9/37.2
EP900	6910016330	S.BEA	MMZ1005S 601CT-S	B	71.1/43.9
EP901	6910016330	S.BEA	MMZ1005S 601CT-S	B	76.7/41.9
EP902	6910016330	S.BEA	MMZ1005S 601CT-S	B	74.5/38.1
EP903	6910016330	S.BEA	MMZ1005S 601CT-S	T	83.2/49.7
EP904	6910016330	S.BEA	MMZ1005S 601CT-S	T	94.4/47.0
EP905	6910016330	S.BEA	MMZ1005S 601CT-S	B	84.5/49.8
EP906	6910016330	S.BEA	MMZ1005S 601CT-S	B	93.2/46.9

BOARD LAYOUTS

The combination of top side and bottom side of this page shows the actual configuration of P.C. board.

• MAIN UNIT (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])
(TOP VIEW)

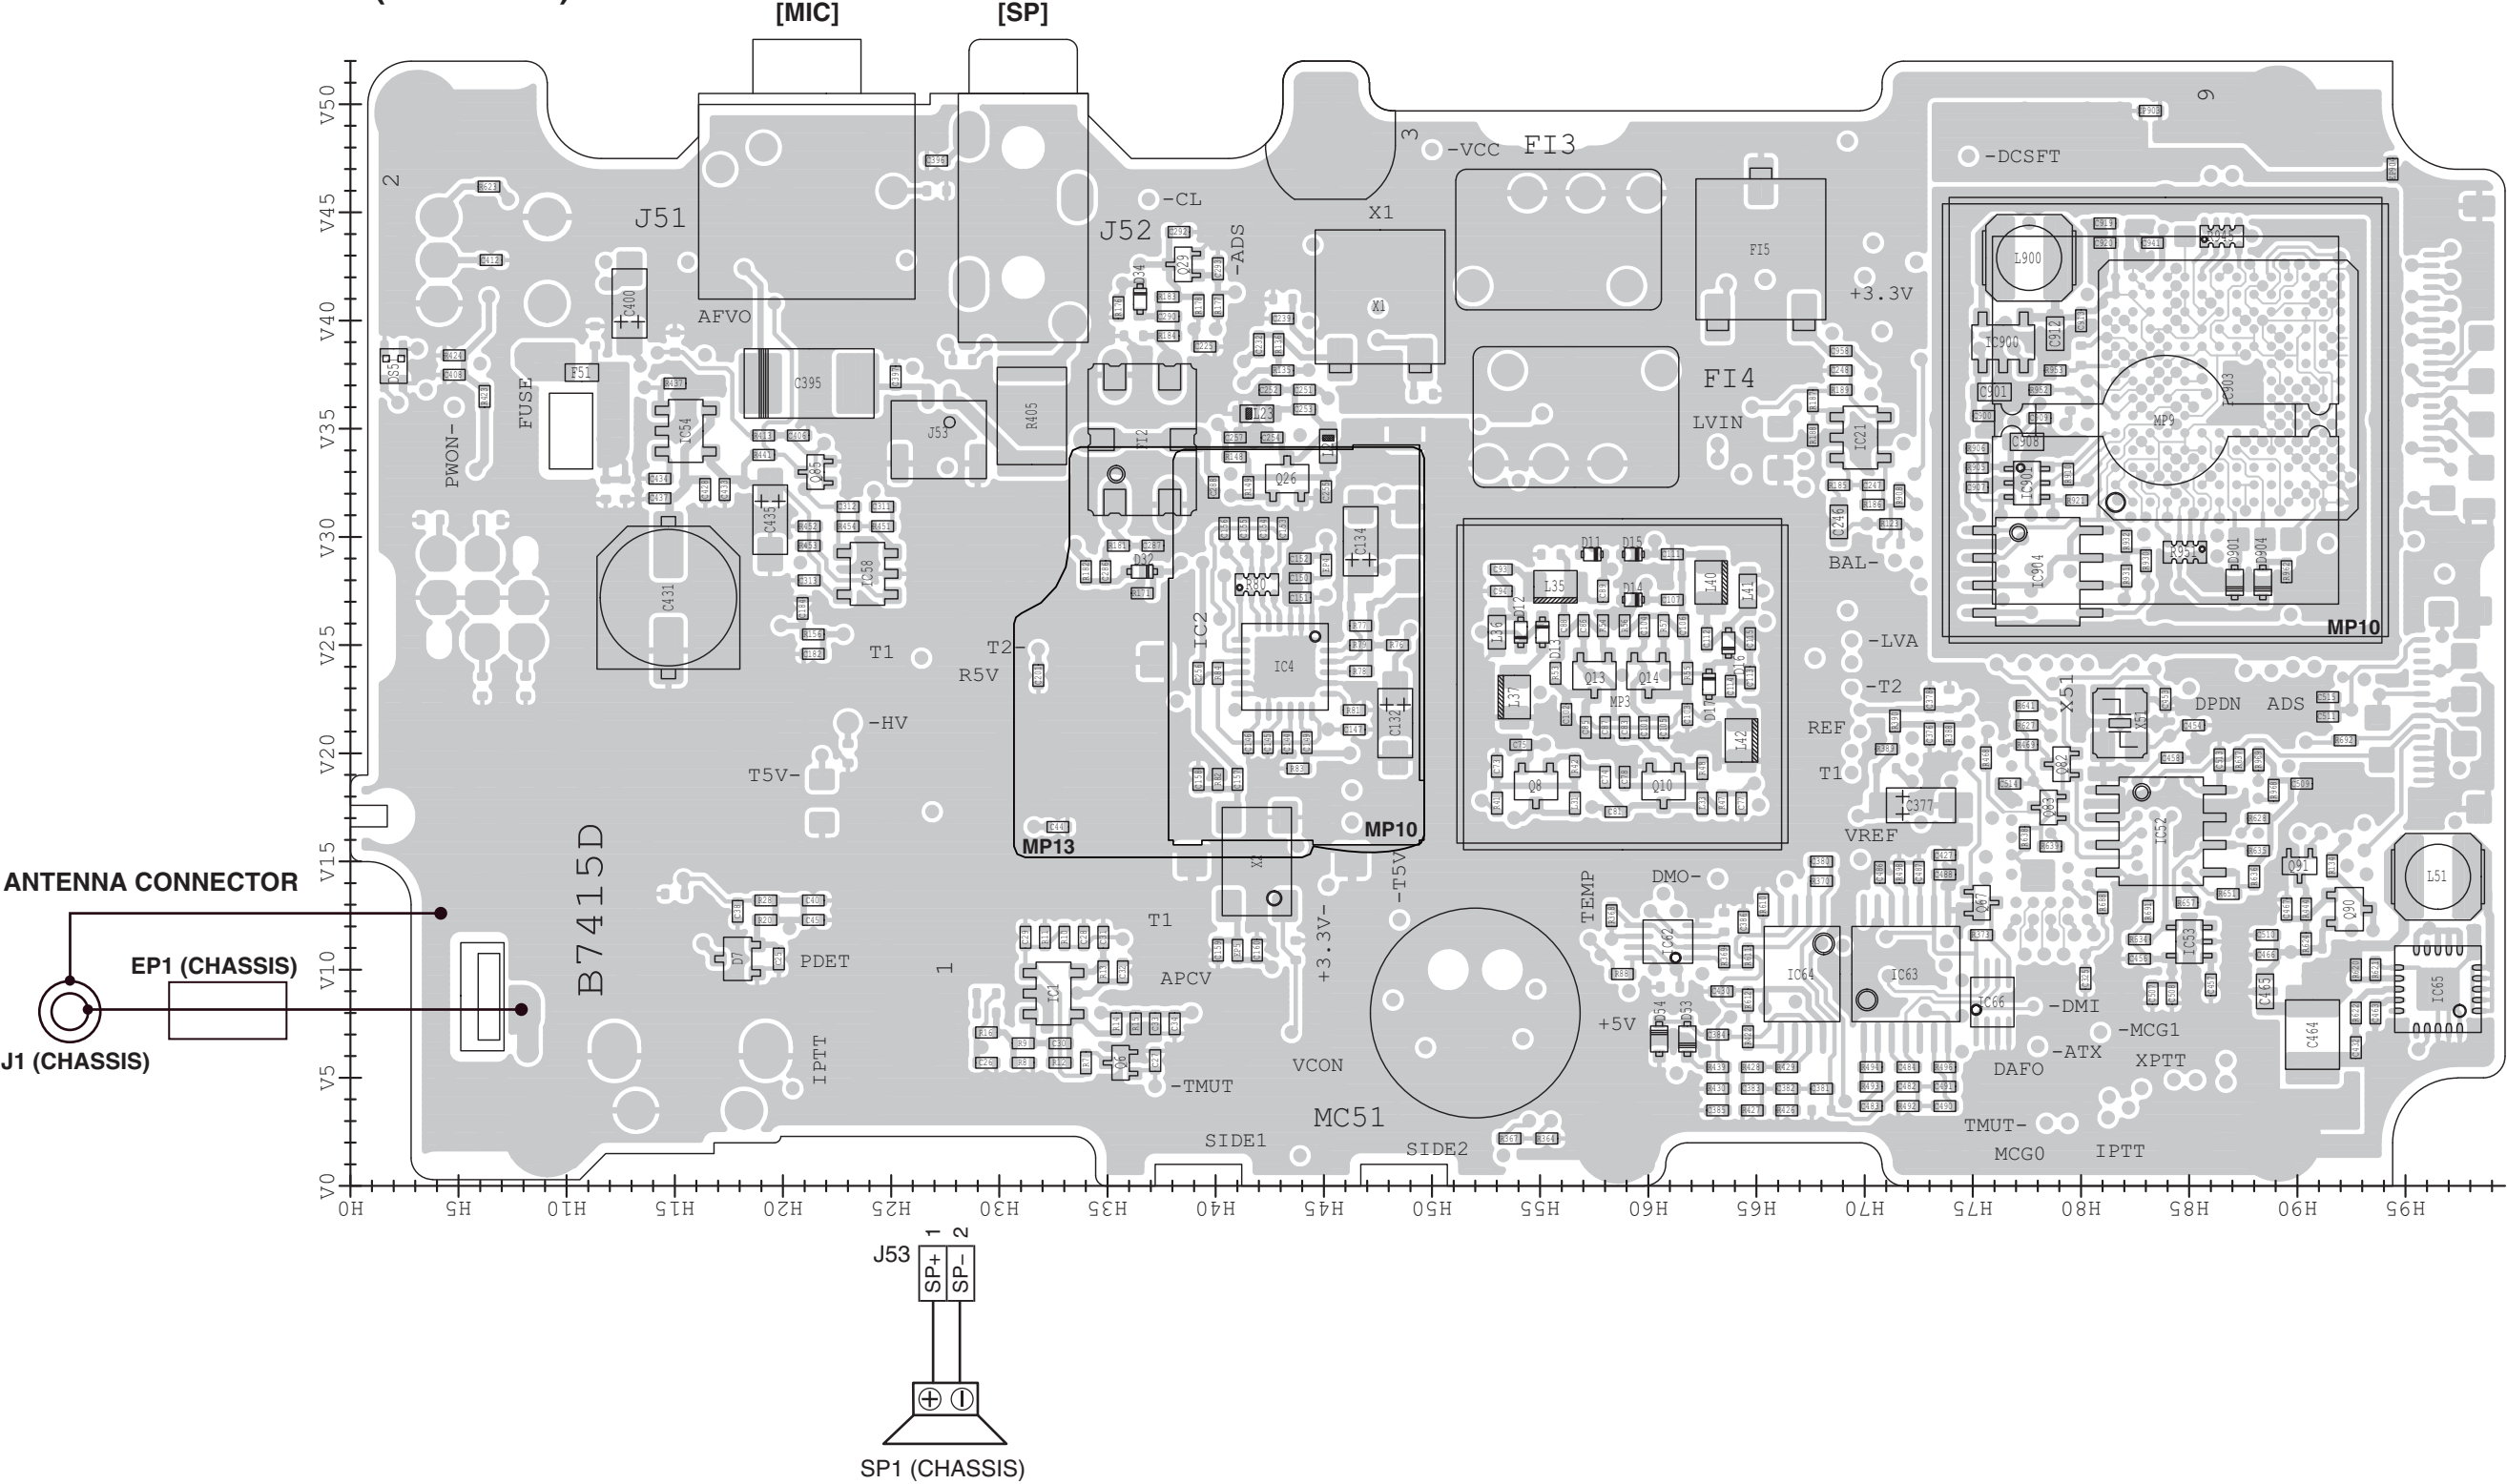

• MAIN UNIT (For [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])
(BOTTOM VIEW)


The schematic illustrates the layout of a radio receiver PCB. The grid shows vertical positions from V0 to V50 and horizontal positions from H0 to H95. Key components and sections include:

- VHF Section:** Located on the left, featuring a VHF B7483C module and associated components like C431, C435, and T1.
- Power Section:** Includes a FUSE, PWON- (power on) switch, and various capacitors (C395, C431, C435) and resistors (R405, R5V).
- ICs and Transistors:** Multiple integrated circuits (IC1-IC10) and transistors (T1-T5) are distributed across the board, often within modules like MP10 and MP13.
- Connectors:** J1 (MIC), J2 (SP), J3 (VCC), J4 (LVA), J5 (SP+/-), and J53 (SP1) are shown.
- Other Components:** A large circular component (likely a speaker or transformer) is labeled MC51. Other components include L900, L901, L902, L903, L904, L905, L906, L907, L908, L909, L910, L911, L912, L913, L914, L915, L916, L917, L918, L919, L920, L921, L922, L923, L924, L925, L926, L927, L928, L929, L930, L931, L932, L933, L934, L935, L936, L937, L938, L939, L940, L941, L942, L943, L944, L945, L946, L947, L948, L949, L950, L951, L952, L953, L954, L955, L956, L957, L958, L959, L960, L961, L962, L963, L964, L965, L966, L967, L968, L969, L970, L971, L972, L973, L974, L975, L976, L977, L978, L979, L980, L981, L982, L983, L984, L985, L986, L987, L988, L989, L990, L991, L992, L993, L994, L995, L996, L997, L998, L999, L1000.


A detailed inset on the right shows the internal components of the MP10 module, including IC901, IC902, IC903, IC904, IC905, IC906, IC907, IC908, IC909, IC910, IC911, IC912, IC913, IC914, IC915, IC916, IC917, IC918, IC919, IC920, IC921, IC922, IC923, IC924, IC925, IC926, IC927, IC928, IC929, IC930, IC931, IC932, IC933, IC934, IC935, IC936, IC937, IC938, IC939, IC940, IC941, IC942, IC943, IC944, IC945, IC946, IC947, IC948, IC949, IC950, IC951, IC952, IC953, IC954, IC955, IC956, IC957, IC958, IC959, IC960, IC961, IC962, IC963, IC964, IC965, IC966, IC967, IC968, IC969, IC970, IC971, IC972, IC973, IC974, IC975, IC976, IC977, IC978, IC979, IC980, IC981, IC982, IC983, IC984, IC985, IC986, IC987, IC988, IC989, IC990, IC991, IC992, IC993, IC994, IC995, IC996, IC997, IC998, IC999, IC1000.

A separate diagram at the bottom shows the SP1 connector and its connection to the chassis.


• MAIN-A UNIT (Other than [#01], [#05], [#06], [#11], [#12], [#15], [#16], [#17])
(BOTTOM VIEW)

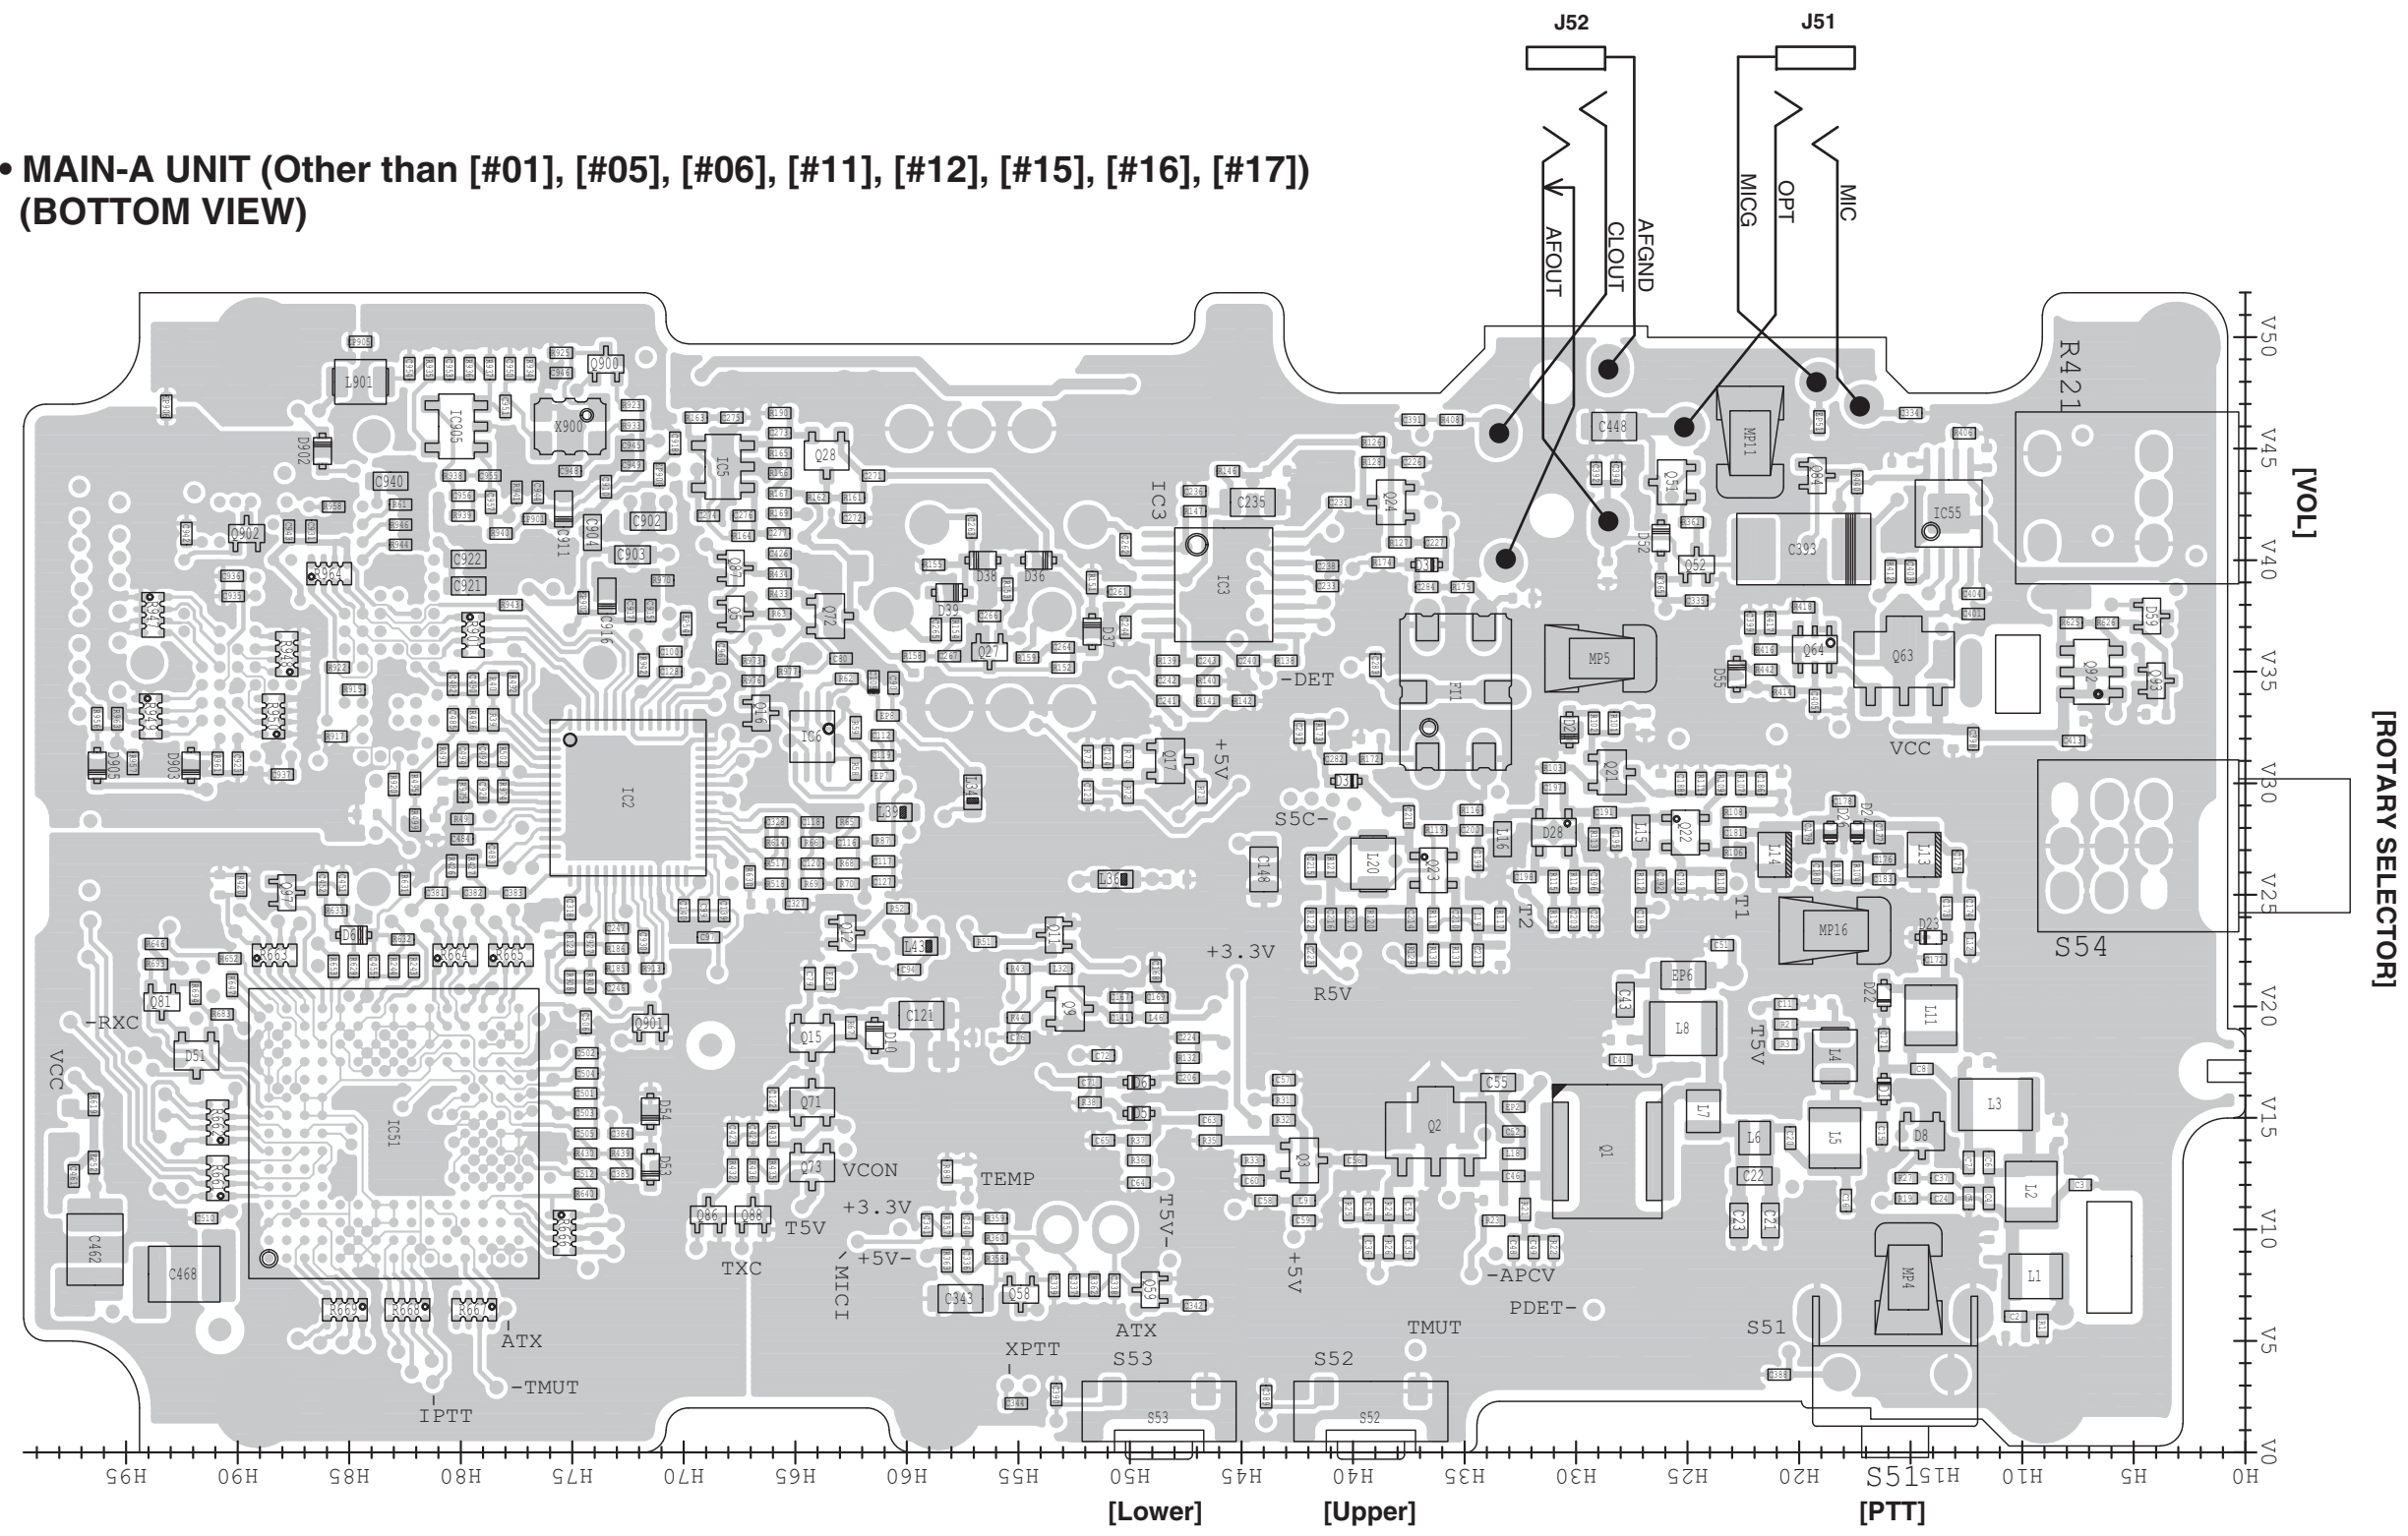


BLOCK DIAGRAM

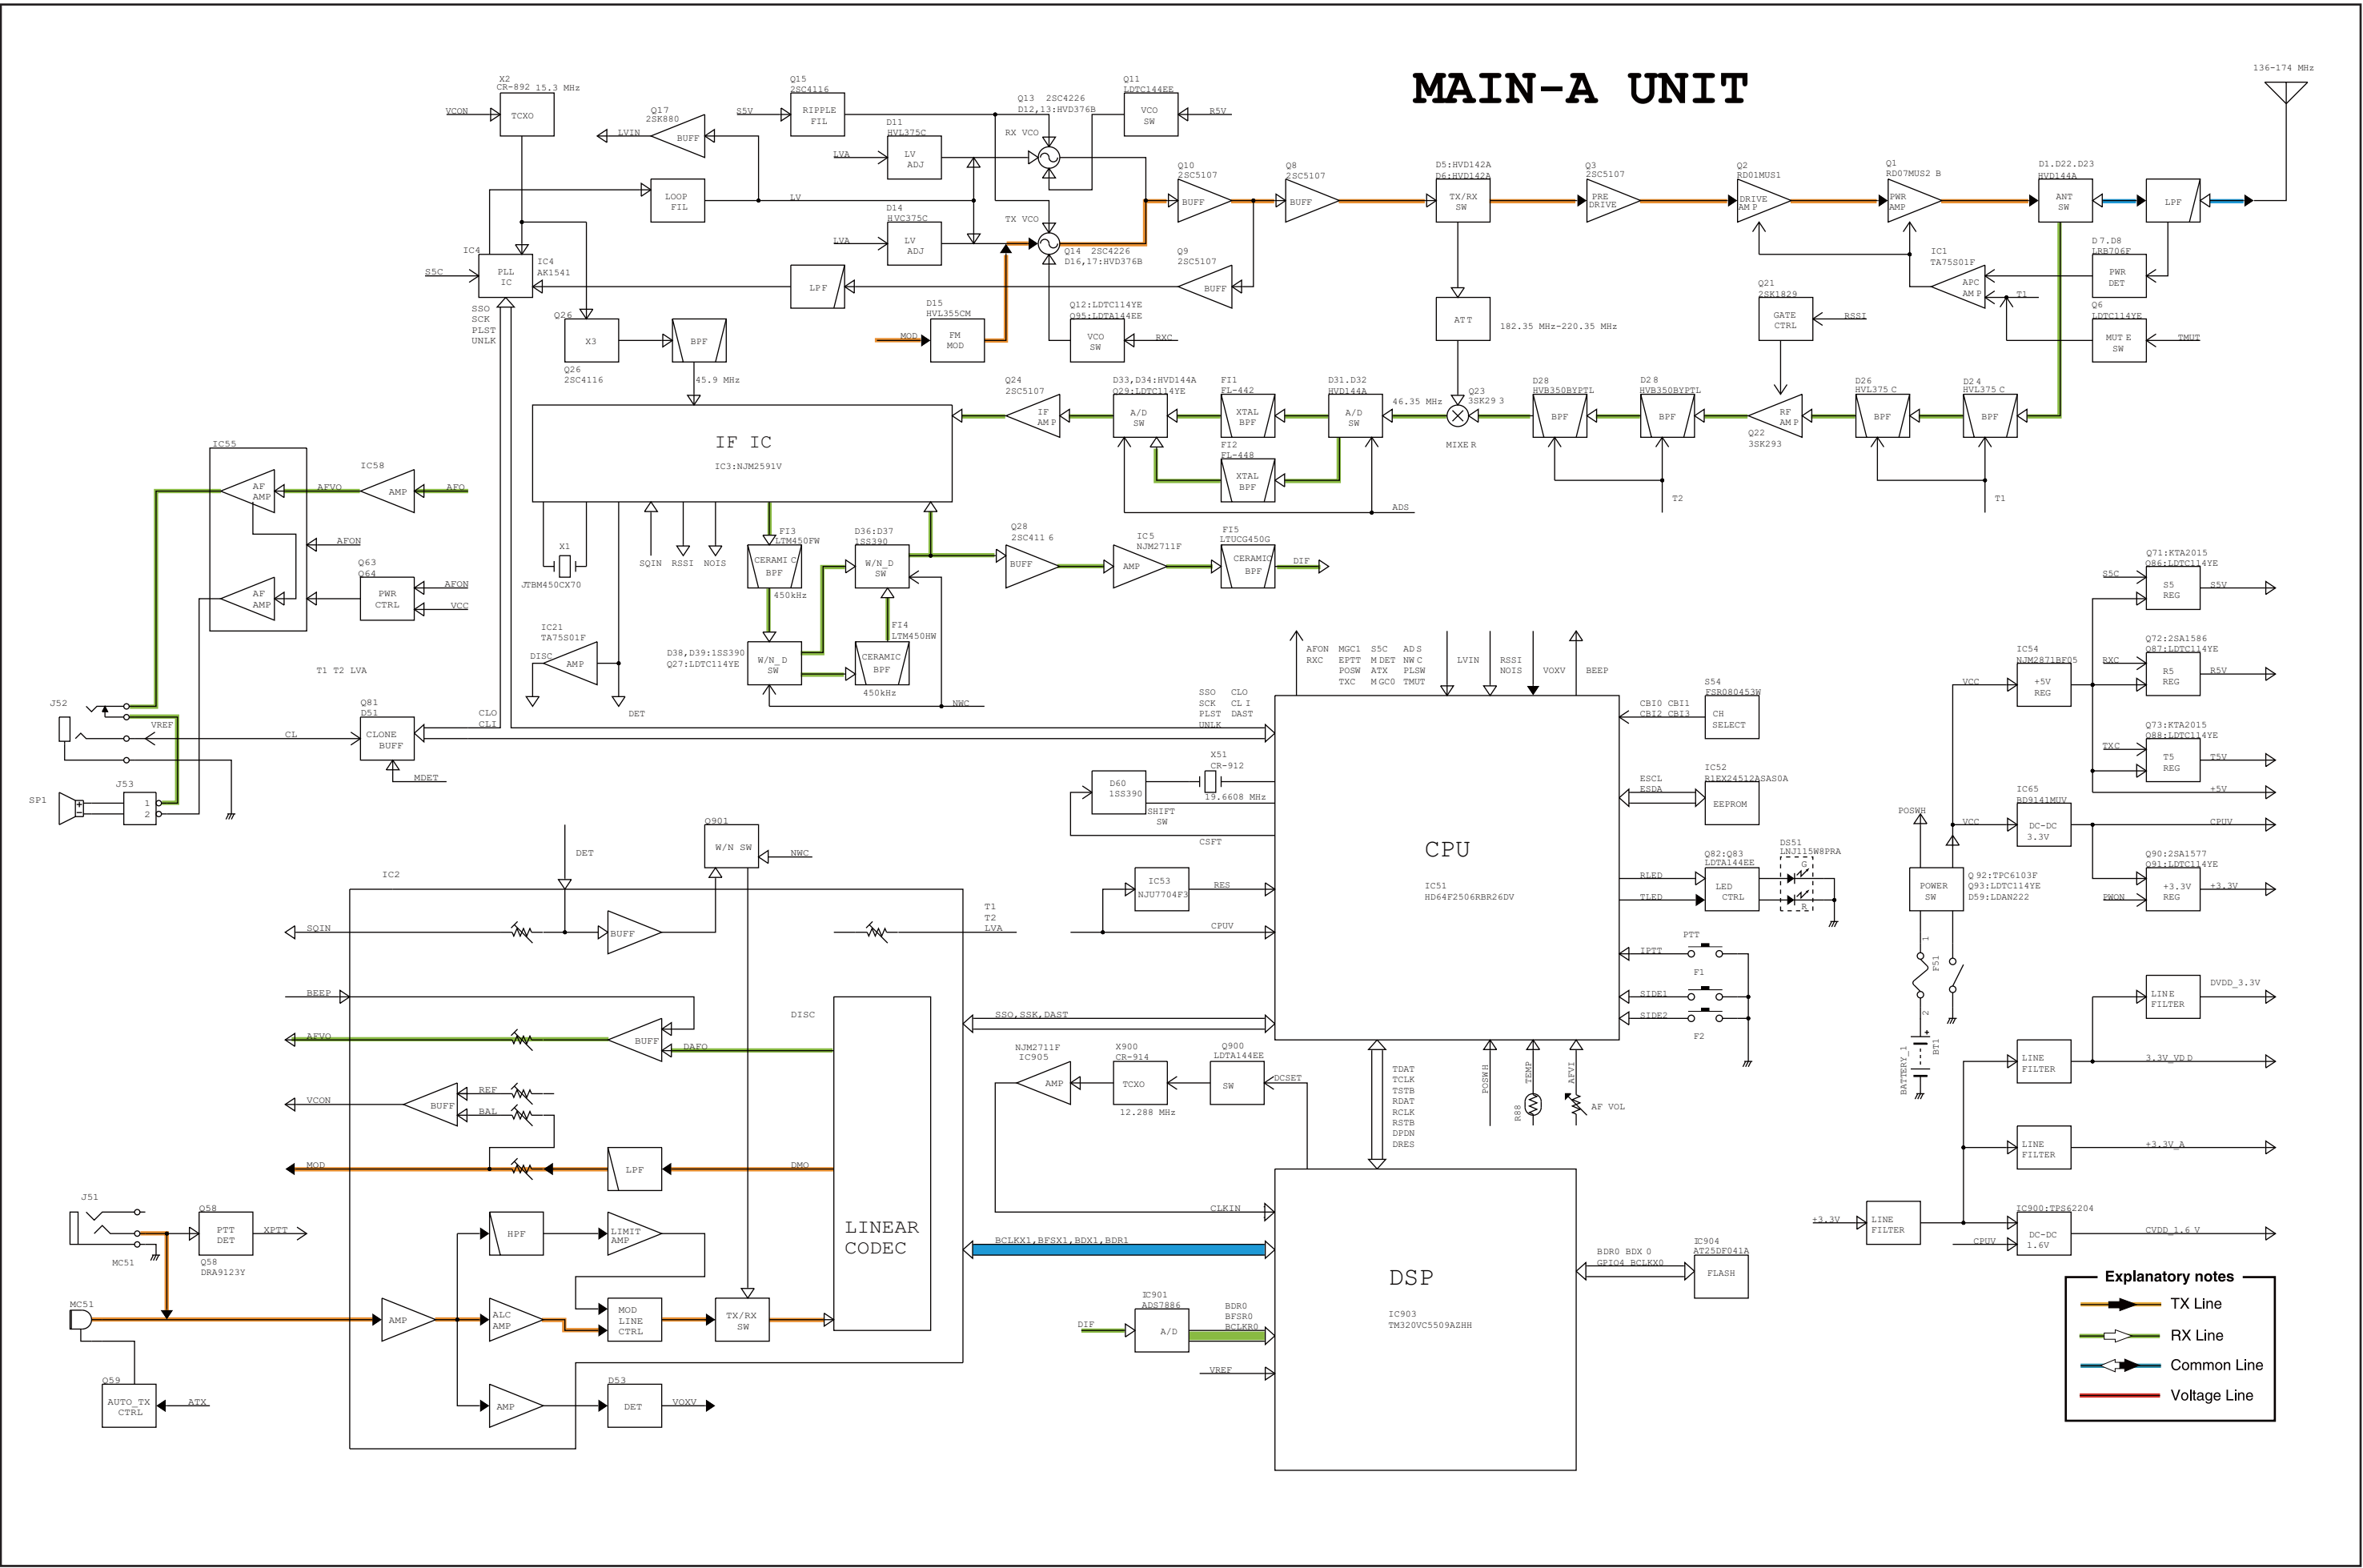

• MAIN UNIT (3/3)

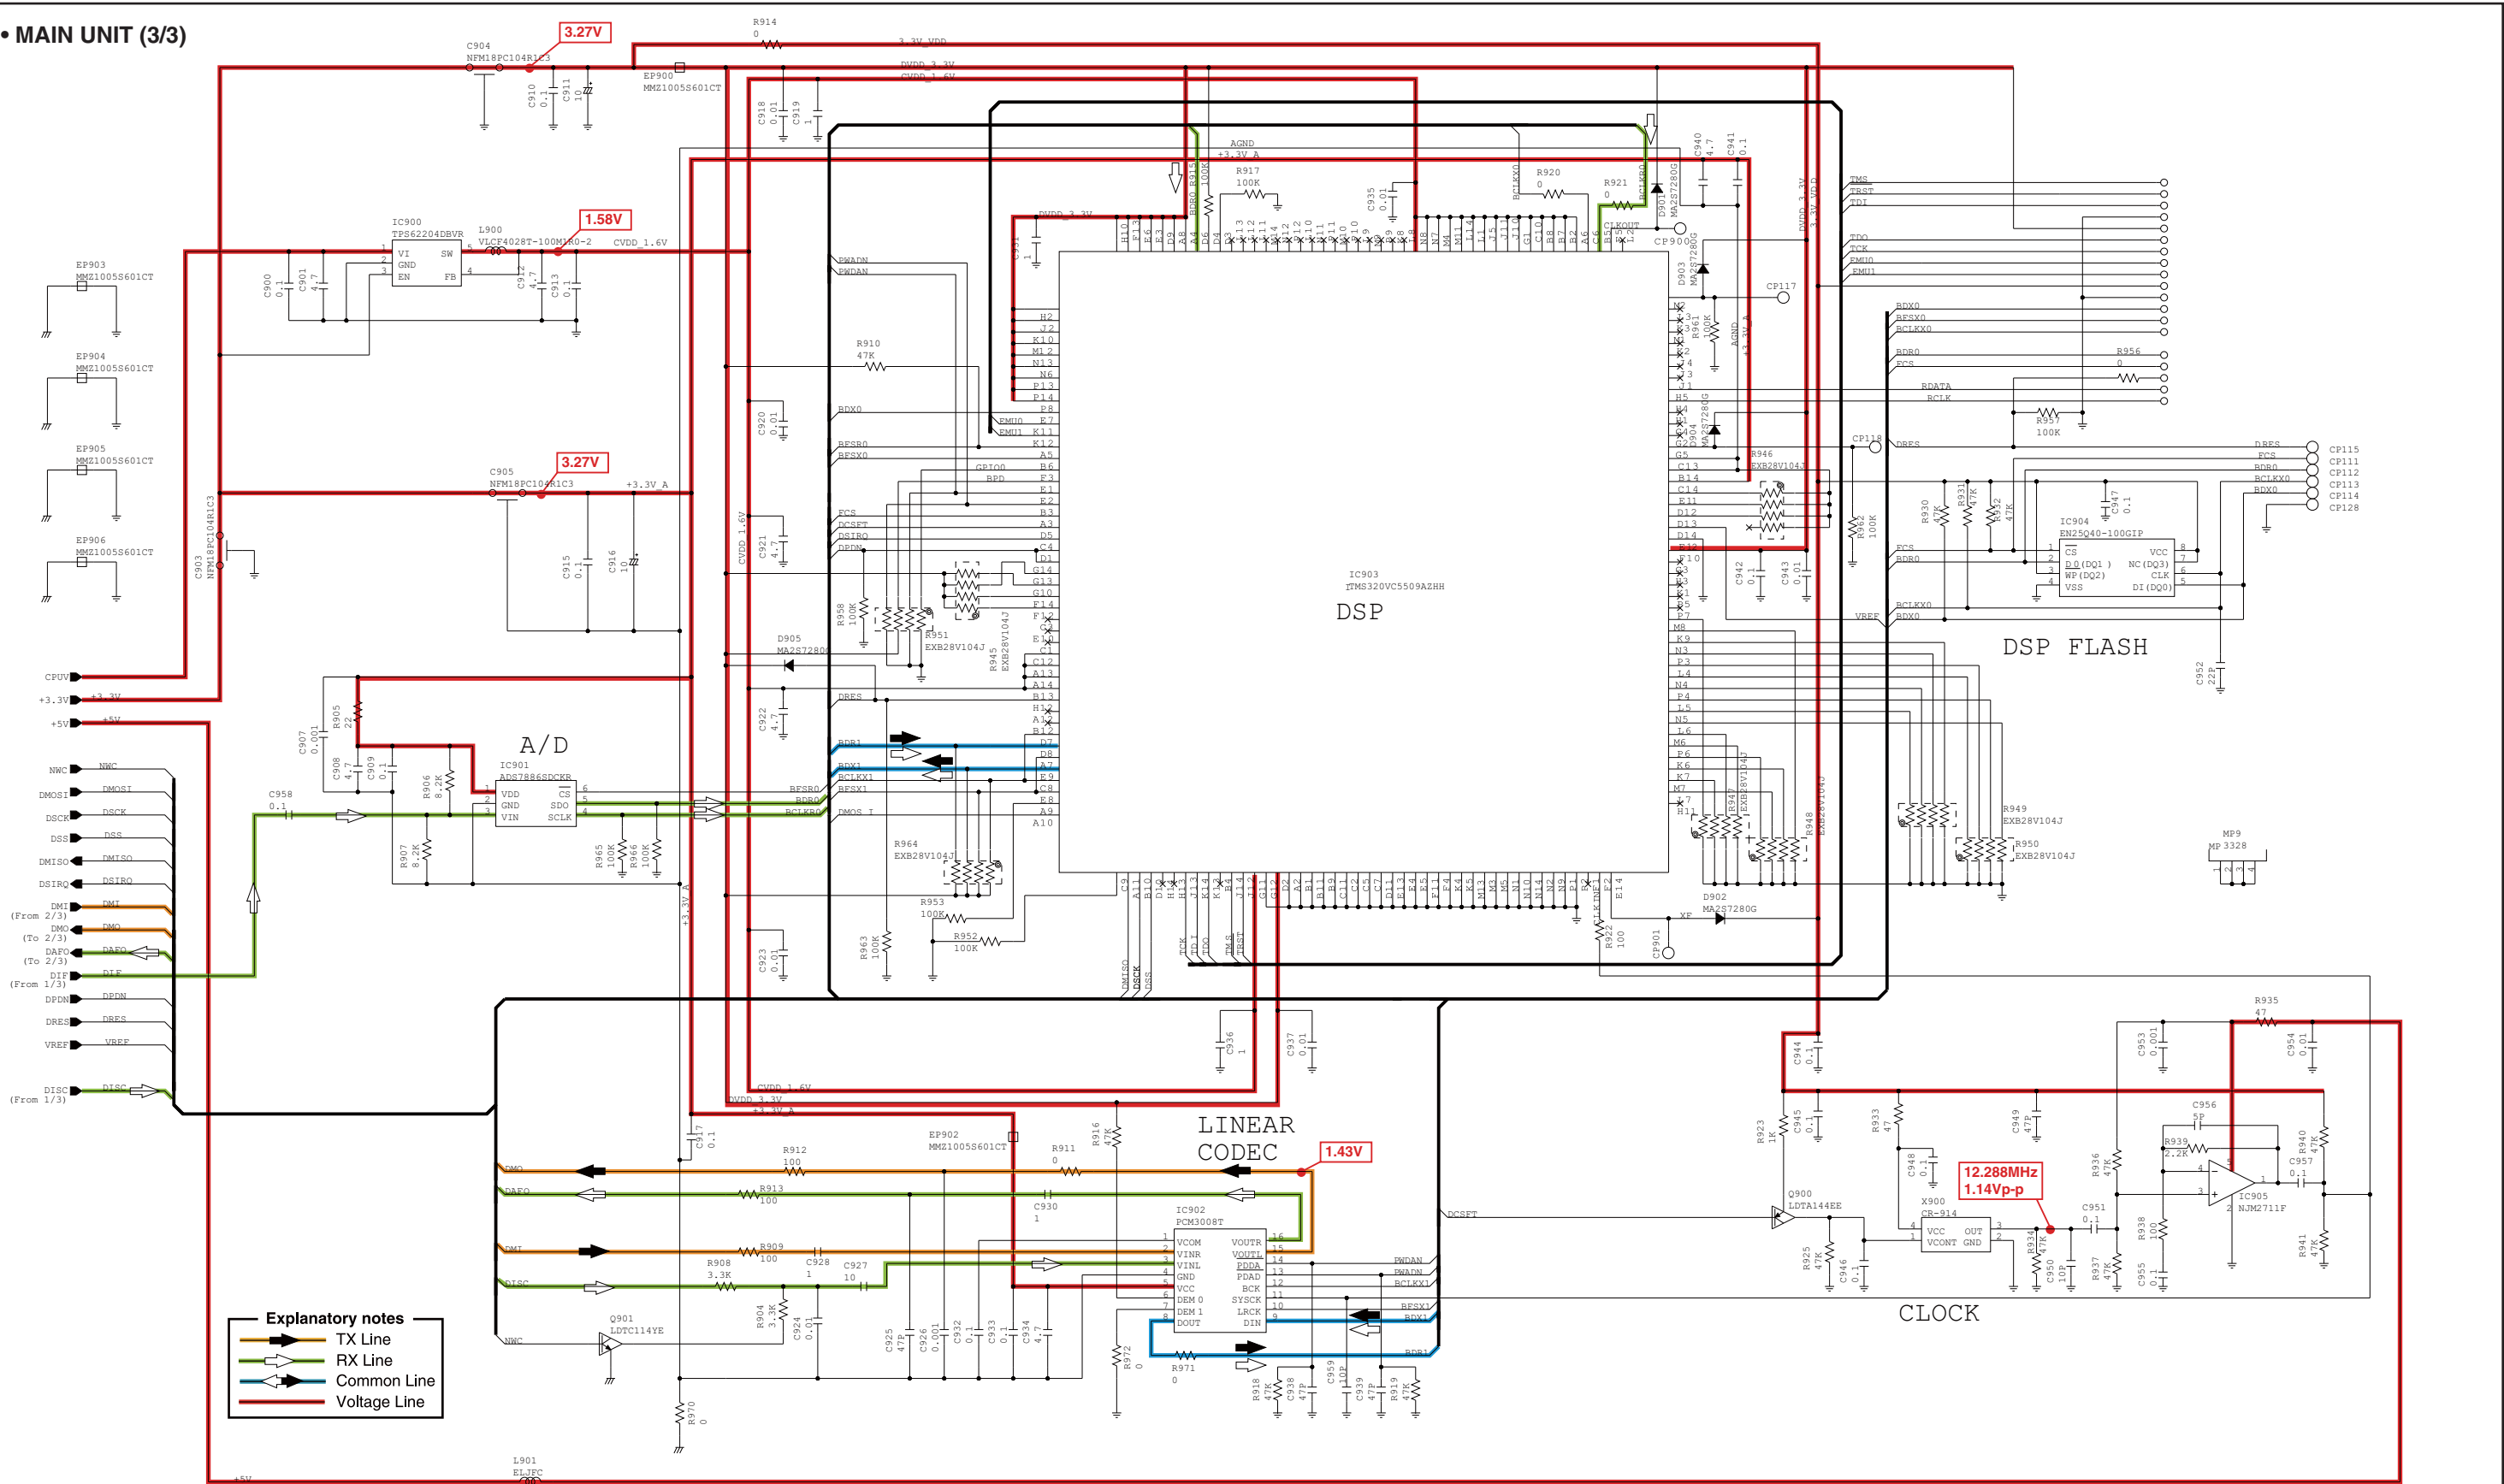


*: Refer to the PARTS LIST for the value and name of component.





• MAIN-A UNIT (3/3)

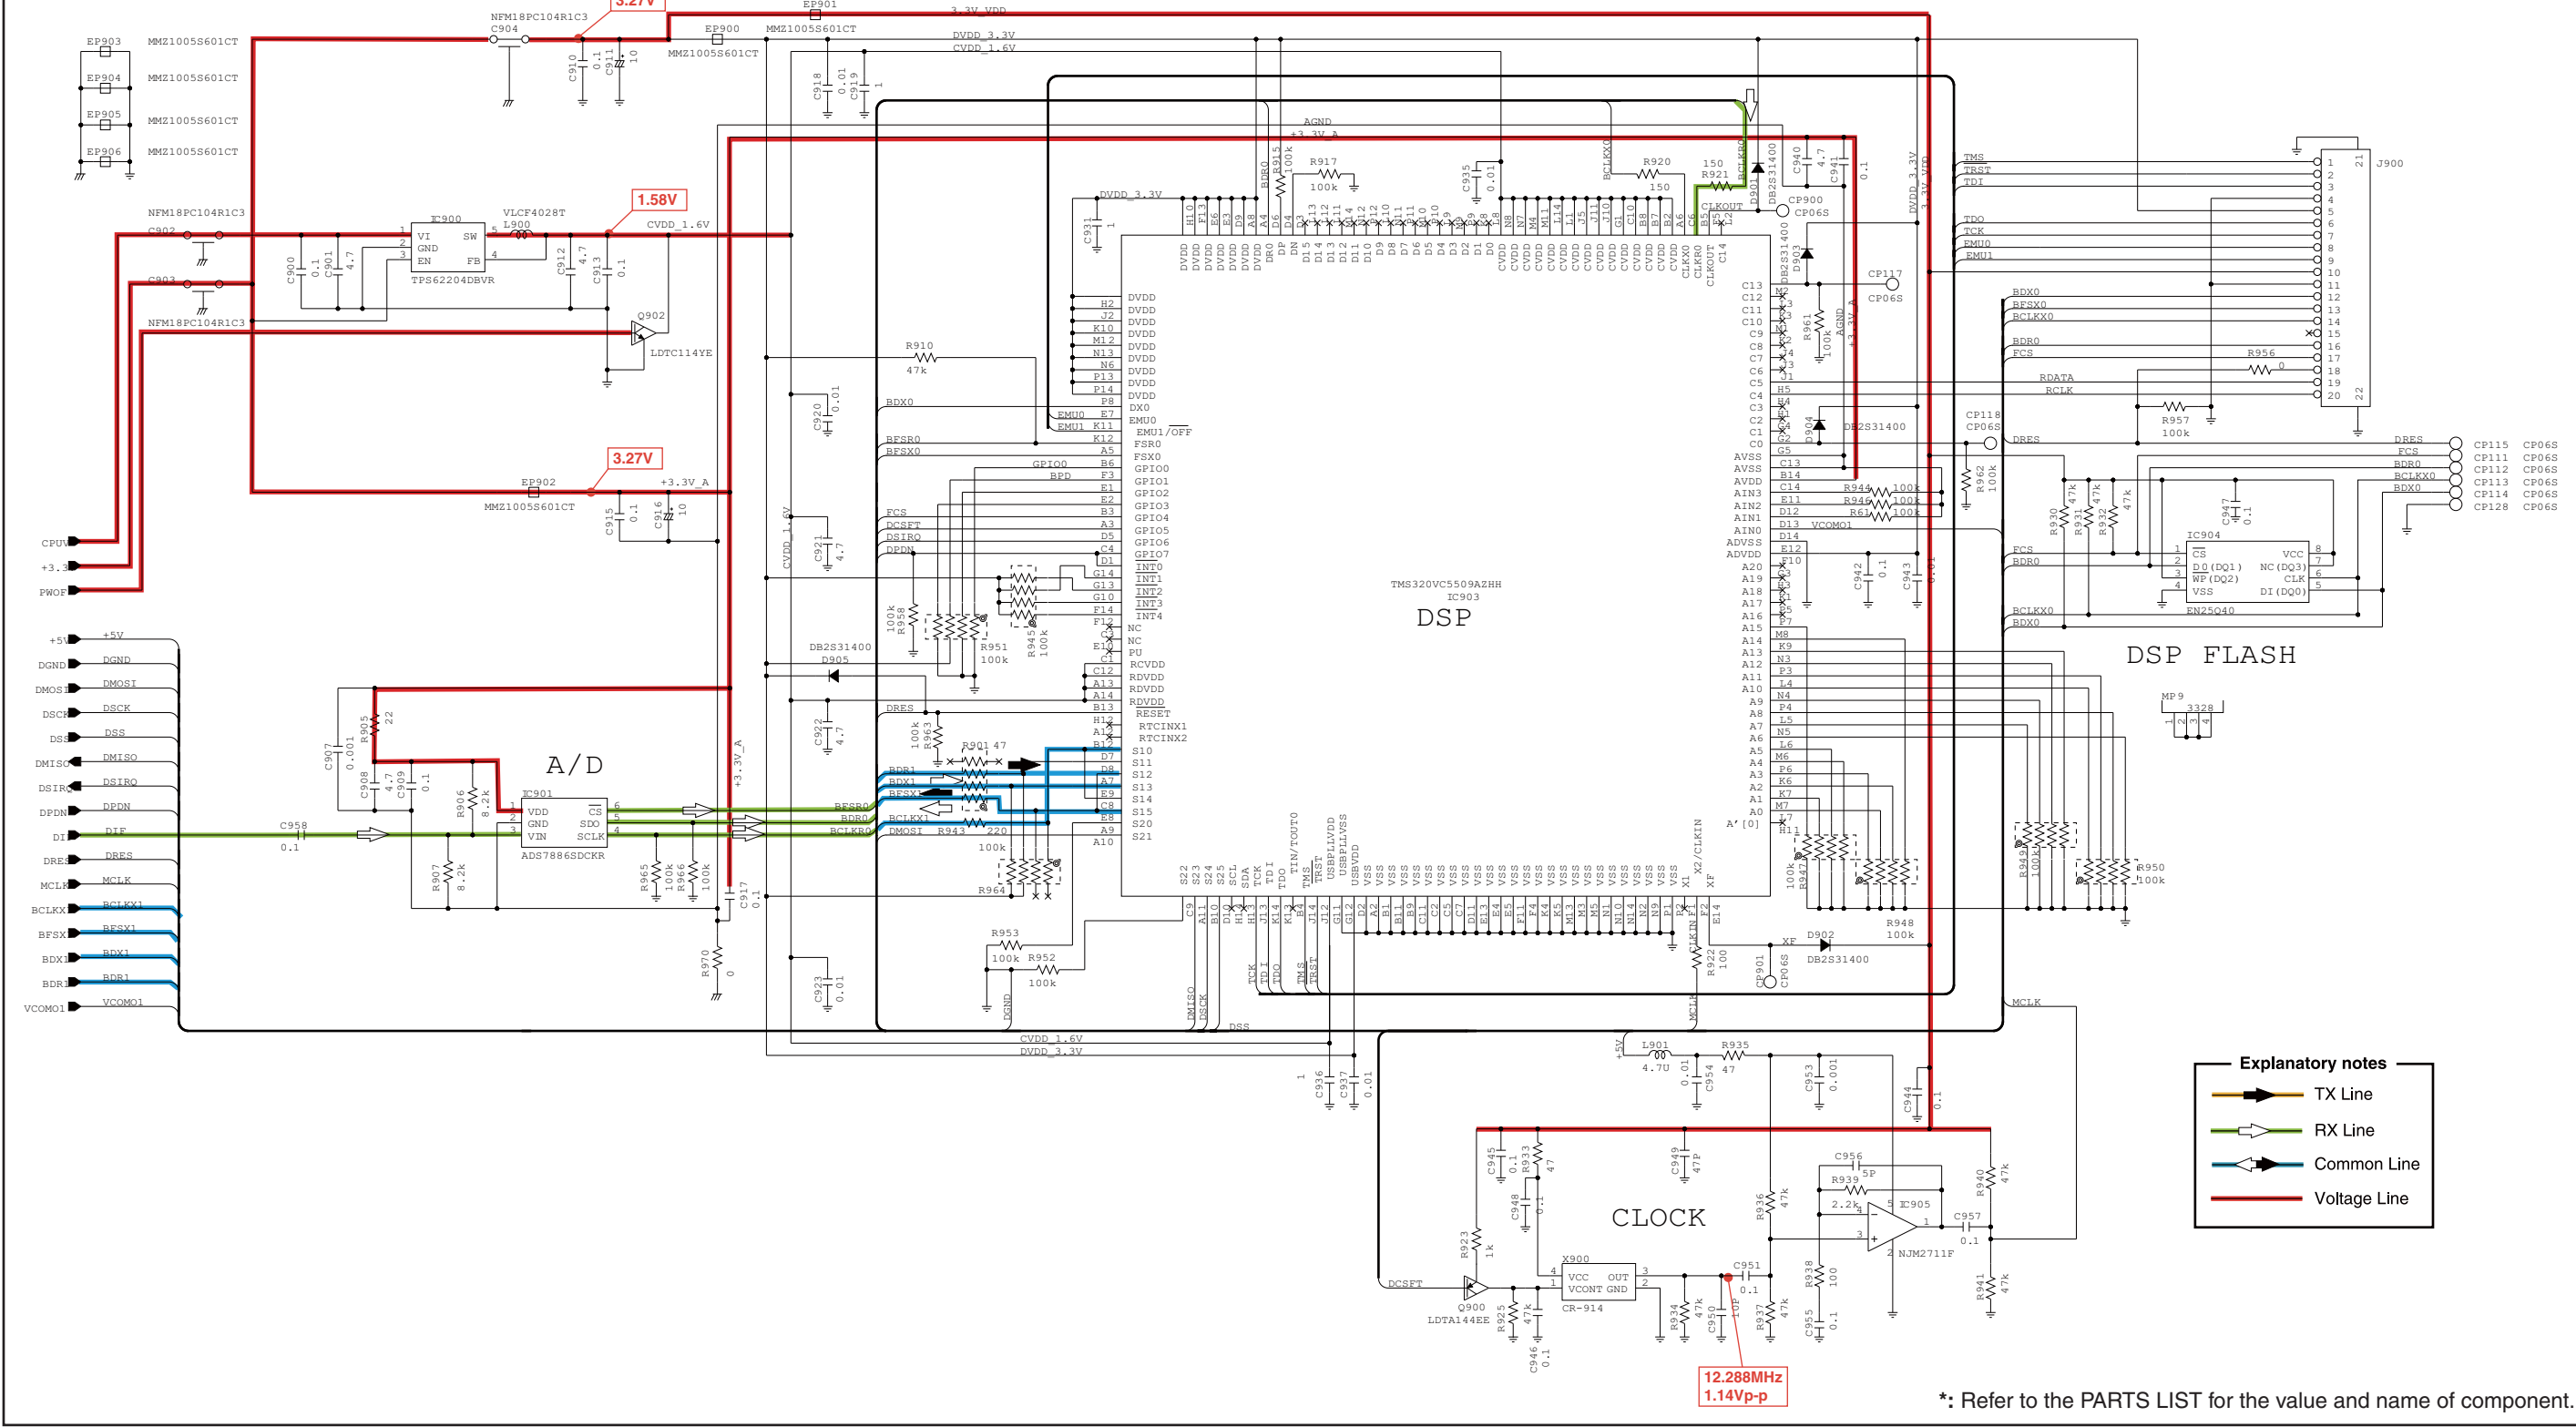

Jun. 2012



SERVICE MANUAL ADDENDUM

IC-F3100D series

CONTENTS

REPLACEMENT PAGE	5-6
PARTS LIST	1
VOLTAGE DIAGRAM	6

5-4 RECEIVE ADJUSTMENTS

1) Select an adjustment item using [\uparrow]/[\downarrow] on the PC's keyboard.

2) Set or modify the adjustment value as specified using [\leftarrow]/[\rightarrow] on the PC's keyboard, then push [ENTER].

ADJUSTMENT	TRANSCIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
SENSITIVITY (For only IC-F3102D)	NOTE: "RECEIVE SENSITIVITY" must be adjusted before "S-METER." Otherwise, "S-METER" will not be adjusted properly. When "RECEIVE SENSITIVITY" is re-adjusted, "S-METER" must be also re-adjusted.			
	1	• Channel : 1-15 • Receiving	• Connect an SSG to the antenna connector and set it as; Frequency : 136 MHz Level† : +20 dBμ (−87 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz	[BPF C ALL] Push [ENTER] (Automatic adjustment)
	2			[BPFT1 C] 70
S-METER	1	• Channel : 1-15 • Receiving	• Connect an SSG to the antenna connector and set it as; Frequency : 136 MHz Level† : +23 dBμ (−84 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz	[RSSI S3 Level] Push [ENTER] (Automatic adjustment)
	2	• Channel : 1-15 • Receiving	• Set the SSG as; Level† : −7 dBμ (−114 dBm)	[RSSI S1 Level]
SQUELCH	1	• Channel : 1-15 • Receiving	1) Connect an SSG to the antenna connector and set it as; Frequency : 136 MHz Level† : −13 dBμ (−120 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz 2) Once close the squelch by increasing [SQL] value, and then decrease the value to open the squelch.	[SQL] Squelch opens (Push [ENTER] to store the value)

†; The output level of the standard signal generator (SSG) is indicated as the SSG's open circuit.

PARTS LIST

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
IC3	1110007320	S.IC NJM2591V-TE1-#ZZZB	B	45.8/38.9
IC4	1130015271	S.IC AK1541P4-L	T	43.2/24.0
IC5	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	68.3/44.2
IC6	1130011741	S.IC TC7W66FK(TE85LF)	B	65.3/26.7
IC21	1110002751	S.IC TA75S01F(TE85RF)	T	69.8/34.6
IC51	1140015010	S.IC HD64F2506RBR26DV(EMPTY)	B	83.0/14.3
IC52	1130015080	S.IC R1EX24512ASAS0A	T	83.7/16.4
IC53	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	T	85.0/11.3
IC54	1180003600	S.REG NJM2871BF05-TE1-#ZZZB	T	15.5/34.9
IC55	1110007610	S.IC TPA0211DGNR	B	13.3/42.1
IC57	1110007290	S.IC AK2330P-L	B	72.3/24.5
IC58	1110002751	S.IC TA75S01F(TE85RF)	T	23.9/28.3
IC60	1110005320	S.IC NJM13403V-TE1-#ZZZB	B	65.1/8.3
IC62	1130011741	S.IC TC7W66FK(TE85LF)	T	60.9/11.3
IC63	1110007630	S.IC NJM2783V-TE1-#ZZZH	T	71.9/9.8
IC64	1110005330	S.IC NJM12904V-TE1-#ZZZB	T	67.1/9.8
IC65	1180003670	S.REG BD9141MUV-E2	T	96.5/9.1
IC66	1130009981	S.IC TC7W53FK(TE85LF)	T	75.9/8.5
IC900	1180003680	S.REG TPS62204DBVR	T	76.4/39.0
IC901	1190002900	S.IC ADS7886SDCKR	T	77.5/32.5
IC902	1110007770	S.IC PCM3008T/2K	B	78.6/34.7
IC903	1140013290	S.IC TMS320VC5509AZHH <FE>	T	86.8/36.8
IC904	1130015620	S.IC EN25Q40-100GIP <MSK>	T	78.0/28.4
IC905	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	80.2/46.0
Q1	1560001700	S.FET RD07MUS2B-T112	B	28.6/13.5
Q2	1560001241	S.FET RD01MUS1-T113	B	36.3/14.4
Q3	1530003311	S.TRA 2SC5107-O(TE85RF)	B	42.2/13.1
Q6	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	35.6/5.7
Q8	1530003311	S.TRA 2SC5107-O(TE85RF)	T	54.8/18.5
Q9	1530003311	S.TRA 2SC5107-O(TE85RF)	B	55.9/18.5
Q10	1530003311	S.TRA 2SC5107-O(TE85RF)	T	60.7/18.5
Q11	1590004070	S.TRA LDTCT114EET1G <SLVJ>	B	54.9/23.8
Q12	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	62.5/23.3
Q13	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	57.5/23.6
Q14	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	60.0/23.6
Q15	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	64.2/18.7
Q16	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	68.2/21.9
Q17	1560000541	S.FET 2SK880-Y(T5R1COMF)	B	50.9/29.7
Q21	1560000841	S.FET 2SK1829(TE85RF)	B	28.4/30.5
Q22	1580000731	S.FET 3SK293(TE85LF)	B	25.1/27.8
Q23	1580000731	S.FET 3SK293(TE85LF)	B	36.4/26.1
Q24	1530003311	S.TRA 2SC5107-O(TE85RF)	B	38.3/42.6
Q26	1530002851	S.TRA 2SC4116-BL(TE85RF)	T	43.3/32.7
Q27	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	56.3/35.9
Q28	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	63.6/44.7
Q29	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	38.5/42.6
Q51	1510001090	S.TRA KTA2015Y-RTK/P	B	25.7/43.5
Q52	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	24.6/39.8
Q58	1590004220	S.TRA DRA9123YOL	B	54.9/7.1
Q59	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	49.1/7.3
Q63	1520000460	S.TRA 2SB1132 T100 R	B	15.3/35.5
Eqv.	1520000910	S.TRA 2SB1132L-R-AB3-R <SLVJ>		
Q64	1590004590	S.TRA DMC506010R	B	19.3/36.0
Q67	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	75.4/13.1
Q71	1510001090	S.TRA KTA2015Y-RTK/P	B	66.9/16.6
Q72	1510000771	S.TRA 2SA1586-GR(TE85LF)	B	65.8/37.4
Q73	1510001090	S.TRA KTA2015Y-RTK/P	B	70.2/12.5
Q81	1590004100	S.TRA LDTCT114YET1G <SLVJ>	B	93.4/20.3
Q82	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	79.1/19.5
Q83	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	78.5/17.5
Q84	1590004070	S.TRA LDTCT114EET1G <SLVJ>	B	19.2/43.8
Q85	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	21.5/33.0
Q86	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	70.6/16.3
Q87	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	68.5/35.7
Q88	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	72.5/12.3
Q90	1510000920	S.TRA 2SA1577 T106 Q	T	92.4/12.8
Q91	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	90.1/14.8
Q92	1590003321	S.FET TPC6103(TE85LF)	B	6.9/35.0
Q93	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	4.0/34.6
Q95	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	68.5/33.2
Q900	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	73.5/48.8
Q901	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	75.1/27.8
D1	1750001910	S.DIO HVD144AKRF-E	B	16.2/16.3
D5	1750001890	S.DIO HVD142AKRF-E	B	49.6/15.2
D6	1750001890	S.DIO HVD142AKRF-E	B	49.6/16.6
D7	1750001820	S.DIO LRB706F-40T1G <SLVJ>	T	17.9/10.5
D8	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	14.5/14.2
D10	1750002170	S.DIO DB2S31400L	B	63.1/16.7
D11	1750001880	S.VAR HVL375CKRF-E	T	57.4/29.2
D12	1750001550	S.VAR HVD376BKRF-E	T	54.1/25.6
D13	1750001550	S.VAR HVD376BKRF-E	T	55.1/25.6
D14	1750001880	S.VAR HVL375CKRF-E	T	59.3/27.1
D15	1750001570	S.VAR HVL355CMKRF-E	T	59.3/29.2
D16	1750001550	S.VAR HVD376BKRF-E	T	63.7/25.1
D17	1750001550	S.VAR HVD376BKRF-E	T	62.8/23.2
D21	1750001810	S.DIO L1SS400T1G <SLVJ>	B	30.3/32.4
D22	1750001910	S.DIO HVD144AKRF-E	B	16.2/20.5
D23	1750001910	S.DIO HVD144AKRF-E	B	14.1/23.1
D24	1750001880	S.VAR HVL375CKRF-E	B	17.4/27.8
D26	1750001880	S.VAR HVL375CKRF-E	B	18.6/27.8
D28	1750001780	S.VAR HVB350BYPTL-E	B	31.0/27.8
D31	1750001910	S.DIO HVD144AKRF-E	B	40.3/30.1
D32	1750001910	S.DIO HVD144AKRF-E	T	36.6/28.4
D33	1750001910	S.DIO HVD144AKRF-E	B	36.7/39.8

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
D34	1750001910	S.DIO HVD144AKRF-E	T	36.5/41.0
D36	1750000571	S.DIO 1SS381(TPH3F)	B	54.1/40.0
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D37	1750000571	S.DIO 1SS381(TPH3F)	B	51.7/36.8
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D38	1750000571	S.DIO 1SS381(TPH3F)	B	56.6/40.0
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D39	1750000571	S.DIO 1SS381(TPH3F)	B	58.1/38.6
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D51	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	91.9/17.8
D52	1750002170	S.DIO DB2S31400L	B	26.2/41.0
D53	1750001810	S.DIO L1SS400T1G <SLVJ>	T	61.8/6.8
D54	1750001810	S.DIO L1SS400T1G <SLVJ>	T	60.5/6.8
D55	1750001810	S.DIO L1SS400T1G <SLVJ>	B	22.8/34.9
D56	1790001860	S.VAR EZJZOV80010	T	11.3/39.3
D59	1750001850	S.DIO LDAN222T1G <SLVJ>	B	4.2/37.5
D60	1750000571	S.DIO 1SS381(TPH3F)	B	85.0/23.6
Eqv.	1750001700	S.DIO HSC277TRF-E		
Eqv.	1750001790	S.DIO 1SS390 TE61		
Eqv.	1750002480	S.DIO 1SS390 <KMC>		
D901	1750002170	S.DIO DB2S31400L	T	87.1/27.9
D902	1750002170	S.DIO DB2S31400L	B	86.2/44.9
D903	1750002170	S.DIO DB2S31400L	B	92.1/30.8
D904	1750002170	S.DIO DB2S31400L	T	88.4/27.9
D905	1750002170	S.DIO DB2S31400L	B	96.3/30.8
F11	2030000870	S.MON MFT46.3P3 46.350 MHz (FL-442)	B	35.4/34.1
F12	2010002760	S.XTA MFT46.3J 46.350 MHz (FL-448)	T	36.6/34.5
F13	2020002410	CER LTM450FW <JJE>		
F14	2020002570	CER LTM450HW <JJE>		
F15	2020002610	S.CER LTUCG450G <JJE>	T	65.2/43.3
X2	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz [USA-01]	T	41.9/15.0
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [EUR-01]		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [UK-01]		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [EXP-01]		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [EXP-02]		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [AUS-01]		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [RUS-01]		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [CHN-01]		
X51	6050013160	S.XTA CR-912 TSS3225A 19.6608 MHz	T	81.8/21.4
X900	6050013170	S.XTA CR-914 TTS18VSE-A11 12.288 MHz	B	75.1/46.0
L1	6200012780	S.COI 0.30-1.4-6TL 27.2N <COMO>	B	9.4/7.9
L2	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	9.6/11.7
L3	6200012910	S.COI 0.35-1.6-8TL 45.5N <COMO>	B	11.2/15.6
L4	6200002861	S.COI NLV25T-4RTJ	B	18.4/17.8
L5	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	18.4/14.1
L6	6200012390	S.COI 0.30-0.92-3TR 5.8N <COMO>	B	22.0/14.1
L7	6200013010	S.COI 0.30-0.9-5TL 10.3N <COMO>	B	24.3/15.3
L8	6200013100	S.COI 0.45-1.5-5TL 18.3N <COMO>	B	25.2/19.0
L9	6200007871	S.COI ELJRF 39NJFB	B	42.2/11.3
L11	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	14.1/19.6
L12	6200011021	S.COI ELJRF 82NJFB	B	12.4/22.8
L13	6200008090	S.COI LQW2BHN68NJ03L	B	14.4/26.8
L14	6200008090	S.COI LQW2BHN68NJ03L	B	21.1/26.8
L15	6200010910	S.COI LQW18AN56NG00D	B	27.1/27.8
L16	6200010910	S.COI LQW18AN56NG00D	B	33.3/27.5
L18	6200007901	S.COI ELJRF 22NJFB	B	32.8/13.4
L19	6200011011	S.COI ELJRF 68NJFB	B	34.4/23.9
L20	6200004770	S.COI ELJNC RS6J-F	B	39.1/26.4
L23	6200012170	S.COI MLG1608S R18J-T	T	41.9/35.7
L24	6200012170	S.COI MLG1608S R18J-T	T	45.2/34.2
L31	6200011031	S.COI ELJRF R10JFB	T	56.6/17.7
L32	6200011031	S.COI ELJRF R10JFB	B	56.5/20.4
L33	6200011031	S.COI ELJRF R10JFB	T	62.5/17.7
L34	6190002030	S.COI MLG1608S 1R0J-T	B	59.9/28.5
L35	6200008090	S.COI LQW2BHN68NJ03L	T	55.7/27.7
L36	6200003640	S.COI MLF1608E 100K-T	T	53.0/25.6
L37	6200007720	S.COI LQW2BHN33NJ03L	T	53.8/22.6
L38	6190002030	S.COI MLG1608S 1R0J-T	B	50.6/25.7
L39	6190002030	S.COI MLG1608S 1R0J-T	B	60.8/27.0
L40	6200007760	S.COI LQW2BHN82NJ03L	T	62.9/27.9
L41	6200003640	S.COI MLF1608E 100K-T	T	64.6/27.5
L42	6200008090	S.COI LQW2BHN68NJ03L	T	64.3/20.6
L43	6190002030	S.COI MLG1608S 1R0J-T	B	60.0/22.7
L46	6200007881	S.COI ELJRF 33NJFB	B	48.8/20.1
L51	6200014170	S.COI VLFC4028T-4R7N1R5-2	T	96.5/41.3

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
L900	6200014160	S.COI VLCF4028T-100M1R0-2	T	77.6/42.9
L901	6200007830	S.COI ELJFC 4R7K-F	B	84.5/48.0
R1	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	9.1/5.7
R2	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/19.2
R3	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/18.3
R7	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	34.0/5.7
R8	7030005220	S.RES ERJ2GEJ 223 X (22K)	T	31.1/5.7
R9	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	31.1/6.6
R10	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	33.0/11.5
R11	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	32.1/11.5
R12	7030005110	S.RES ERJ2GEJ 224 X (220K)	T	32.8/5.7
R13	7030005530	S.RES ERJ2GEJ 100 X (10)	T	34.8/9.9
R14	7030004980	S.RES ERJ2GEJ 101 X (100)	T	35.4/7.5
R15	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	36.3/7.5
R16	7030010040	S.RES ERJ2GEJ-JPW	T	29.4/7.1
R19	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	15.2/11.4
R20	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/12.3
R21	7030007250	S.RES ERJ2GEJ 220 X (22)	B	32.3/10.9
R22	7030005090	S.RES ERJ2GEJ 472 X (100K)	B	31.0/9.2
R23	7030005040	S.RES ERJ2GEJ 104 X (4.7K)	B	33.7/10.4
R24	7030005590	S.RES ERJ2GEJ 680 X (68)	B	38.4/10.9
R25	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	40.2/10.9
R26	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	38.4/9.2
R27	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	15.2/12.3
R28	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/13.2
R31	7030005530	S.RES ERJ2GEJ 100 X (10)	B	42.2/14.9
R32	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	44.0/14.9
R33	7030004980	S.RES ERJ2GEJ 101 X (100)	B	44.6/13.1
R35	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	46.4/14.0
R36	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.6/13.1
R37	7030004980	S.RES ERJ2GEJ 101 X (100)	B	49.6/14.0
R38	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.8/15.2
R41	7030005530	S.RES ERJ2GEJ 100 X (10)	T	53.0/17.7
R42	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	56.6/19.4
R44	7030005530	S.RES ERJ2GEJ 100 X (10)	B	56.5/21.3
R45	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	57.7/18.6
R47	7030004980	S.RES ERJ2GEJ 101 X (100)	T	63.4/17.7
R48	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	62.5/19.3
R51	7030008370	S.RES ERJ2GEJ 561 X (560)	B	56.5/22.9
R52	7030008370	S.RES ERJ2GEJ 561 X (560)	B	60.8/24.4
R53	7030008340	S.RES RR0510P-182-D (1.8K)	T	55.7/23.7
R54	7030011000	S.RES RR0510P-392-D (3.9K)	T	57.9/25.9
R55	7030008340	S.RES RR0510P-182-D (1.8K)	T	61.8/23.7
R56	7030011000	S.RES RR0510P-392-D (3.9K)	T	58.9/25.9
R57	7030009320	S.RES ERJ2GEJ 4R7 X (4.7)	T	60.7/25.9
R58	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.6/27.2
R59	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	62.6/25.6
R62	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	68.0/27.2
R65	7030005720	S.RES ERJ2GEJ 563 X (56K)	B	64.7/30.9
R66	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	64.7/30.0
R67	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	62.4/18.0
R68	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	63.1/30.9
R69	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	63.1/31.8
R70	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	63.6/28.8
R71	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.1/28.7
R72	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.1/27.9
R73	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	54.6/29.9
R74	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	52.8/29.9
R76	7030004990	S.RES ERJ2GEJ 221 X (220)	T	48.4/25.0
R77	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.9
R78	7030010040	S.RES ERJ2GEJ-JPW	T	46.7/23.8
R79	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.0
R80	7410001130	S.ARR EXB28V102JX	T	41.9/27.8
R81	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	46.4/22.0
R82	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	40.1/18.8
R83	7030004970	S.RES ERJ2GEJ 470 X (47)	T	43.8/19.3
R84	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	40.1/23.7
R87	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	61.5/30.0
R88	7510001730	S.THE ERTJOEP 473J	T	58.8/9.8
R89	7030010080	S.RES ERJ2RHD 1003X (100K)	B	58.3/12.6
R101	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	28.3/32.7
R102	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	29.2/32.7
R103	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	31.0/30.7
R104	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	17.4/26.0
R105	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	18.3/26.0
R106	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	22.9/26.9
R107	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	22.6/30.0
R108	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	22.9/28.7
R109	7030005530	S.RES ERJ2GEJ 100 X (10)	B	23.5/30.0
R110	7030008280	S.RES ERJ2GEJ 271 X (270)	B	23.5/25.6
R111	7030005110	S.RES ERJ2GEJ 224 X (220K)	B	24.4/30.0
R112	7030004970	S.RES ERJ2GEJ 470 X (47)	B	27.1/25.6
R113	7030008370	S.RES ERJ2GEJ 561 X (560)	[USA-01]	29.2/27.5
	7030005000	S.RES ERJ2GEJ 471 X (470)	[EUR-01]	
	7030005000	S.RES ERJ2GEJ 471 X (470)	[UK-01]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[EXP-01]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[EXP-02]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[AUS-01]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[RUS-01]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[CHN-01]	
R114	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	30.1/25.6
R115	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	31.0/25.6
R116	7030005080	S.RES ERJ2GEJ 823 X (82K)	B	34.7/28.8
R117	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	33.4/23.9
R118	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	36.4/23.9
R119	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	36.3/27.9
R120	7030005590	S.RES ERJ2GEJ 680 X (68)	B	39.2/23.9
R121	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.0/26.3
R122	7030004970	S.RES ERJ2GEJ 470 X (47)	B	41.9/23.9
R123	7030010040	S.RES ERJ2GEJ-JPW	T	71.2/30.6
R126	7030004980	S.RES ERJ2GEJ 101 X (100)	B	39.5/40.8
R127	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	37.9/40.8
R128	7030007280	S.RES ERJ2GEJ 331 X (330)	B	39.1/44.4

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R129	7030005000	S.RES ERJ2GEJ 471 X (470)	B	37.4/22.3
R130	7030005530	S.RES ERJ2GEJ 100 X (10)	B	36.4/22.3
R131	7030005000	S.RES ERJ2GEJ 471 X (470)	B	35.4/22.3
R132	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	47.4/17.6
R134	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	91.6/14.8
R135	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	43.1/37.7
R136	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	42.9/38.9
R138	7030005000	S.RES ERJ2GEJ 471 X (470)	B	43.0/35.5
R139	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	48.3/35.5
R140	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	46.5/34.6
R141	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	46.5/33.7
R142	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	46.5/31.9
R146	7030004970	S.RES ERJ2GEJ 470 X (47)	B	45.6/44.0
R147	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	47.1/42.2
R148	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.9/33.7
R149	7030007060	S.RES ERJ2GEJ 684X (680K)	T	41.5/32.3
R151	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	51.7/39.0
R152	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	53.9/35.1
R153	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	55.5/38.7
R154	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	57.8/36.9
R155	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	58.8/39.8
R156	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	21.4/25.5
R157	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	31.0/23.9
R158	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	59.7/35.7
R161	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	62.4/42.8
R162	7030004980	S.RES ERJ2GEJ 101 X (100)	B	64.0/41.2
R163	7030004980	S.RES ERJ2GEJ 101 X (100)	B	69.7/46.4
R164	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	67.3/41.0
R165	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	65.7/44.6
R166	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	65.7/43.7
R167	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	65.7/42.8
R169	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	64.0/41.0
R171	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	36.6/27.4
R172	7030005530	S.RES ERJ2GEJ 100 X (10)	B	39.2/31.1
R173	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.5/32.3
R174	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	38.3/38.8
R175	7030008370	S.RES ERJ2GEJ 561 X (560)	B	35.1/38.8
R176	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	35.5/40.6
R177	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.1/40.7
R178	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	39.2/40.7
R181	7030007270	S.RES ERJ2GEJ 151 X (150)	T	35.5/29.6
R182	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	34.0/28.4
R183	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	37.8/41.1
R184	7030005530	S.RES ERJ2GEJ 100 X (10)	T	37.8/39.3
R185	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	68.8/32.4
R186	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	70.4/31.5
R187	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	67.6/36.3
R188	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	67.6/34.7
R189	7030004980	S.RES ERJ2GEJ 101 X (100)	T	68.9/36.8
R190	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	65.7/46.4
R243	7030005530	S.RES ERJ2GEJ 100 X (10)	B	82.1/21.9
R244	7030005160	S.RES ERJ2GEJ 105 X (1M)	B	83.0/21.9
R358	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/8.7
R359	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/10.5
R360	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	56.0/9.6
R361	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	24.8/41.7
R362	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	51.6/7.5
R363	7030005000	S.RES ERJ2GEJ 471 X (470)	B	58.3/8.6
R364	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	55.3/2.2
R365	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	26.2/38.9
R366	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	58.3/10.2
R367	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	53.6/2.2
R368	7030005700	S.RES ERJ2GEJ 274 X (270K)	T	58.3/12.5
R369	7030005100	S.RES ERJ2GEJ 154 X (150K)	T	63.5/10.6
R370	7030005170	S.RES ERJ2GEJ 474 X (470K)	T	68.0/14.1
R371	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.3/11.6
R372	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.3/11.6
R373	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	75.4/11.6
R388	7030011120	S.RES ERJ2RHD 2702X (27.0K)	T	73.9/20.9
R389	7030012510	S.RES ERJ2RHD 3901X (3.90K)	T	71.0/20.2
R390	7030012520	S.RES ERJ2RHD 8201X (8.20K)	T	71.4/21.5
R393	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	61.7/8.9
R394	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	59.9/7.3
R395	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	60.8/8.9
R396	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.8/7.7
R397	7030008310	S.RES ERJ2GEJ 564 X (560K)	B	59.7/5.3

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R440	7030009280	S.RES ERJ2GEJ 391 X	B	17.4/43.5
R441	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	19.1/33.8
R442	7030007280	S.RES ERJ2GEJ 331 X (330)	B	21.5/35.1
R444	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	90.4/12.8
R451	7030005060	S.RES ERJ2GEJ 333 X (33K)	T	24.6/30.5
R452	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/30.5
R453	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/29.6
R454	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	23.0/30.5
R468	7030005010	S.RES ERJ2GEJ 681 X (680)	T	75.6/19.8
R469	7030008280	S.RES ERJ2GEJ 271 X (270)	T	77.5/20.4
R491	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	71.5/8.0
R492	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	T	72.0/3.7
R493	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	70.3/4.6
R494	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	70.3/5.5
R495	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	70.7/7.1
R496	7030005080	S.RES ERJ2GEJ 823 X (82K)	T	73.7/5.5
R497	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	66.4/13.0
R498	7030008290	S.RES ERJ2GEJ 183 X (18K)	T	71.6/14.5
R499	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	71.5/8.9
R500	7030007350	S.RES ERJ2GEJ 393 X (39K)	B	70.2/9.9
R502	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	69.3/9.9
R503	7030004980	S.RES ERJ2GEJ 101 X (100)	B	61.9/11.6
R504	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	67.3/13.0
R517	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	B	63.3/13.5
R518	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.1/14.8
R527	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	64.6/13.0
R610	7030005080	S.RES ERJ2GEJ 823 X (82K)	T	65.3/13.0
R611	7030010040	S.RES ERJ2GEJ-JPW	T	64.6/10.6
R612	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	64.6/8.6
R614	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	62.1/13.1
R615	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	69.6/6.2
R616	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	68.4/8.3
R618	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	67.4/3.9
R619	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	68.4/5.1
R620	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	92.7/10.0
R621	7030007340	S.RES ERJ2GEJ 153 X (15K)	T	93.6/10.0
R622	7030008290	S.RES ERJ2GEJ 183 X (18K)	T	92.7/8.0
R623	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	T	6.4/46.2
R624	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	90.4/11.2
R625	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	7.8/37.2
R626	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	6.2/37.2
R627	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/21.3
R628	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	88.2/17.0
R630	7030010040	S.RES ERJ2GEJ-JPW	B	63.3/14.9
R631	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	85.3/25.0
R632	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	82.9/23.1
R633	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	85.7/21.9
R634	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	82.7/11.4
R635	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.2/15.5
R636	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.0/14.3
R637	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	87.3/19.7
R638	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.4/16.1
R639	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.6/15.7
R640	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	74.8/12.9
R641	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/22.2
R646	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	92.0/23.0
R647	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.2/22.2
R651	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	86.8/13.5
R652	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	91.1/22.2
R653	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	84.8/21.9
R657	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	84.9/13.1
R661	7410001130	S.ARR EXB28V102JX	B	90.9/12.3
R662	7410001130	S.ARR EXB28V102JX	B	90.9/14.8
R663	7410001130	S.ARR EXB28V102JX	B	88.4/22.3
R664	7410001150	S.ARR EXB28V471JX	B	80.2/22.3
R665	7410001130	S.ARR EXB28V102JX	B	77.2/22.3
R666	7410001130	S.ARR EXB28V102JX	B	75.3/10.9
R667	7410001130	S.ARR EXB28V102JX	B	79.4/6.4
R668	7410001130	S.ARR EXB28V102JX	B	82.4/6.4
R669	7410001130	S.ARR EXB28V102JX	B	85.2/6.4
R683	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.7/19.7
R688	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	81.0/13.1
R691	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	83.1/12.7
R692	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	92.2/20.6
R693	7030007340	S.RES ERJ2GEJ 153 X (15K)	B	93.6/21.9
R694	7030012540	S.RES ERJ2RHD 1502X (15.0K)	B	91.9/20.5
R904	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	73.6/30.0
R905	7030007250	S.RES ERJ2GEJ 220 X (22)	T	75.2/33.2
R906	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	T	75.2/34.1
R907	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	76.1/30.2
R908	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	T	71.6/31.9
R909	7030004980	S.RES ERJ2GEJ 101 X (100)	B	76.1/29.3
R910	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	79.4/32.9
R911	7030010040	S.RES ERJ2GEJ-JPW	B	83.3/33.6
R912	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.2/29.5
R913	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.2/30.4
R914	7030010040	S.RES ERJ2GEJ-JPW	B	75.9/42.5
R915	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	84.8/34.2
R916	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	79.0/38.0
R917	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	85.2/32.5
R918	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	86.4/31.5
R919	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	80.7/29.9
R920	7030010040	S.RES ERJ2GEJ-JPW	B	82.4/28.6
R921	7030010040	S.RES ERJ2GEJ-JPW	T	79.8/31.7
R922	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.5/35.2
R923	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	72.3/46.3
R925	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	75.5/49.3
R930	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	83.0/28.9
R931	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	82.1/28.2
R932	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	82.1/29.8
R933	7030004970	S.RES ERJ2GEJ 470 X (47)	B	72.3/45.4
R934	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	76.9/48.6
R935	7030004970	S.RES ERJ2GEJ 470 X (47)	B	81.4/48.6
R936	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	79.6/48.6
R937	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	78.7/48.6

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION		M.	H/V LOCATION
R938	7030004980	S.RES	ERJ2GEJ 101 X (100)	B	79.9/43.8
R939	7030007290	S.RES	ERJ2GEJ 222 X (2.2K)	B	79.9/42.0
R940	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	76.8/41.8
R941	7030005240	S.RES	ERJ2GEJ 473 X (47K)	B	77.7/42.5
R945	7410001140	S.ARR	EXB28V104JX	T	86.5/43.9
R946	7410001140	S.ARR	EXB28V104JX	B	82.9/41.4
R947	7410001140	S.ARR	EXB28V104JX	B	92.3/37.0
R948	7410001140	S.ARR	EXB28V104JX	B	87.8/35.8
R949	7410001140	S.ARR	EXB28V104JX	B	93.9/33.0
R950	7410001140	S.ARR	EXB28V104JX	B	88.4/33.0
R951	7410001140	S.ARR	EXB28V104JX	T	84.8/29.3
R952	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	78.1/36.8
R953	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	78.8/37.7
R956	7030010040	S.RES	ERJ2GEJ-JPW	B	96.3/32.9
R957	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	94.7/30.9
R958	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	85.7/42.4
R961	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	90.9/30.9
R962	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	89.5/28.4
R963	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	95.4/32.9
R964	7410001140	S.ARR	EXB28V104JX	B	85.9/39.4
R965	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	79.2/29.3
R966	7030005090	S.RES	ERJ2GEJ 104 X (100K)	B	77.9/29.8
R968	7030005090	S.RES	ERJ2GEJ 104 X (100K)	T	88.9/18.3
R969	7030005160	S.RES	ERJ2GEJ 105 X (1M)	T	88.2/19.7
R970	7030010040	S.RES	ERJ2GEJ-JPW	B	71.4/38.1
R971	7030010040	S.RES	ERJ2GEJ-JPW	B	75.3/38.0
R972	7030010040	S.RES	ERJ2GEJ-JPW	B	74.0/38.6
C2	4030017620	S.CER	C1005 CH 1H 100C-T	B	10.3/6.1
C3	4030017410	S.CER	C1005 CH 1H 240J-T	B	7.4/12.0
C4	4030017570	S.CER	C1005 CH 1H 040B-T	B	11.5/11.4
C5	4030017650	S.CER	C1005 CH 1H 270J-T	B	12.4/11.4
C6	4030017550	S.CER	C1005 CH 1H 1R5B-T	B	11.5/13.0
C7	4030017640	S.CER	C1005 CH 1H 150J-T	B	12.4/13.0
C8	4030017460	S.CER	C1005 JB 1H 102K-T	B	14.5/17.2
C11	4030017460	S.CER	C1005 JB 1H 102K-T	B	20.6/20.1
C15	4030017400	S.CER	C1005 CH 1H 220J-T	B	16.3/14.3
C16	4030017390	S.CER	C1005 CH 1H 180J-T	B	17.9/11.3
C20	4030017460	S.CER	C1005 JB 1H 102K-T	B	20.4/14.1
C21	4030007070	S.CER	C1608 CH 1H 330J-T	[USA-01] [EUR-01] [UK-01]	21.3/10.4
	4030008560	S.CER	C1608 CH 1H 300J-T	[EXP-01]	
	4030008560	S.CER	C1608 CH 1H 300J-T	[EXP-02]	
	4030007070	S.CER	C1608 CH 1H 330J-T	[AUS-01]	
	4030007070	S.CER	C1608 CH 1H 330J-T	[RUS-01]	
	4030007070	S.CER	C1608 CH 1H 330J-T	[CHN-01]	
C22	4030007040	S.CER	C1608 CH 1H 180J-T	[EUR-01] [UK-01]	B 22.0/12.4
C23	4030007050	S.CER	C1608 CH 1H 220J-T	[USA-01] [EUR-01] [UK-01]	B 22.7/10.4
	4030008560	S.CER	C1608 CH 1H 300J-T	[EXP-01]	
	4030008560	S.CER	C1608 CH 1H 300J-T	[EXP-02]	
	4030007050	S.CER	C1608 CH 1H 220J-T	[AUS-01]	
	4030007050	S.CER	C1608 CH 1H 220J-T	[RUS-01]	
	4030007050	S.CER	C1608 CH 1H 220J-T	[CHN-01]	
C24	4030017530	S.CER	C1005 CH 1H 0R5B-T	B	13.6/11.4
C25	4030017460	S.CER	C1005 JB 1H 102K-T	T	19.8/10.5
C26	4030017460	S.CER	C1005 JB 1H 102K-T	T	29.4/5.7
C27	4030017460	S.CER	C1005 JB 1H 102K-T	T	37.2/5.8
C28	4030017460	S.CER	C1005 JB 1H 102K-T	T	33.9/11.5
C29	4030016930	S.CER	C1005 JB 1A 104K-T	T	31.2/11.5
C30	4030018890	S.CER	C1005 JB 0J 224K-T	T	32.8/6.6
C31	4030016930	S.CER	C1005 JB 1A 104K-T	T	34.8/11.5
C32	4030017460	S.CER	C1005 JB 1H 102K-T	T	35.7/9.9
C33	4030017460	S.CER	C1005 JB 1H 102K-T	T	37.2/7.5
C34	4030018860	S.CER	C1005 JB 0J 105K-T	T	38.1/7.5
C35	4030017420	S.CER	C1005 CH 1H 470J-T	B	37.5/9.2
C36	4030017460	S.CER	C1005 JB 1H 102K-T	B	39.3/9.2
C37	4030017530	S.CER	C1005 CH 1H 0R5B-T	B	13.6/12.3
C38	4030017460	S.CER	C1005 JB 1H 102K-T	T	17.9/12.7
C40	4030017420	S.CER	C1005 CH 1H 470J-T	T	21.4/13.2
C41	4030017460	S.CER	C1005 JB 1H 102K-T	B	28.0/17.6
C43	4030017490	S.CER	C1608 JB 1A 105K-T	B	27.8/20.3
C44	4030017460	S.CER	C1005 JB 1H 102K-T	T	32.7/16.6
C45	4030017460	S.CER	C1005 JB 1H 102K-T	T	21.4/12.3
C46	4030017510	S.CER	C1005 CH 1H 680J-T	B	32.8/12.4
C48	4030017460	S.CER	C1005 JB 1H 102K-T	B	32.8/9.2
C49	4030017420	S.CER	C1005 CH 1H 470J-T	B	31.9/9.2
C51	4030017460	S.CER	C1005 JB 1H 102K-T	B	23.4/22.7
C52	4030017460	S.CER	C1005 JB 1H 102K-T	B	32.8/14.4
C53	4030017460	S.CER	C1005 JB 1H 102K-T	B	37.5/10.9
C54	4030016790	S.CER	C1005 JB 1E 103K-T	B	39.3/10.9
C55	4030017490	S.CER	C1608 JB 1A 105K-T	B	33.5/16.6
C56	4030017430	S.CER	C1005 CH 1H 101J-T	B	39.9/13.1
C57	4030017460	S.CER	C1005 JB 1H 102K-T	B	40.5/14.9
C58	4030017420	S.CER	C1005 CH 1H 470J-T	B	44.6/11.3
C59	4030017460	S.CER	C1005 JB 1H 102K-T	T	44.6/10.4
C60	4030017460	S.CER	C1005 JB 1H 102K-T	B	44.6/12.2
C63	4030017650	S.CER	C1005 CH 1H 270J-T	B	46.4/14.9
C64	4030016790	S.CER	C1005 JB 1E 103K-T	B	49.6/12.1
C65	4030017460	S.CER	C1005 JB 1H 102K-T	B	51.2/14.0
C71	4030017620	S.CER	C1005 CH 1H 100C-T	B	51.8/16.6
C72	4030017460	S.CER	C1005 JB 1H 102K-T	B	51.2/17.8
C73	4030017460	S.CER	C1005 JB 1H 102K-T	T	53.0/19.9
C74	4030017590	S.CER	C1005 CH 1H 070C-T	T	58.0/18.4
C75	4030017460	S.CER	C1005 JB 1H 102K-T	T	54.1/20.4
C76	4030017460	S.CER	C1005 JB 1H 102K-T	B	58.6/18.6
C77	4030017460	S.CER	C1005 JB 1H 102K-T	T	64.3/17.7
C78	4030017460	S.CER	C1005 JB 1H 102K-T	T	58.9/18.9
C79	4030016930	S.CER	C1005 JB 1A 104K-T	B	64.3/21.2
C80	4030017460	S.CER	C1005 JB 1H 102K-T	B	64.3/23.4
C81	4030017360	S.CER	C1005 CH 1H 030B-T	T	58.5/17.3

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C83	4030017540	S.CER C1005 CH 1H R75B-T	T	58.9/21.2
C85	4030017460	S.CER C1005 JB 1H 102K-T	T	57.1/21.2
C86	4030017660	S.CER C1005 CH 1H 330J-T	T	57.0/25.9
C87	4030017660	S.CER C1005 CH 1H 330J-T	T	58.0/21.2
C88	4030017660	S.CER C1005 CH 1H 330J-T	T	56.1/25.9
C89	4030017660	S.CER C1005 CH 1H 330J-T	T	57.9/27.5
C90	4030017460	S.CER C1005 JB 1H 102K-T	B	61.7/28.8
C93	4030017420	S.CER C1005 CH 1H 470J-T	T	53.2/28.5
C94	4030017610	S.CER C1005 CH 1H 090C-T	T	53.2/27.5
C101	4030017530	S.CER C1005 CH 1H 0R5B-T	T	59.8/21.2
C102	4030016930	S.CER C1005 JB 1A 104K-T	T	56.2/21.8
C103	4030017460	S.CER C1005 JB 1H 102K-T	T	61.8/21.8
C104	4030017390	S.CER C1005 CH 1H 180J-T	T	59.8/25.9
C105	4030017660	S.CER C1005 CH 1H 330J-T	T	60.7/21.2
C106	4030017510	S.CER C1005 CH 1H 680J-T	T	61.6/25.9
C107	4030017660	S.CER C1005 CH 1H 330J-T	T	61.1/27.1
C108	4030017460	S.CER C1005 JB 1H 102K-T	B	60.8/25.6
C109	4550008090	S.TAN TCTU0J105K8R	B	65.6/28.8
C111	4030017340	S.CER C1005 CH 1H 010B-T	T	61.1/29.2
C112	4030017440	S.CER C1005 CH 1H 221J-T	T	62.7/25.3
C113	4030017360	S.CER C1005 CH 1H 030B-T	T	64.7/23.5
C114	4030017360	S.CER C1005 CH 1H 030B-T	T	63.8/23.1
C115	4030017610	S.CER C1005 CH 1H 090C-T	T	64.7/25.3
C116	4030018860	S.CER C1005 JB 0J 105K-T	B	63.1/30.0
C117	4030018820	S.CER C1005 JB 1H 561K-T	B	61.5/30.9
C118	4030017420	S.CER C1005 CH 1H 470J-T	B	66.3/30.0
C119	4030016930	S.CER C1005 JB 1A 104K-T	B	64.1/24.9
C120	4030017460	S.CER C1005 JB 1H 102K-T	B	64.7/31.8
C121	4030019560	S.CER GRM21BB31C106KE15L	B	61.1/19.7
C122	4030016790	S.CER C1005 JB 1E 103K-T	B	65.0/16.4
C123	4030017460	S.CER C1005 JB 1H 102K-T	B	47.0/29.0
C124	4030017460	S.CER C1005 JB 1H 102K-T	B	53.7/29.9
C130	4030017420	S.CER C1005 CH 1H 470J-T	B	59.9/21.6
C132	4550000560	S.TAN TEESVA 1V 334M8R	T	48.3/21.4
Eqv.	4550007550	S.TAN F931V334MAABMA		
C134	4550003250	S.TAN TEESVA 1V 474M8R	T	46.7/29.8
Eqv.	4550007590	S.TAN F931V474MAABMA		
C141	4030017620	S.CER C1005 CH 1H 100C-T	B	51.4/19.5
C144	4030017430	S.CER C1005 CH 1H 101J-T	T	43.3/20.5
C145	4030018890	S.CER C1005 JB 0J 224K-T	T	42.4/20.5
C146	4030018890	S.CER C1005 JB 0J 224K-T	T	41.5/20.5
C147	4030017460	S.CER C1005 JB 1H 102K-T	T	46.4/21.1
C148	4030019560	S.CER GRM21BB31C106KE15L	B	44.0/26.2
C149	4030017430	S.CER C1005 CH 1H 101J-T	T	44.2/20.5
C150	4030016790	S.CER C1005 JB 1E 103K-T	T	43.9/28.1
C151	4030017430	S.CER C1005 CH 1H 101J-T	T	43.9/27.2
C152	4030017460	S.CER C1005 JB 1H 102K-T	T	43.9/29.0
C153	4030017420	S.CER C1005 CH 1H 470J-T	T	43.1/30.4
C154	4030017420	S.CER C1005 CH 1H 470J-T	T	42.2/30.4
C155	4030017420	S.CER C1005 CH 1H 470J-T	T	41.3/30.4
C156	4030016930	S.CER C1005 JB 1A 104K-T	T	40.4/30.4
C157	4030017460	S.CER C1005 JB 1H 102K-T	T	41.0/18.8
C158	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/18.8
C159	4030016930	S.CER C1005 JB 1A 104K-T	T	40.1/10.9
C160	4030017460	S.CER C1005 JB 1H 102K-T	T	41.9/10.9
C167	4030017630	S.CER C1005 CH 1H 120J-T	B	49.2/22.2
C168	4030017630	S.CER C1005 CH 1H 120J-T	B	48.3/22.2
C169	4030017620	S.CER C1005 CH 1H 100C-T	B	48.8/21.0
C171	4030018120	S.CER C1005 CH 1H 110J-T	B	16.2/18.5
C172	4030017640	S.CER C1005 CH 1H 150J-T	B	13.9/22.1
C173	4030017460	S.CER C1005 JB 1H 102K-T	B	13.4/24.4
C174	4030017580	S.CER C1005 CH 1H 060C-T	B	12.4/24.4
C175	4030017580	S.CER C1005 CH 1H 060C-T	B	12.9/26.5
C176	4030017430	S.CER C1005 CH 1H 101J-T	B	16.2/26.6
C178	4030017550	S.CER C1005 CH 1H 1R5B-T	B	18.0/29.2
C179	4030017370	S.CER C1005 CH 1H 3R5B-T	B	19.6/27.8
C180	4030017430	S.CER C1005 CH 1H 101J-T	B	19.2/26.0
C181	4030017370	S.CER C1005 CH 1H 3R5B-T	B	22.9/27.8
C182	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/24.6
C183	4030017460	S.CER C1005 JB 1H 102K-T	B	16.2/25.7
C184	4030016930	S.CER C1005 JB 1A 104K-T	T	20.9/26.7
C186	4030016930	S.CER C1005 JB 1A 104K-T	B	21.7/30.0
C188	4030016930	S.CER C1005 JB 1A 104K-T	B	25.3/30.0
C189	4030017460	S.CER C1005 JB 1H 102K-T	B	27.1/23.9
C191	4030016790	S.CER C1005 JB 1E 103K-T	B	28.7/28.7
C192	4030017460	S.CER C1005 JB 1H 102K-T	B	26.2/25.6
C193	4030017460	S.CER C1005 JB 1H 102K-T	B	25.3/25.6
C195	4030017570	S.CER C1005 CH 1H 040B-T	B	28.2/27.5
C196	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/25.6
C197	4030017550	S.CER C1005 CH 1H 1R5B-T	B	31.0/29.8
	4030017350	S.CER C1005 CH 1H 020B-T	[USA-01]	
	4030017350	S.CER C1005 CH 1H 020B-T	[EUR-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[UK-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[EXP-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[EXP-02]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[AUS-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[RUS-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[CHN-01]	
C198	4030017460	S.CER C1005 JB 1H 102K-T	B	32.3/25.8
C199	4030017380	S.CER C1005 CH 1H 050B-T	B	34.4/26.6
C200	4030017580	S.CER C1005 CH 1H 060C-T	B	34.7/27.9
C201	4030017460	S.CER C1005 JB 1H 102K-T	T	31.8/23.6
C202	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/23.9
C203	4030016930	S.CER C1005 JB 1A 104K-T	B	30.1/23.9
C206	4030017620	S.CER C1005 CH 1H 100C-T	B	47.4/16.6
C210	4030017630	S.CER C1005 CH 1H 120J-T	B	35.4/23.9
C211	4030017460	S.CER C1005 JB 1H 102K-T	B	34.4/22.3
C214	4030017460	S.CER C1005 JB 1H 102K-T	B	37.4/23.9
C215	4030017390	S.CER C1005 CH 1H 180J-T	B	41.9/26.3
C216	4030017460	S.CER C1005 JB 1H 102K-T	B	41.0/23.9
C217	4030016790	S.CER C1005 JB 1E 103K-T	B	40.1/23.9
C218	4030016790	S.CER C1005 JB 1E 103K-T	B	37.5/28.5
C223	4030017460	S.CER C1005 JB 1H 102K-T	B	41.9/22.3
C224	4030017460	S.CER C1005 JB 1H 102K-T	B	45.7/17.6
C225	4030017460	S.CER C1005 JB 1H 102K-T	T	39.5/38.8
C226	4030016790	S.CER C1005 JB 1E 103K-T	B	37.3/44.4

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C227	4030016790	S.CER C1005 JB 1E 103K-T	B	36.3/40.8
C231	4030017430	S.CER C1005 CH 1H 101J-T	B	40.6/42.6
C232	4030017660	S.CER C1005 CH 1H 330J-T	T	42.0/38.9
C233	4030017460	S.CER C1005 JB 1H 102K-T	B	41.1/39.0
C235	4030019560	S.CER GRM21BB31C106KE15L	B	44.5/42.6
C236	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/43.1
C238	4030017460	S.CER C1005 JB 1H 102K-T	B	41.1/40.1
C239	4030017720	S.CER C1005 JB 1H 331K-T	T	43.1/40.1
C240	4030017460	S.CER C1005 JB 1H 102K-T	B	44.7/35.5
C241	4030017420	S.CER C1005 CH 1H 470J-T	B	46.5/32.8
C242	4030017710	S.CER C1005 CH 1H 181J-T	B	48.3/34.6
C243	4030017710	S.CER C1005 CH 1H 181J-T	B	46.5/35.5
C244	4030016930	S.CER C1005 JB 1A 104K-T	B	50.2/37.0
C246	4030019460	S.CER C1608 JB 0J 106M-T	T	68.8/30.7
C247	4030018140	S.CER C1005 JB 1H 391K-T	T	70.4/32.4
C248	4030016930	S.CER C1005 JB 1A 104K-T	T	68.9/37.7
C251	4030017360	S.CER C1005 CH 1H 030B-T	T	44.1/36.8
C252	4030017500	S.CER C1005 CH 1H 560J-T	T	42.5/36.8
C253	4030017580	S.CER C1005 CH 1H 060C-T	T	44.1/35.9
C254	4030017500	S.CER C1005 CH 1H 560J-T	T	42.6/34.6
C255	4030016790	S.CER C1005 JB 1E 103K-T	T	45.1/32.1
C256	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/32.3
C257	4030016790	S.CER C1005 JB 1E 103K-T	T	40.9/34.6
C261	4030016790	S.CER C1005 JB 1E 103K-T	B	50.5/38.6
C262	4030016790	S.CER C1005 JB 1E 103K-T	B	50.2/47.0
C263	4030016790	S.CER C1005 JB 1E 103K-T	B	57.1/41.5
C264	4030016790	S.CER C1005 JB 1E 103K-T	B	53.9/36.0
C265	4030016790	S.CER C1005 JB 1E 103K-T	B	58.7/36.9
C266	4030016930	S.CER C1005 JB 1A 104K-T	B	56.3/37.5
C267	4030016930	S.CER C1005 JB 1A 104K-T	B	58.1/35.7
C271	4030016930	S.CER C1005 JB 1A 104K-T	B	61.5/43.8
C272	4030016930	S.CER C1005 JB 1A 104K-T	B	62.4/41.9
C273	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/45.5
C274	4030016930	S.CER C1005 JB 1A 104K-T	B	68.9/42.0
C275	4030017040	S.CER C1005 JB 1A 333K-T	B	68.1/46.4
C276	4030017650	S.CER C1005 CH 1H 270J-T	B	67.3/42.0
C277	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/41.0
C282	4030016790	S.CER C1005 JB 1E 103K-T	B	40.8/31.1
C283	4030017590	S.CER C1005 CH 1H 070C-T	B	39.0/35.3
C284	4030016790	S.CER C1005 JB 1E 103K-T	B	36.7/38.8
C286	4030016790	S.CER C1005 JB 1E 103K-T	T	34.9/28.9
C287	4030017570	S.CER C1005 CH 1H 040B-T	T	37.1/29.6
C288	4030017600	S.CER C1005 CH 1H 080C-T	T	39.9/32.3
C290	4030016790	S.CER C1005 JB 1E 103K-T	T	37.8/40.2
C291	4030016930	S.CER C1005 JB 1A 104K-T	B	42.4/32.3
C292	4030016930	S.CER C1005 JB 1A 104K-T	T	38.3/44.1
C293	4030017460	S.CER C1005 JB 1H 102K-T	T	40.1/42.4
C311	4030018860	S.CER C1005 JB 0J 105K-T	T	24.6/31.4
C312	4030017710	S.CER C1005 CH 1H 181J-T	T	23.0/31.4
C313	4030016930	S.CER C1005 JB 1A 104K-T	T	21.2/28.0
C318	4030016790	S.CER C1005 JB 1E 103K-T	B	73.5/21.0
C319	4030016930	S.CER C1005 JB 1A 104K-T	B	75.4/23.9
C322	4030018860	S.CER C1005 JB 0J 105K-T	B	71.5/6.2
C323	4030016930	S.CER C1005 JB 1A 104K-T	B	68.4/9.9
C324	4030017740	S.CER C1005 JB 1H 821K-T	B	68.4/6.7
C325	4030016790	S.CER C1005 JB 1E 103K-T	T	80.2/9.6
C327	4030017900	S.CER C1005 JB 1E 123K-T	B	60.9/14.3
C328	4030020010	S.CER C1005 CH 1H 271J-T	B	63.3/12.6
C334	4030017460	S.CER C1005 JB 1H 102K-T	B	15.0/46.6
C335	4030017460	S.CER C1005 JB 1H 102K-T	B	24.6/38.2
C336	4030018860	S.CER C1005 JB 0J 105K-T	B	57.3/8.6
C337	4030017460	S.CER C1005 JB 1H 102K-T	B	52.5/7.5
C338	4030017460	S.CER C1005 JB 1H 102K-T	B	50.7/7.5
C339	4030017460	S.CER C1005 JB 1H 102K-T	B	53.4/7.5
C340	4030016930	S.CER C1005 JB 1A 104K-T	B	57.3/10.2
C342	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/6.6
C343	4030019560	S.CER GRM21BB31C106KE15L	B	57.6/6.9
C344	4030016930	S.CER C1005 JB 1A 104K-T	B	55.1/2.2
C361	4030016930	S.CER C1005 JB 1A 104K-T	B	69.0/14.4
C364	4030017630	S.CER C1005 CH 1H 120J-T	B	64.5/3.9
C376	4030017460	S.CER C1005 JB 1H 102K-T	T	73.0/20.9

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C428	4030017460	S.CER C1005 JB 1H 102K-T	T	16.4/32.2
C429	4030016790	S.CER C1005 JB 1E 103K-T	B	72.2/14.8
C430	4030016930	S.CER C1005 JB 1A 104K-T	T	63.4/9.0
C431	4510009870	S.ELE 10 CE 100 LD	T	14.7/27.2
C432	4030017460	S.CER C1005 JB 1H 102K-T	T	92.7/6.4
C433	4030017460	S.CER C1005 JB 1H 102K-T	T	17.3/32.2
C434	4030016790	S.CER C1005 JB 1E 103K-T	T	14.3/32.7
C435	4550007320	S.TAN F930J226MAABMA	T	19.4/30.8
C437	4030017460	S.CER C1005 JB 1H 102K-T	T	14.3/31.8
C448	4030019490	S.CER C2012 JB 1A 106K-T	B	28.3/46.0
C451	4030016930	S.CER C1005 JB 1A 104K-T	B	86.6/21.9
C452	4030016930	S.CER C1005 JB 1A 104K-T	B	86.6/24.5
C453	4030017640	S.CER C1005 CH 1H 150J-T	T	83.9/22.5
C454	4030017580	S.CER C1005 CH 1H 060C-T	T	85.2/21.3
C455	4030017640	S.CER C1005 CH 1H 150J-T	B	83.9/21.9
C456	4030016930	S.CER C1005 JB 1A 104K-T	T	82.7/10.5
C457	4030017030	S.CER C1005 JB 1A 273K-T	T	86.0/9.3
C458	4030018900	S.CER C1005 JB 0J 474K-T	T	84.2/19.8
C461	4030019990	S.CER C1005 JB 1C 104K-T	B	96.9/12.4
C462	4030020190	S.CER GRM32EB31C476KE15L	B	96.3/9.1
C463	4030019990	S.CER C1005 JB 1C 104K-T	T	93.6/8.0
C464	4030020190	S.CER GRM32EB31C476KE15L	T	90.7/7.0
C465	4050000240	S.FEE NFM18PC104R1C3D	T	88.5/9.0
C466	4030018860	S.CER C1005 JB 0J 105K-T	T	88.6/10.7
C467	4030018860	S.CER C1005 JB 0J 105K-T	T	89.5/12.8
C468	4030020190	S.CER GRM32EB31C476KE15L	B	92.4/8.0
C482	4030017920	S.CER C1005 JB 1A 683K-T [USA-01]	T	72.0/4.6
	4030018390	S.CER C1005 JB 1A 563K-T [EUR-01]		
	4030018390	S.CER C1005 JB 1A 563K-T [UK-01]		
	4030017920	S.CER C1005 JB 1A 683K-T [EXP-01]		
	4030017920	S.CER C1005 JB 1A 683K-T [EXP-02]		
	4030017920	S.CER C1005 JB 1A 683K-T [AUS-01]		
	4030017920	S.CER C1005 JB 1A 683K-T [RUS-01]		
	4030017920	S.CER C1005 JB 1A 683K-T [CHN-01]		
C483	4030018860	S.CER C1005 JB 0J 105K-T	T	70.3/3.7
C484	4030018860	S.CER C1005 JB 0J 105K-T	T	72.0/5.5
C485	4030018860	S.CER C1005 JB 0J 105K-T	B	72.3/7.1
C486	4030016930	S.CER C1005 JB 1A 104K-T	T	70.7/14.5
C487	4030018860	S.CER C1005 JB 0J 105K-T	T	72.5/14.5
C488	4030018860	S.CER C1005 JB 0J 105K-T	T	73.7/14.4
C489	4030018860	S.CER C1005 JB 0J 105K-T	B	65.5/13.0
C490	4030017920	S.CER C1005 JB 1A 683K-T	T	73.7/3.7
C491	4030016790	S.CER C1005 JB 1E 103K-T	T	73.7/4.6
C492	4030017430	S.CER C1005 CH 1H 101J-T	B	70.2/8.3
C493	4030018100	S.CER C1005 JB 1H 681K-T	B	72.2/9.8
C494	4030016790	S.CER C1005 JB 1E 103K-T	B	69.3/8.3
C501	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/16.1
C502	4030016930	S.CER C1005 JB 1A 104K-T	B	75.5/17.9
C503	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/15.2
C504	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/17.0
C505	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/14.3
C506	4030016930	S.CER C1005 JB 1A 104K-T	B	75.6/19.3
C507	4030018860	S.CER C1005 JB 0J 105K-T	T	83.3/8.9
C508	4030017460	S.CER C1005 JB 1H 102K-T	T	84.2/8.9
C509	4030018860	S.CER C1005 JB 0J 105K-T	T	90.2/18.6
C510	4030017460	S.CER C1005 JB 1H 102K-T	T	88.6/11.6
C511	4030018860	S.CER C1005 JB 0J 105K-T	T	91.4/21.7
C512	4030018860	S.CER C1005 JB 0J 105K-T	B	75.7/12.9
C513	4030016930	S.CER C1005 JB 1A 104K-T	T	86.4/19.7
C514	4030018860	S.CER C1005 JB 0J 105K-T	T	76.7/18.6
C515	4030017460	S.CER C1005 JB 1H 102K-T	T	91.4/22.6
C900	4030016930	S.CER C1005 JB 1A 104K-T	T	75.5/35.6
C901	4030018910	S.CER C1608 JB 0J 475K-T	T	76.0/36.7
C903	4050000240	S.FEE NFM18PC104R1C3D	B	72.3/39.3
C904	4050000240	S.FEE NFM18PC104R1C3D	B	73.1/41.2
C905	4050000240	S.FEE NFM18PC104R1C3D	B	72.3/36.9
C907	4030017460	S.CER C1005 JB 1H 102K-T	T	75.2/32.3
C908	4030018910	S.CER C1608 JB 0J 475K-T	T	77.5/34.4
C909	4030016930	S.CER C1005 JB 1A 104K-T	T	78.1/35.5
C910	4030016930	S.CER C1005 JB 1A 104K-T	B	75.9/40.9
C911	4550007730	S.TAN TEESVJ 0J 106M8R	B	74.8/41.1
Eqv.	4550008380	S.TAN TMCJ0J106MTRF		
C912	4030018910	S.CER C1608 JB 0J 475K-T	T	78.8/39.4
C913	4030016930	S.CER C1005 JB 1A 104K-T	T	80.0/40.0
C915	4030016930	S.CER C1005 JB 1A 104K-T	B	70.6/35.9
C916	4550007730	S.TAN TEESVJ 0J 106M8R	B	71.8/33.7
Eqv.	4550008380	S.TAN TMCJ0J106MTRF		
C917	4030016930	S.CER C1005 JB 1A 104K-T	B	70.6/35.0
C918	4030016790	S.CER C1005 JB 1E 103K-T	B	71.2/41.4
C919	4030018860	S.CER C1005 JB 0J 105K-T	T	81.1/44.5
C920	4030016790	S.CER C1005 JB 1E 103K-T	T	81.1/43.6
C921	4030018910	S.CER C1608 JB 0J 475K-T	B	80.3/39.6
C922	4030018910	S.CER C1608 JB 0J 475K-T	B	78.4/40.2
C923	4030016790	S.CER C1005 JB 1E 103K-T	B	90.0/30.9
C924	4030016790	S.CER C1005 JB 1E 103K-T	B	73.6/30.9
C925	4030017420	S.CER C1005 CH 1H 470J-T	B	85.2/28.6
C926	4030017460	S.CER C1005 JB 1H 102K-T	B	83.7/29.8
C927	4030019460	S.CER C1608 JB 0J 106M-T	B	73.7/32.6
C928	4030018860	S.CER C1005 JB 0J 105K-T	B	74.9/29.8
C930	4030018860	S.CER C1005 JB 0J 105K-T	B	83.3/31.9
C931	4030018860	S.CER C1005 JB 0J 105K-T	B	86.7/41.3
C932	4030016930	S.CER C1005 JB 1A 104K-T	B	75.4/31.7
C933	4030016930	S.CER C1005 JB 1A 104K-T	B	71.8/35.4
C934	4030018910	S.CER C1608 JB 0J 475K-T	B	70.7/32.2
C935	4030016790	S.CER C1005 JB 1E 103K-T	B	90.2/38.4
C936	4030018860	S.CER C1005 JB 0J 105K-T	B	89.8/37.5
C937	4030016790	S.CER C1005 JB 1E 103K-T	B	88.0/30.4
C938	4030017420	S.CER C1005 CH 1H 470J-T	B	81.6/29.9
C939	4030017420	S.CER C1005 CH 1H 470J-T	B	80.0/31.1
C940	4030018910	S.CER C1608 JB 0J 475K-T	B	83.2/43.3
C941	4030016930	S.CER C1005 JB 1A 104K-T	T	83.3/43.6
C942	4030016930	S.CER C1005 JB 1A 104K-T	B	92.3/41.2
C943	4030016790	S.CER C1005 JB 1E 103K-T	B	87.7/41.3
C944	4030016930	S.CER C1005 JB 1A 104K-T	B	76.8/43.4
C945	4030016930	S.CER C1005 JB 1A 104K-T	B	72.3/44.5

Eqv.= This component is equivalent to the REF No. component listed above, and may be substituted on parts orders and repairs.

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C946	4030016930	S.CER C1005 JB 1A 104K-T	B	75.5/48.4
C947	4030016930	S.CER C1005 JB 1A 104K-T	B	78.5/27.0
C948	4030016930	S.CER C1005 JB 1A 104K-T	B	74.1/43.9
C949	4030017420	S.CER C1005 CH 1H 470J-T	B	72.3/43.6
C950	4030017620	S.CER C1005 CH 1H 100C-T	B	77.8/48.6
C951	4030016930	S.CER C1005 JB 1A 104K-T	B	78.0/46.9
C952	4030017400	S.CER C1005 CH 1H 220J-T	B	83.1/27.1
C953	4030017460	S.CER C1005 JB 1H 102K-T	B	80.5/48.6
C954	4030016790	S.CER C1005 JB 1E 103K-T	B	82.3/48.6
C955	4030016930	S.CER C1005 JB 1A 104K-T	B	78.3/43.8
C956	4030017380	S.CER C1005 CH 1H 050B-T	B	79.9/42.9
C957	4030016930	S.CER C1005 JB 1A 104K-T	B	78.6/42.5
C958	4030016930	S.CER C1005 JB 1A 104K-T	T	68.9/38.6
C959	4030017620	S.CER C1005 CH 1H 100C-T	B	78.3/41.3
J51	6450000131	CON HSJ1102-018540		
J52	6450002250	CON HSJ1456-010320		
J53	6510021901	S.CON BM02B-ASRS-TF(LF)(SN)	T	27.2/34.5
F51	5210001160	S.FUS ERBRE3R00V	T	10.7/37.6
DS51	5040003520	S.LED LNJ115W8PRA	T	2.0/37.9
MC51	7700002950	MIC EM9745P-33-G <HOR>		
S51	2260001900	SWI SW-149 (SKHLLD)		
S52	2260002800	S.SWI SW-167 (SKQTLAE010)	B	39.2/1.9
S53	2260002800	S.SWI SW-167 (SKQTLAE010)	B	48.7/1.9
S54	2250000680	ENC FSR080453W-1+16C L15.9 <SLV>		
EP2	6910018460	S.BEA MMZ1005Y102C-T	B	32.8/15.5
EP3	6910018460	S.BEA MMZ1005Y102C-T	B	63.4/21.2
EP4	6910018460	S.BEA MMZ1005Y102C-T	T	45.1/28.7
EP5	6910018460	S.BEA MMZ1005Y102C-T	T	41.0/10.9
EP6	6910014730	S.BEA MPZ2012S331A-T	B	25.2/21.4
EP7	6910021240	S.BEA MMZ1005A152ET	B	61.7/25.6
EP8	6910021240	S.BEA MMZ1005A152ET	B	62.6/28.8
EP51	6910018460	S.BEA MMZ1005Y102C-T	B	19.1/46.2
EP52	6910021240	S.BEA MMZ1005A152ET	B	95.9/13.0
EP53	6910021240	S.BEA MMZ1005A152ET	B	95.9/15.6
EP900	6910016330	S.BEA MMZ1005S 601CT-S	B	71.2/42.3
EP902	6910016330	S.BEA MMZ1005S 601CT-S	B	70.1/33.7
EP903	6910016330	S.BEA MMZ1005S 601CT-S	T	83.2/49.7
EP904	6910016330	S.BEA MMZ1005S 601CT-S	T	94.4/47.0
EP905	6910016330	S.BEA MMZ1005S 601CT-S	B	84.5/49.8
EP906	6910016330	S.BEA MMZ1005S 601CT-S	B	93.2/46.9

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

VOLTAGE DIAGRAM

MAIN UNIT (1/3)

Explanatory notes

- TX Line
- RX Line
- Common Line
- Voltage Line


Key components and values:

- TX 1.85V RX 1.87V
- TX 1.53MHz 1.06Vp-p
- LOCK 3.27V UNLOCK 0V
- TX 0V RX 3.27V
- TX 0V RX 4.69V
- TX 0V RX 0.59V
- TX 2.41V RX 0V
- TX 0V RX 2.42V
- TX 0.37V RX 0.36V
- TX 2.82V RX 0V
- TX 1.00V RX 1.03V
- TX 5W 1.61V TX 1W 1.23V RX 0V
- TX 5W 1.96V TX 1W 0.61V RX 0V
- TX 0.82V RX 0V
- TX 5W 3.90V TX 1W 1.30V RX 0V
- TX 0V RX 0.29V
- TX 0V RX 1.47V
- TX 0V RX 2.61V
- A 2.74V D 0V
- W 2.74V N 0V

***: Refer to the PARTS LIST for the value and name of component.**


[illegible]

• MAIN UNIT (2/3)

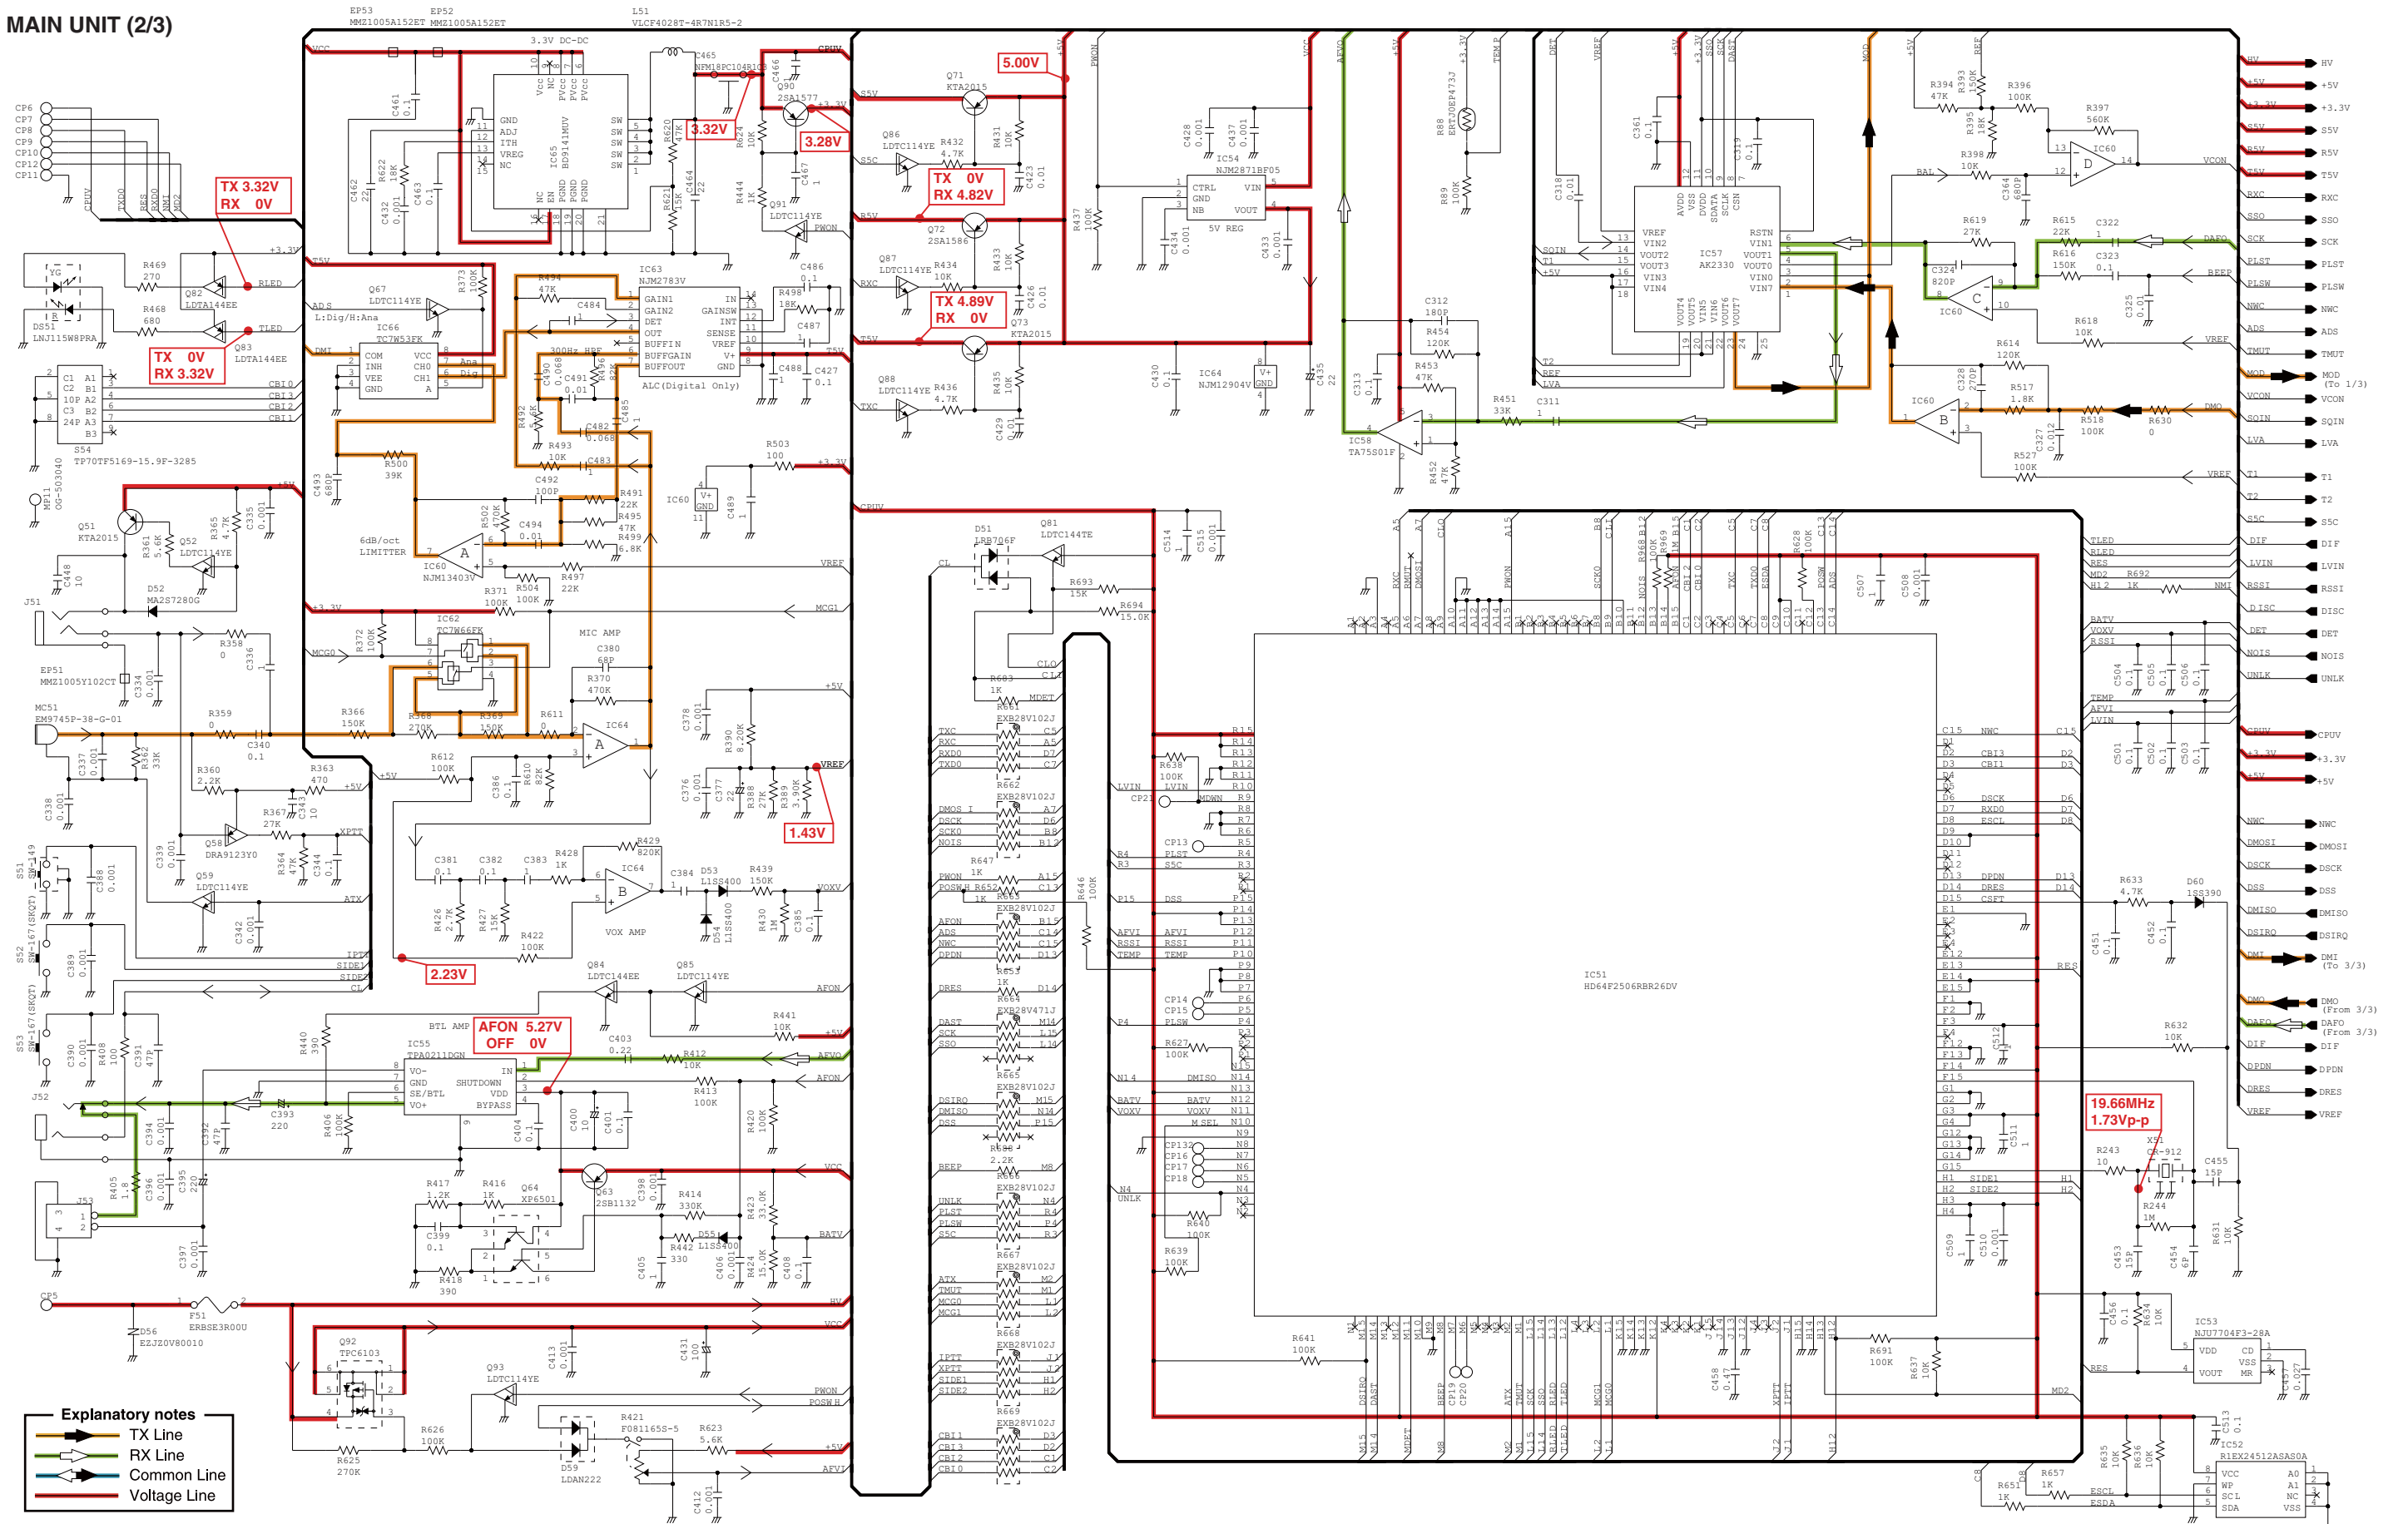

*: Refer to the PARTS LIST for the value and name of component.

• MAIN UNIT (3/3)

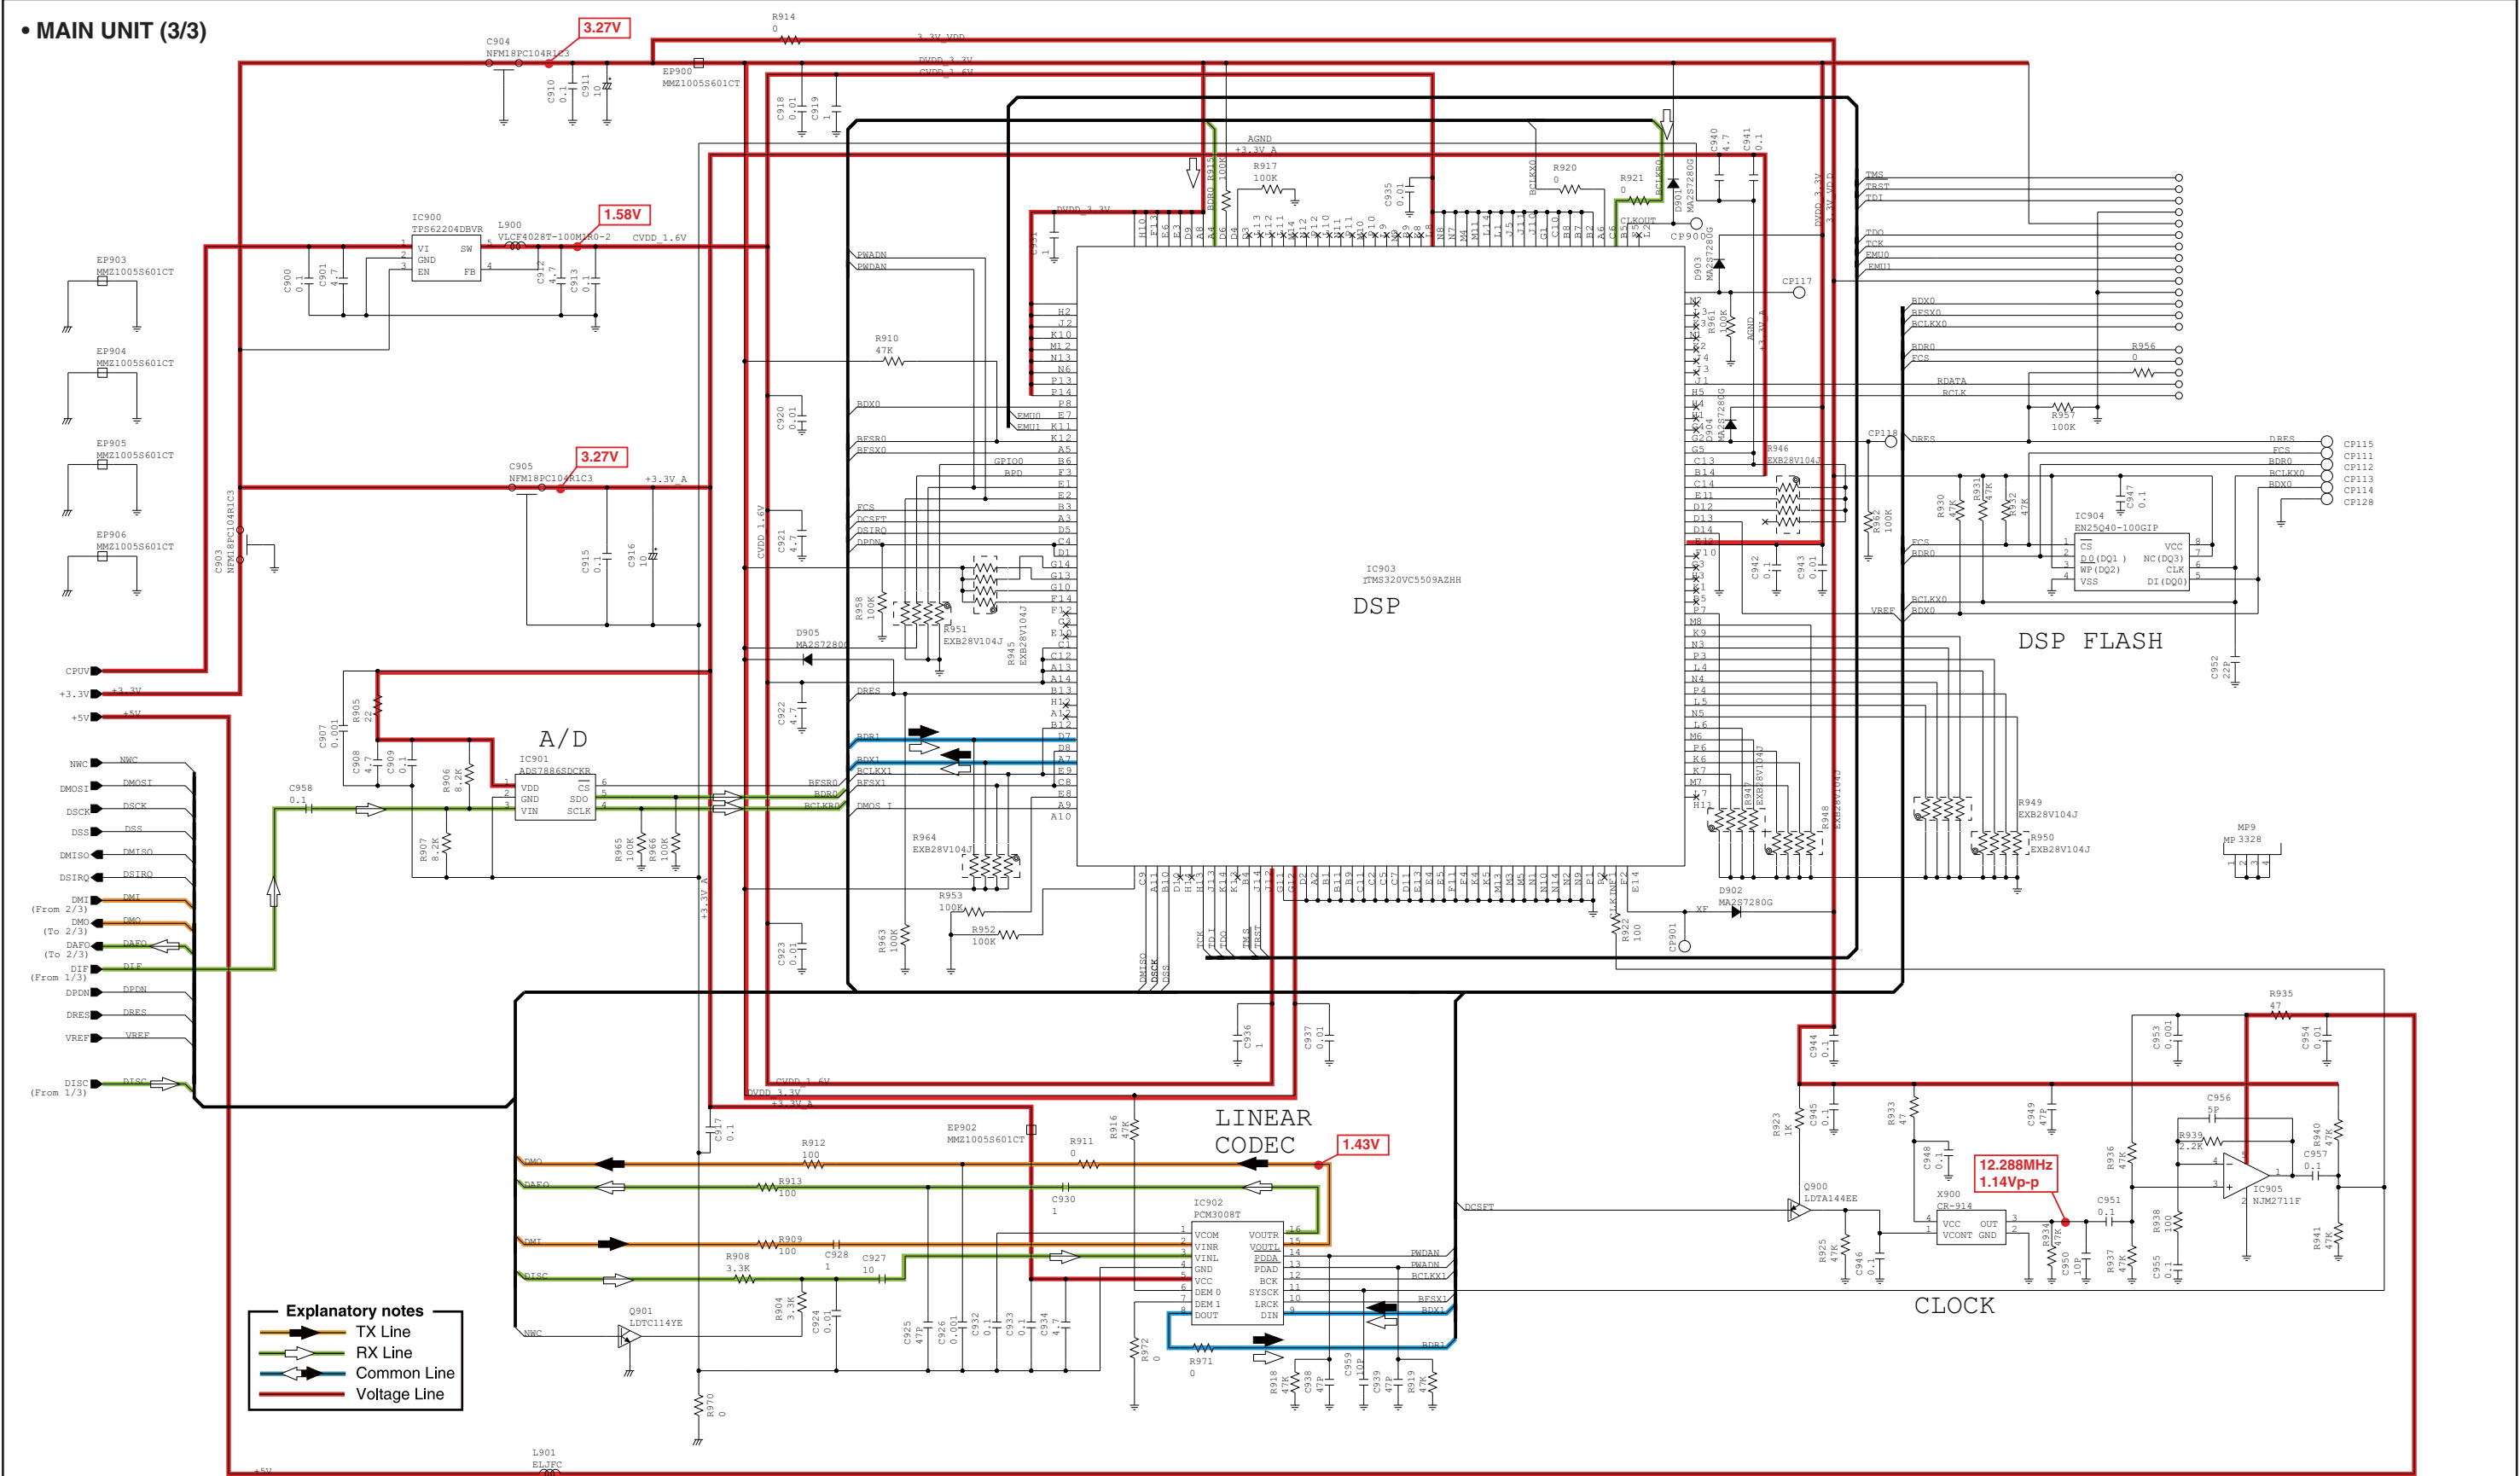

*: Refer to the PARTS LIST for the value and name of component.

IC-F3100D series

CONTENTS


REPLACEMENT PAGES	5-4 to 5-6
PARTS LIST	1
BOARD LAYOUTS	7
VOLTAGE DIAGRAM	9

[VERSION LIST]

Model	Version	Band High/Low	Channel spacing (kHz)
IC-F3101D	USA-01	136-174	6.25/12.5/25.0
IC-F3102D	EUR-01		6.25/12.5/20.0/25.0
	UK-01		6.25/12.5/25.0
IC-F3103D	EXP-01		
	EXP-02		
	AUS-01		
IC-F3106D	RUS-01		
IC-F3108D	CHN-01		

For [EUR] versions:

When adjusting “Deviation” in the middle band, change the bandwidth to “Middle” as shown below.

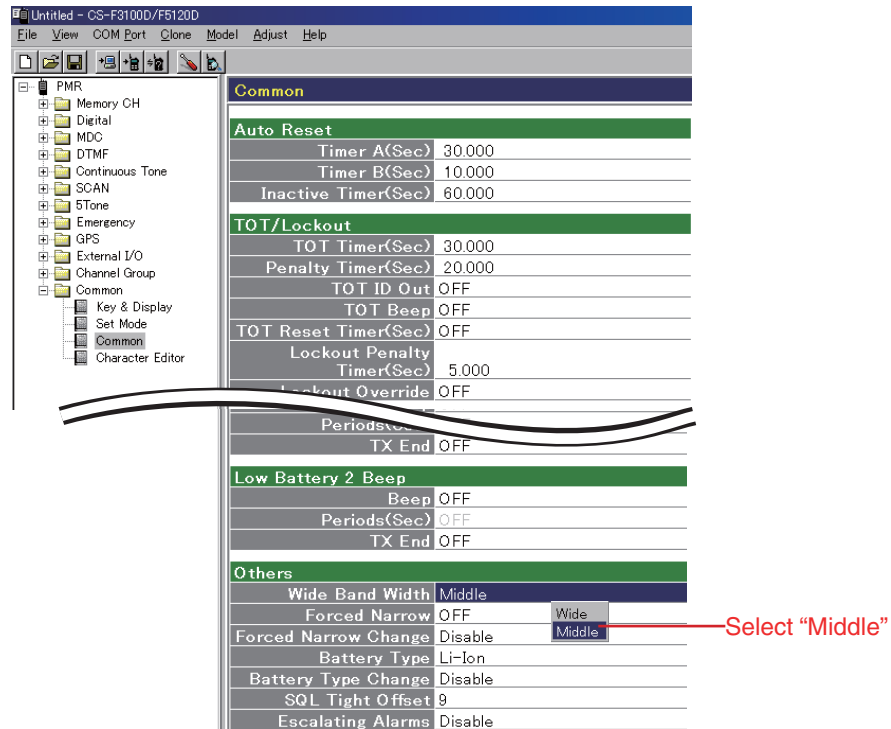


5-2 FREQUENCY ADJUSTMENTS

- 1) Select an adjustment item using [↑]/[↓] on the PC's keyboard.
- 2) Set or modify the adjustment value as specified using [←]/[→] on the PC's keyboard, then push [ENTER].

ADJUSTMENT	TRANSCEIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
PLL LOCK VOLTAGE (RX)	1 • Channel : 1-1 • Receiving	1) Connect an RF power meter to the antenna connector. 2) Set the preset adjustment value on the adjustment utility window.	[RX LVA(Adjust)]	3.70 V
(TX)	2 • Channel : 1-1 • Transmitting		[TX LVA(Adjust)]	3.50 V
(RX)	3 • Channel : 1-2 • Receiving	• Click the [Update (F5)] button to check on the "I/O Check window" as below.	[LVIN] (On the "I/O Check window")	0.9–1.6 V (Verify)
(TX)	4 • Channel : 1-2 • Transmitting			0.9–1.5 V (Verify)
REFERENCE FREQUENCY	1 • Channel : 1-1 • Transmitting	• Loosely couple a frequency counter to the antenna connector.	[REF]	174.000000 MHz (±250 Hz)

• I/O Check window

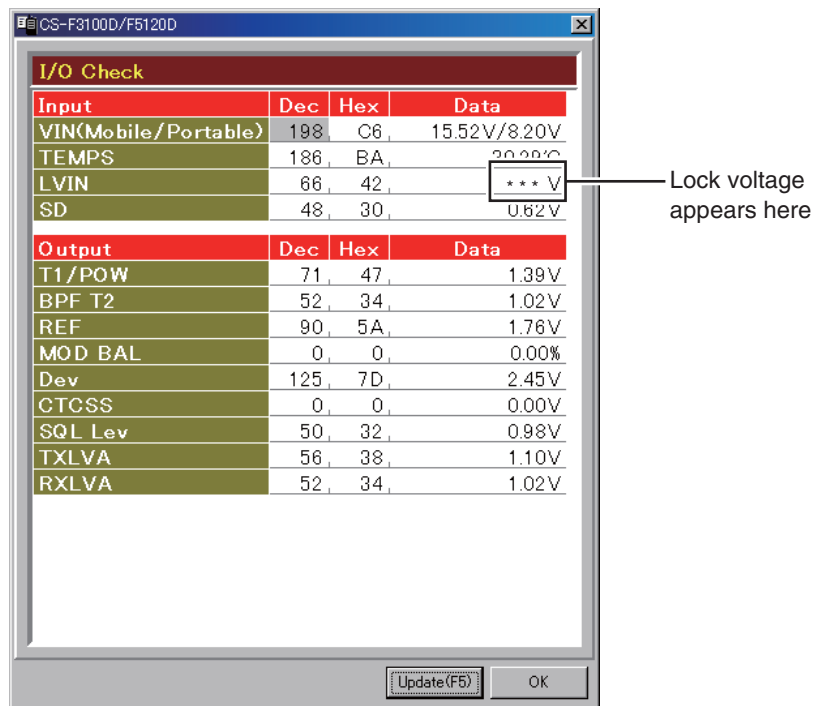

(The values shown above are an example only. Each transceiver has own values.)

5-3 TRANSMIT ADJUSTMENTS


- 1) Select an adjustment item using [↑]/[↓] on the PC's keyboard.
- 2) Set or modify the adjustment value as specified using [←]/[→] on the PC's keyboard, then push [ENTER].

ADJUSTMENT	TRANSCEIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
TX OUTPUT POWER (Hi power)	1 • Channel : 1-3 • Transmitting	• Connect an RF power meter to the antenna connector.	[Power (Hi)]	5.0 W
(L2 power)	2 • Channel : 1-4 • Transmitting		[Power (L2)]	2.0 W
(L1 power)	3 • Channel : 1-8 • Transmitting		[Power (L1)]	1.0 W

5-3 TRANSMIT ADJUSTMENTS (Continued)

1) Select an adjustment item using [↑]/[↓] on the PC's keyboard.

2) Set or modify the adjustment value as specified using [←]/[→] on the PC's keyboard, then push [ENTER].

ADJUSTMENT	TRANSCEIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
MODULATION BALANCE	1	• Set [MOD(NARROW)] to "80" on the "Adjust Utility" screen.	[MOD(NARROW)]	80
	2	• Set the TX mode to "2" on the "ADJUSTMENT UTILITY" screen.	[TX MODE]	2
	3	• Push [ENTER] on the PC's keyboard, to enter the modulation balance adjustment mode.	[BAL Start]	—
-Band low-	4	• Channel : 1-5 • Transmitting • Connect a modulation analyzer with an oscilloscope to the antenna connector through an attenuator, and set it as; HPF : OFF LPF : 15 kHz De-emphasis : OFF Detector : (P-P)/2	[BAL 1]	As flat as possible. 
-Band center-	5		[BAL 2]	
-Band high-	6		[BAL 3]	
	7		[BAL Start]	—
FM DEVIATION (Narrow)	1	• Channel : 1-4 • Transmitting	[MOD (Narrow)]	±2.05 to ±2.15 kHz*
(Wide)	2	• Channel : 1-6 • Transmitting		±2.20 to ±2.30 kHz**
(Middle)	3	• Channel : 1-4 • Transmitting		±4.05 to ±4.15 kHz*
		• Connect as audio generator to the [MIC] jack, and set it as; Frequency : 1 kHz Waveform : Sine wave Level : 150 mVrms	[MOD (Wide)]	±4.45 to ±4.55 kHz**
			[MOD (Middle)]	±3.55 to ±3.65 kHz**
DIGITAL DEVIATION (Narrow)	1	• Channel : 1-9 • Transmitting	[MOD D Start]	—
	2	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[MOD D L]	±1.36 to ±1.40 kHz
	3	• Channel : 1-10 • Transmitting	[MOD D C]	
	4	• Channel : 1-11 • Transmitting	[MOD D H]	
	5	• Push [ENTER] on the PC's keyboard, to store the value and quit the digital deviation adjustment mode.	[MOD D Start]	—
CTCSS DEVIATION	1	• Channel : 1-12 • No AF input from the MIC. • Transmitting	[CTCSS]	±0.65 to ±0.75 kHz
DTCS DEVIATION	1	• Channel : 1-13 • No AF input from the MIC. • Transmitting	[DTCS]	±0.65 to ±0.75 kHz
2/5 TONE, DTMF DEVIATION	1	• Channel : 1-11 • Transmitting	[S.Tone]	±1.45 to ±1.55 kHz
		1) Set the TX mode to "5" on the "ADJUSTMENT UTILITY" screen. 2) Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."		

*: For all models except [EUR], [UK]. **: For [EUR], [UK].

PARTS LIST

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110002751	S.IC TA75S01F(TE85RF)	T	32.5/8.9
IC3	1110007320	S.IC NJM2591V-TE1-#ZZZB	B	45.8/38.9
IC4	1130015271	S.IC AK1541P4-L	T	43.2/24.0
IC5	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	68.3/44.2
IC6	1130011741	S.IC TC7W66FK(TE85LF)	B	65.3/26.7
IC21	1110002751	S.IC TA75S01F(TE85RF)	T	69.8/34.6
IC51	1140015010	S.IC HD64F2506RBR26DV(EMPTY)	B	83.0/14.3
IC52	1130015080	S.IC R1EX24512ASAS0A	T	83.7/16.4
IC53	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	T	85.0/11.3
IC54	1180003600	S.REG NJM2871BF05-TE1-#ZZZB	T	15.5/34.9
IC55	1110007610	S.IC TPA0211DGNR	B	13.3/42.1
IC57	1110007290	S.IC AK2330P-L	B	72.3/24.5
IC58	1110002751	S.IC TA75S01F(TE85RF)	T	23.9/28.3
IC60	1110005320	S.IC NJM13403V-TE1-#ZZZB	B	65.1/8.3
IC62	1130011741	S.IC TC7W66FK(TE85LF)	T	60.9/11.3
IC63	1110007630	S.IC NJM2783V-TE1-#ZZZH	T	71.9/9.8
IC64	1110005330	S.IC NJM12904V-TE1-#ZZZB	T	67.1/9.8
IC65	1180003670	S.REG BD9141MUV-E2	T	96.5/9.1
IC66	1130009981	S.IC TC7W53FK(TE85LF)	T	75.9/8.5
IC900	1180003680	S.REG TPS62204DBVR	T	76.4/39.0
IC901	1190002900	S.IC ADS7886SDCKR	T	77.5/32.5
IC902	1110007770	S.IC PCM3008T/2K	B	78.6/34.7
IC903	1140013290	S.IC TMS320VC5509AZHH	T	86.8/36.8
IC904	1130015620	S.IC EN25Q40-100GIP <MSK>	T	78.0/28.4
IC905	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	80.2/46.0
Q1	1560001700	S.FET RD07MUS2B-T112	B	28.6/13.5
Q2	1560001241	S.FET RD01MUS1-T113	B	36.3/14.4
Q3	1530003311	S.TRA 2SC5107-O(TE85RF)	B	42.2/13.1
Q6	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	35.6/5.7
Q8	1530003311	S.TRA 2SC5107-O(TE85RF)	T	54.8/18.5
Q9	1530003311	S.TRA 2SC5107-O(TE85RF)	B	55.9/18.5
Q10	1530003311	S.TRA 2SC5107-O(TE85RF)	T	60.7/18.5
Q11	1590004070	S.TRA LDTCT144EET1G <SLVJ>	B	54.9/23.8
Q12	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	62.5/23.3
Q13	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	57.5/23.6
Q14	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	60.0/23.6
Q15	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	64.2/18.7
Q16	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	68.2/21.9
Q17	1560000541	S.FET 2SK880-Y(T5R1COMF)	B	50.9/29.7
Q21	1560000841	S.FET 2SK1829(TE85RF)	B	28.4/30.5
Q22	1580000731	S.FET 3SK293(TE85LF)	B	25.1/27.8
Q23	1580000731	S.FET 3SK293(TE85LF)	B	36.4/26.1
Q24	1530003311	S.TRA 2SC5107-O(TE85RF)	B	38.3/42.6
Q26	1530002851	S.TRA 2SC4116-BL(TE85RF)	T	43.3/32.7
Q27	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	56.3/35.9
Q28	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	63.6/44.7
Q29	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	38.5/42.6
Q51	1510001090	S.TRA KTA2015Y-RTK/P	B	25.7/43.5
Q52	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	24.6/39.8
Q58	1590004220	S.TRA DRA9123YOL	B	54.9/7.1
Q59	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	49.1/7.3
Q63	1520000460	S.TRA 2SB1132 T100 R	B	15.3/35.5
Q64	1590001190	S.TRA XP6501-(TX).AB [USA-01]	B	19.3/36.0
	1590004590	S.TRA DMC506010R [EUR-01]		
	1590004590	S.TRA DMC506010R [UK-01]		
	1590001190	S.TRA XP6501-(TX).AB [EXP-01]		
	1590001190	S.TRA XP6501-(TX).AB [EXP-02]		
	1590001190	S.TRA XP6501-(TX).AB [AUS-01]		
	1590001190	S.TRA XP6501-(TX).AB [RUS-01]		
	1590004590	S.TRA DMC506010R [CHN-01]		
Q67	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	75.4/13.1
Q71	1510001090	S.TRA KTA2015Y-RTK/P	B	66.9/16.6
Q72	1510000771	S.TRA 2SA1586-GR(TE85LF)	B	65.8/37.4
Q73	1510001090	S.TRA KTA2015Y-RTK/P	B	70.2/12.5
Q81	1590004100	S.TRA LDTCT144TET1G <SLVJ>	B	93.4/20.3
Q82	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	79.1/19.5
Q83	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	78.5/17.5
Q84	1590004070	S.TRA LDTCT144EET1G <SLVJ>	B	19.2/43.8
Q85	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	21.5/33.0
Q86	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	70.6/16.3
Q87	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	68.5/35.7
Q88	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	72.5/12.3
Q90	1510000920	S.TRA 2SA1577 T100 Q	T	92.4/12.8
Q91	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	90.1/14.8
Q92	1590003321	S.FET TPC6103(TE85LF)	B	6.9/35.0
Q93	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	4.0/34.6
Q95	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	68.5/33.2
Q900	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	73.5/48.8
Q901	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	75.1/27.8
D1	1750001910	S.DIO HVD144AKRF-E	B	16.2/16.3
D5	1750001890	S.DIO HVD142AKRF-E	B	49.6/15.2
D6	1750001890	S.DIO HVD142AKRF-E	B	49.6/16.6
D7	1750001820	S.DIO LRB706F-40T1G <SLVJ>	T	17.9/10.5
D8	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	14.5/14.2
D10	1790001241	S.DIO MA2S7280GL [USA-01]	B	63.1/16.7
	1750002170	S.DIO DB2S31400L [EUR-01]		
	1750002170	S.DIO DB2S31400L [UK-01]		
	1790001241	S.DIO MA2S7280GL [EXP-01]		
	1790001241	S.DIO MA2S7280GL [EXP-02]		
	1790001241	S.DIO MA2S7280GL [AUS-01]		
	1790001241	S.DIO MA2S7280GL [RUS-01]		
D11	1750001880	S.VAR HVL375CKRF-E	T	57.4/29.2
D12	1750001550	S.VAR HVD376BKRF-E	T	54.1/25.6

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
D13	1750001550	S.VAR HVD376BKRF-E	T	55.1/25.6
D14	1750001880	S.VAR HVL375CKRF-E	T	59.3/27.1
D15	1750001570	S.VAR HVL355CMKRF-E	T	59.3/29.2
D16	1750001550	S.VAR HVD376BKRF-E	T	63.7/25.1
D17	1750001550	S.VAR HVD376BKRF-E	T	62.8/23.2
D21	1750001810	S.DIO L1SS400T1G <SLVJ>	B	30.3/32.4
D22	1750001910	S.DIO HVD144AKRF-E	B	16.2/20.5
D23	1750001910	S.DIO HVD144AKRF-E	B	14.1/23.1
D24	1750001880	S.VAR HVL375CKRF-E	B	17.4/27.8
D26	1750001880	S.VAR HVL375CKRF-E	B	18.6/27.8
D28	1750001780	S.VAR HVB350BYPTL-E	B	31.0/27.8
D31	1750001910	S.DIO HVD144AKRF-E	B	40.3/30.1
D32	1750001910	S.DIO HVD144AKRF-E	T	36.6/28.4
D33	1750001910	S.DIO HVD144AKRF-E	B	36.7/39.8
D34	1750001910	S.DIO HVD144AKRF-E	T	36.5/41.0
D36	1750001790	S.DIO 1SS390 TE61	B	51.1/40.0
D37	1750001790	S.DIO 1SS390 TE61	B	51.7/36.8
D38	1750001790	S.DIO 1SS390 TE61	B	56.6/40.0
D39	1750001790	S.DIO 1SS390 TE61	B	58.1/38.6
D51	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	91.9/17.8
D52	1790001241	S.DIO MA2S7280GL [USA-01]	B	26.2/41.0
	1750002170	S.DIO DB2S31400L [EUR-01]		
	1750002170	S.DIO DB2S31400L [UK-01]		
	1790001241	S.DIO MA2S7280GL [EXP-01]		
	1790001241	S.DIO MA2S7280GL [EXP-02]		
	1790001241	S.DIO MA2S7280GL [AUS-01]		
	1790001241	S.DIO MA2S7280GL [RUS-01]		
	1790001241	S.DIO MA2S7280GL [CHN-01]		
D53	1750001810	S.DIO L1SS400T1G <SLVJ>	T	61.8/6.8
D54	1750001810	S.DIO L1SS400T1G <SLVJ>	T	60.5/6.8
D55	1750001810	S.DIO L1SS400T1G <SLVJ>	T	22.8/34.9
D59	1750001850	S.DIO LDAN222T1G <SLVJ>	B	4.2/37.5
D60	1750001790	S.DIO 1SS390 TE61	B	85.0/23.6
D901	1790001241	S.DIO MA2S7280GL [USA-01]	T	87.1/27.9
	1750002170	S.DIO DB2S31400L [EUR-01]		
	1750002170	S.DIO DB2S31400L [UK-01]		
	1790001241	S.DIO MA2S7280GL [EXP-01]		
	1790001241	S.DIO MA2S7280GL [EXP-02]		
	1790001241	S.DIO MA2S7280GL [AUS-01]		
	1790001241	S.DIO MA2S7280GL [RUS-01]		
	1790001241	S.DIO MA2S7280GL [CHN-01]		
D902	1790001241	S.DIO MA2S7280GL [USA-01]	B	86.2/44.9
	1750002170	S.DIO DB2S31400L [UK-01]		
	1790001241	S.DIO MA2S7280GL [EXP-01]		
	1790001241	S.DIO MA2S7280GL [EXP-02]		
	1790001241	S.DIO MA2S7280GL [AUS-01]		
	1790001241	S.DIO MA2S7280GL [RUS-01]		
	1790001241	S.DIO MA2S7280GL [CHN-01]		
D903	1790001241	S.DIO MA2S7280GL [USA-01]	B	92.1/30.8
	1750002170	S.DIO DB2S31400L [EUR-01]		
	1750002170	S.DIO DB2S31400L [UK-01]		
	1790001241	S.DIO MA2S7280GL [EXP-01]		
	1790001241	S.DIO MA2S7280GL [EXP-02]		
	1790001241	S.DIO MA2S7280GL [AUS-01]		
	1790001241	S.DIO MA2S7280GL [RUS-01]		
	1790001241	S.DIO MA2S7280GL [CHN-01]		
D904	1790001241	S.DIO MA2S7280GL [USA-01]	T	88.4/27.9
	1750002170	S.DIO DB2S31400L [EUR-01]		
	1750002170	S.DIO DB2S31400L [UK-01]		
	1790001241	S.DIO MA2S7280GL [EXP-01]		
	1790001241	S.DIO MA2S7280GL [EXP-02]		
	1790001241	S.DIO MA2S7280GL [AUS-01]		
	1790001241	S.DIO MA2S7280GL [RUS-01]		
	1790001241	S.DIO MA2S7280GL [CHN-01]		
D905	1790001241	S.DIO MA2S7280GL [USA-01]	B	96.3/30.8
	1750002170	S.DIO DB2S31400L [EUR-01]		
	1750002170	S.DIO DB2S31400L [UK-01]		
	1790001241	S.DIO MA2S7280GL [EXP-01]		
	1790001241	S.DIO MA2S7280GL [EXP-02]		
	1790001241	S.DIO MA2S7280GL [AUS-01]		
	1790001241	S.DIO MA2S7280GL [RUS-01]		
	1790001241	S.DIO MA2S7280GL [CHN-01]		
F11	2030000870	S.MON MFT46.3P3 46.350 MHz (FL-442)	B	35.4/34.1
F12	2010002760	S.XTA MFT46.3J 46.350 MHz (FL-448)	T	36.6/34.5
F13	2020002410	CER LTM450FW <JJE>		
F14	2020002570	CER LTM450HW <JJE>		
F15	2020002610	S.CER LTUCG450G <JJE>	T	65.2/43.3
X1	6070000310	S.DIS JTBM450CX70 <JJE>	T	47.6/40.9

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
X2	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz [USA-01]	T	41.9/15.0
	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz [EUR-01]		
	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz [UK-01]		
	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz [EXP-01]		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [EXP-02]		
	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz [AUS-01]		
	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz [RUS-01]		
	6050012380	S.XTA CR-826 DSA535SD 15.3 MHz [CHN-01]		
X51	6050013160	S.XTA CR-912 TSS3225A 19.6608 MHz	T	81.8/21.4
X900	6050013170	S.XTA CR-914 TTS18VSE-A11 12.288 MHz	B	75.1/46.0
L1	6200012780	S.COI 0.30-1.4-6TL 27.2N <COMO>	B	9.4/7.9
L2	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	9.6/11.7
L3	6200012910	S.COI 0.35-1.6-8TL 45.5N <COMO>	B	11.2/15.6
L4	6200002861	S.COI NLV25T-4R7J	B	18.4/17.8
L5	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	18.4/14.1
L6	6200012390	S.COI 0.30-0.92-3TR 5.8N <COMO>	B	22.0/14.1
L7	6200013010	S.COI 0.30-0.9-5TL 10.3N <COMO>	B	24.3/15.3
L8	6200013100	S.COI 0.45-1.5-5TL 18.3N <COMO>	B	25.2/19.0
L9	6200007871	S.COI ELJRF 39NJFB	B	42.2/11.3
L11	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	14.1/19.6
L12	6200011021	S.COI ELJRF 82NJFB	B	12.4/22.8
L13	6200008090	S.COI LQW2BHN68NJ03L	B	14.4/26.8
L14	6200008090	S.COI LQW2BHN68NJ03L	B	21.1/26.8
L15	6200010910	S.COI LQW18AN56NG00D	B	27.1/27.8
L16	6200010910	S.COI LQW18AN56NG00D	B	33.3/27.5
L18	6200007901	S.COI ELJRF 22NJFB	B	32.8/13.4
L19	6200011011	S.COI ELJRF 68NJFB	B	34.4/23.9
L20	6200004770	S.COI ELJNC R56J-F	B	39.1/26.4
L23	6200012170	S.COI MLG1608S R18J-T	T	41.9/35.7
L24	6200012170	S.COI MLG1608S R18J-T	T	45.2/34.2
L31	6200011031	S.COI ELJRF R10JFB	T	56.6/17.7
L32	6200011031	S.COI ELJRF R10JFB	B	56.5/20.4
L33	6200011031	S.COI ELJRF R10JFB	T	62.5/17.7
L34	6190002030	S.COI MLG1608S 1R0J-T	B	59.9/28.5
L35	6200008090	S.COI LQW2BHN68NJ03L	T	55.7/27.7
L36	6200003640	S.COI MLF1608E 100K-T	T	53.0/25.6
L37	6200007720	S.COI LQW2BHN33NJ03L	T	53.8/22.6
L38	6190002030	S.COI MLG1608S 1R0J-T	B	50.6/25.7
L39	6190002030	S.COI MLG1608S 1R0J-T	B	60.8/27.0
L40	6200007760	S.COI LQW2BHN82NJ03L	T	62.9/27.9
L41	6200003640	S.COI MLF1608E 100K-T	T	64.6/27.5
L42	6200008090	S.COI LQW2BHN68NJ03L	T	64.3/20.6
L43	6190002030	S.COI MLG1608S 1R0J-T	B	60.0/22.7
L46	6200007881	S.COI ELJRF 33NJFB	B	48.8/20.1
L51	6200014170	S.COI VLCF4028T-4R7N1R5-2	T	96.5/14.3
L900	6200014160	S.COI VLCF4028T-100M1R0-2	T	77.6/42.9
L901	6200007830	S.COI ELJFC 4R7K-F	B	84.5/48.0
R1	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	9.1/5.7
R2	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/19.2
R3	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/18.3
R7	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	34.0/5.7
R8	7030005220	S.RES ERJ2GEJ 222 X (2.2K)	T	31.1/5.7
R9	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	31.1/6.6
R10	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	33.0/11.5
R11	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	32.1/11.5
R12	7030005110	S.RES ERJ2GEJ 224 X (220K)	T	32.8/5.7
R13	7030005530	S.RES ERJ2GEJ 100 X (10)	T	34.8/9.9
R14	7030004980	S.RES ERJ2GEJ 101 X (100)	T	35.4/7.5
R15	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	36.3/7.1
R16	7030010040	S.RES ERJ2GEJ-JPW	T	29.4/7.1
R19	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	15.2/11.4
R20	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/12.3
R21	7030007250	S.RES ERJ2GEJ 220 X (22)	B	32.3/10.9
R22	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	31.0/9.2
R23	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	33.7/10.4
R24	7030005590	S.RES ERJ2GEJ 680 X (68)	B	38.4/10.9
R25	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	40.2/10.9
R26	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	38.4/9.2
R27	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	15.2/12.3
R28	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/13.2
R31	7030005530	S.RES ERJ2GEJ 100 X (10)	B	42.2/14.9
R32	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	44.0/14.9
R33	7030004980	S.RES ERJ2GEJ 101 X (100)	B	44.6/13.1
R35	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	46.4/14.0
R36	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.6/13.1
R37	7030004980	S.RES ERJ2GEJ 101 X (100)	B	49.6/14.0
R38	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.8/15.2
R41	7030005530	S.RES ERJ2GEJ 100 X (10)	T	53.0/17.7
R42	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	56.6/19.4
R44	7030005530	S.RES ERJ2GEJ 100 X (10)	B	56.5/21.3
R45	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	57.7/18.6
R47	7030004980	S.RES ERJ2GEJ 101 X (100)	T	63.4/17.7
R48	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	62.5/19.3
R51	7030008370	S.RES ERJ2GEJ 561 X (560)	B	56.5/22.9
R52	7030008370	S.RES ERJ2GEJ 561 X (560)	B	60.8/24.1
R53	7030008340	S.RES RR0510P-182-D (1.8K)	T	55.7/23.7
R54	7030011000	S.RES RR0510P-392-D (3.9K)	T	57.9/25.9
R55	7030008340	S.RES RR0510P-182-D (1.8K)	T	61.8/23.7
R56	7030011000	S.RES RR0510P-392-D (3.9K)	T	58.9/25.9
R57	7030009320	S.RES ERJ2GEJ 4R7 X (4.7)	T	60.7/25.9
R58	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.6/27.2
R59	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	62.6/25.6

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R62	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	68.0/27.2
R65	7030005720	S.RES ERJ2GEJ 563 X (56K)	B	64.7/30.9
R66	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	64.7/30.0
R67	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	62.4/18.0
R68	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	63.1/30.9
R69	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	63.1/31.8
R70	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	63.6/28.8
R71	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.1/28.7
R72	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.1/27.9
R73	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	54.6/29.9
R74	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	52.8/29.9
R76	7030004990	S.RES ERJ2GEJ 221 X (220)	T	48.4/25.0
R77	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.9
R78	7030010040	S.RES ERJ2GEJ-JPW	T	46.7/23.8
R79	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.0
R80	7410001130	S.ARR EXB28V102JX	T	41.9/27.8
R81	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	46.4/22.0
R82	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	40.1/18.8
R83	7030004970	S.RES ERJ2GEJ 470 X (47)	T	43.8/19.3
R84	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	40.1/23.7
R87	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	61.5/30.0
R88	7510001730	S.THE ERTJOEP 473J	T	58.8/9.8
R89	7030010080	S.RES ERJ2RHD 1003X (100K)	B	58.3/12.6
R101	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	28.3/32.7
R102	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	29.2/30.7
R103	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	31.0/30.7
R104	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	17.4/26.0
R105	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	18.3/26.0
R106	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	22.9/26.9
R107	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	22.6/30.0
R108	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	22.9/28.7
R109	7030005530	S.RES ERJ2GEJ 100 X (10)	B	23.5/30.0
R110	7030008280	S.RES ERJ2GEJ 271 X (270)	B	23.5/25.6
R111	7030005110	S.RES ERJ2GEJ 224 X (220K)	B	24.4/30.0
R112	7030004970	S.RES ERJ2GEJ 470 X (47)	B	27.1/25.6
R113	7030008370	S.RES ERJ2GEJ 561 X (560)	[USA-01]	
	7030005000	S.RES ERJ2GEJ 471 X (470)	[EUR-01]	
	7030005000	S.RES ERJ2GEJ 471 X (470)	[UK-01]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[EXP-01]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[EXP-02]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[AUS-01]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[RUS-01]	
	7030008370	S.RES ERJ2GEJ 561 X (560)	[CHN-01]	
R114	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	30.1/25.6
R115	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	31.0/25.6
R116	7030005080	S.RES ERJ2GEJ 823 X (82K)	B	34.7/28.8
R117	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	33.4/23.9
R118	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	36.4/23.9
R119	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	36.3/27.9
R120	7030005590	S.RES ERJ2GEJ 680 X (68)	B	39.2/23.9
R121	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.0/26.3
R122	7030004970	S.RES ERJ2GEJ 470 X (47)	B	41.9/23.9
R123	7030010040	S.RES ERJ2GEJ-JPW	T	71.2/30.6
R126	7030004980	S.RES ERJ2GEJ 101 X (100)	B	39.5/40.8
R127	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	37.9/40.8
R128	7030007280	S.RES ERJ2GEJ 331 X (330)	B	39.1/44.4
R129	7030005000	S.RES ERJ2GEJ 471 X (470)	B	37.4/22.3
R130	7030005530	S.RES ERJ2GEJ 100 X (10)	B	36.4/22.3
R131	7030005000	S.RES ERJ2GEJ 471 X (470)	B	35.4/22.3
R132	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	47.4/17.6
R134	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	91.6/14.8
R135	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	43.1/37.7
R136	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	42.9/38.9
R138	7030005000	S.RES ERJ2GEJ 471 X (470)	B	43.0/35.5
R139	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	48.3/35.5
R140	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	46.5/34.6
R141	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	46.5/33.7
R142	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	46.5/31.0
R146	7030004970	S.RES ERJ2GEJ 470 X (47)	B	45.6/44.9
R147	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	47.1/42.2
R148	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.9/37.3
R149	7030007060	S.RES ERJ2GEJ 684X (680K)	T	41.5/32.3
R151	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	51.7/39.0
R152	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	53.9/35.1
R153	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	55.5/38.7
R154	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	57.8/36.9
R155	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	58.8/39.8
R156	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	21.4/25.5
R157	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	31.0/23.9
R158	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	59.7/35.7
R161	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	62.4/42.8
R162	7030004980	S.RES ERJ2GEJ 101 X (100)	B	64.0/42.8
R163	7030004980	S.RES ERJ2GEJ 101 X (100)	B	69.7/46.4
R164	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	67.3/41.0
R165	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	65.7/44.6
R166	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	65.7/43.7
R167	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	65.7/42.8
R169	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	64.0/41.0
R171	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	36.6

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R190	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	65.7/46.4
R243	7030005530	S.RES ERJ2GEJ 100 X (10)	B	82.1/21.9
R244	7030005160	S.RES ERJ2GEJ 105 X (1M)	B	83.0/21.9
R358	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/8.7
R359	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/10.5
R360	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	56.0/9.6
R361	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	24.8/41.7
R362	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	51.6/7.5
R363	7030005000	S.RES ERJ2GEJ 471 X (470)	B	58.3/8.6
R364	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	55.3/2.2
R365	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	26.2/38.9
R366	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	58.3/10.2
R367	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	53.6/2.2
R368	7030005700	S.RES ERJ2GEJ 274 X (270K)	T	58.3/12.5
R369	7030005100	S.RES ERJ2GEJ 154 X (150K)	T	63.5/10.6
R370	7030005170	S.RES ERJ2GEJ 474 X (470K)	T	68.0/14.1
R371	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.3/11.6
R372	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.3/10.7
R373	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	75.4/11.6
R388	7030011120	S.RES ERJ2RHD 2702X (27.0K)	T	73.9/20.9
R389	7030012510	S.RES ERJ2RHD 3901X (3.90K)	T	71.0/20.2
R390	7030012520	S.RES ERJ2RHD 8201X (8.20K)	T	71.4/21.5
R393	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	61.7/8.9
R394	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	59.9/7.3
R395	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	60.8/8.9
R396	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.8/7.3
R397	7030008310	S.RES ERJ2GEJ 564 X (560K)	B	59.7/5.7
R398	7030008310	S.RES ERJ2GEJ 564 X (560K)	B	61.7/7.3
R405	7030011290	S.RES ERJ12YJ1R8U (1.8)	T	31.5/35.6
R406	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	12.6/45.7
R408	7030004980	S.RES ERJ2GEJ 101 X (100)	B	35.6/46.3
R412	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	15.9/39.5
R413	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	19.1/34.7
R414	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	20.7/34.1
R416	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	21.5/36.0
R417	7030007570	S.RES ERJ2GEJ 122 X (1.2K)	B	21.3/37.2
R418	7030009280	S.RES ERJ2GEJ 391 X	B	19.8/37.9
R420	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	89.8/25.2
R421	7210003390	VAR F081165S-5 A10K L15FCX7 <SLV>		
R422	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	64.6/6.9
R423	7030012530	S.RES ERJ2RHD 3302X (33.0K)	T	6.2/36.5
R424	7030012540	S.RES ERJ2RHD 1502X (15.0K)	T	4.8/38.4
R426	7030009140	S.RES ERJ2GEJ 272 X (2.7K)	T	66.4/3.5
R427	7030007340	S.RES ERJ2GEJ 153 X (15K)	T	64.8/3.5
R428	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	64.8/5.5
R429	7030008310	S.RES ERJ2GEJ 564 X (560K)	T	66.4/5.5
R430	7030005160	S.RES ERJ2GEJ 105 X (1M)	T	63.2/4.5
R431	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	68.9/15.7
R432	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	68.9/17.3
R433	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	67.8/37.8
R434	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	68.7/37.8
R435	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	70.6/14.4
R436	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	72.2/13.9
R437	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	15.0/37.1
R439	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	63.2/5.5
R440	7030009280	S.RES ERJ2GEJ 391 X	B	17.4/43.5
R441	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	19.1/33.8
R442	7030007280	S.RES ERJ2GEJ 331 X (330)	B	21.5/35.1
R444	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	90.4/12.8
R451	7030005060	S.RES ERJ2GEJ 333 X (33K)	T	24.6/30.5
R452	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/30.5
R453	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/29.6
R454	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	23.0/30.5
R468	7030005010	S.RES ERJ2GEJ 681 X (680)	T	75.6/19.8
R469	7030008280	S.RES ERJ2GEJ 271 X (270)	T	77.5/20.4
R491	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	71.5/8.0
R492	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	T	72.0/3.7
R493	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	70.3/4.6
R494	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	70.3/5.5
R495	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	70.7/7.1
R496	7030005080	S.RES ERJ2GEJ 823 X (82K)	T	73.7/5.5
R497	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	66.4/13.0
R498	7030008290	S.RES ERJ2GEJ 183 X (18K)	T	71.6/14.5
R499	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	71.5/8.9
R500	7030007350	S.RES ERJ2GEJ 393 X (39K)	B	70.2/9.9
R502	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	69.9/9.9
R503	7030004980	S.RES ERJ2GEJ 101 X (100)	B	61.9/11.6
R504	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	67.3/13.0
R517	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	B	63.3/13.5
R518	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.1/14.8
R527	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	64.6/13.0
R610	7030005080	S.RES ERJ2GEJ 823 X (82K)	T	65.3/13.0
R611	7030010040	S.RES ERJ2GEJ-JPW	T	64.6/10.6
R612	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	64.6/8.6
R614	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	62.1/13.1
R615	7030005220	S.RES ERJ2GEJ 223 X (22K)	B	69.6/6.2
R616	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	68.4/8.3
R618	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	67.4/3.9
R619	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	68.4/5.1
R620	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	92.7/10.0
R621	7030007340	S.RES ERJ2GEJ 153 X (15K)	T	93.6/10.0
R622	7030008290	S.RES ERJ2GEJ 183 X (18K)	T	92.7/8.0
R623	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	T	6.4/46.2
R624	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	90.4/11.2
R625	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	7.8/37.2
R626	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	6.2/37.2
R627	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/21.3
R628	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	88.2/17.0
R630	7030010040	S.RES ERJ2GEJ-JPW	B	63.3/14.9
R631	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	85.3/25.0
R632	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	82.9/23.1
R633	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	85.7/21.9
R634	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	82.7/11.4
R635	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.2/15.5

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R636	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.0/14.3
R637	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	87.3/19.7
R638	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.4/16.1
R639	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.6/15.7
R640	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	74.8/12.9
R641	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/22.2
R646	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	92.0/23.0
R647	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.2/22.2
R651	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	86.8/13.5
R652	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	91.1/22.2
R653	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	84.8/21.9
R657	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	84.9/13.1
R661	7410001130	S.ARR EXB28V102JX	B	90.9/12.3
R662	7410001130	S.ARR EXB28V102JX	B	90.9/14.8
R663	7410001130	S.ARR EXB28V102JX	B	88.4/22.3
R664	7410001150	S.ARR EXB28V471JX	B	80.2/22.3
R665	7410001130	S.ARR EXB28V102JX	B	77.2/22.3
R666	7410001130	S.ARR EXB28V102JX	B	75.3/10.9
R667	7410001130	S.ARR EXB28V102JX	B	79.4/6.4
R668	7410001130	S.ARR EXB28V102JX	B	82.4/6.4
R669	7410001130	S.ARR EXB28V102JX	B	85.2/6.4
R683	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.7/19.7
R688	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	81.0/13.7
R691	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	83.1/12.7
R692	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	92.2/20.6
R693	7030007340	S.RES ERJ2GEJ 153 X (15K)	B	93.6/21.9
R694	7030012540	S.RES ERJ2RHD 1502X (15.0K)	B	91.9/20.5
R904	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	73.6/30.0
R905	7030007250	S.RES ERJ2GEJ 220 X (22)	T	75.2/33.2
R906	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	T	75.2/34.1
R907	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	76.1/30.2
R908	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	T	71.6/31.9
R909	7030004980	S.RES ERJ2GEJ 101 X (100)	B	76.1/29.3
R910	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	79.4/32.0
R911	7030010040	S.RES ERJ2GEJ-JPW	B	83.3/33.6
R912	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.2/29.5
R913	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.2/30.4
R914	7030010040	S.RES ERJ2GEJ-JPW	B	75.9/42.5
R915	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	84.8/34.2
R916	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	79.0/38.0
R917	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	85.2/32.5
R918	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	86.4/31.5
R919	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	80.7/29.9
R920	7030010040	S.RES ERJ2GEJ-JPW	B	82.4/28.6
R921	7030010040	S.RES ERJ2GEJ-JPW	T	79.8/31.7
R922	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.5/35.2
R923	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	72.3/46.3
R925	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	75.5/49.3
R930	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	83.0/28.9
R931	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	82.1/28.2
R932	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	82.1/29.8
R933	7030004970	S.RES ERJ2GEJ 470 X (47)	B	72.3/45.4
R934	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	76.9/48.6
R935	7030004970	S.RES ERJ2GEJ 470 X (47)	B	81.4/48.6
R936	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	79.6/48.6
R937	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	78.7/48.6
R938	7030004980	S.RES ERJ2GEJ 101 X (100)	B	79.9/43.8
R939	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	79.9/42.0
R940	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	76.8/41.8
R941	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	77.7/42.5
R945	7410001140	S.ARR EXB28V104JX	T	86.5/43.9
R946	7410001140	S.ARR EXB28V104JX	B	82.9/41.4
R947	7410001140	S.ARR EXB28V104JX	B	92.3/37.0
R948	7410001140	S.ARR EXB28V104JX	B	87.8/35.8
R949	7410001140	S.ARR EXB28V104JX	B	93.9/33.0
R950	7410001140	S.ARR EXB28V104JX	B	88.4/33.3
R951	7410001140	S.ARR EXB28V104JX	T	84.8/29.0
R952	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.1/36.8
R953	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.8/37.7
R956	7030010040	S.RES ERJ2GEJ-JPW	B	96.3/32.9
R957	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	94.7/30.9
R958	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	85.7/42.4
R961	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	90.9/30.9
R962	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	89.5/28.4
R963	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	95.4/32.9
R964	7410001140	S.ARR EXB28V104JX	B	85.9/39.4
R965	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	79.2/29.3
R966	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	77.9/29.8
R968	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	88.9/18

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C22	4030007040	S.CER C1608 CH 1H 180J-T [EUR-01]	B	22.0/12.4
C23	4030007040	S.CER C1608 CH 1H 180J-T [UK-01]	B	22.7/10.4
	4030007050	S.CER C1608 CH 1H 220J-T [USA-01]		
	4030008560	S.CER C1608 CH 1H 300J-T [EUR-01]		
	4030008560	S.CER C1608 CH 1H 300J-T [UK-01]		
	4030007050	S.CER C1608 CH 1H 220J-T [EXP-01]		
	4030007050	S.CER C1608 CH 1H 220J-T [EXP-02]		
	4030007050	S.CER C1608 CH 1H 220J-T [AUS-01]		
	4030007050	S.CER C1608 CH 1H 220J-T [RUS-01]		
	4030007050	S.CER C1608 CH 1H 220J-T [CHN-01]		
C24	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/11.4
C25	4030017460	S.CER C1005 JB 1H 102K-T	T	19.8/10.5
C26	4030017460	S.CER C1005 JB 1H 102K-T	T	29.4/5.7
C27	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/5.8
C28	4030017460	S.CER C1005 JB 1H 102K-T	T	33.9/11.5
C29	4030016930	S.CER C1005 JB 1A 104K-T	T	31.2/11.5
C30	4030018890	S.CER C1005 JB 0J 224K-T	T	32.8/6.6
C31	4030016930	S.CER C1005 JB 1A 104K-T	T	34.8/11.5
C32	4030017460	S.CER C1005 JB 1H 102K-T	T	35.7/9.9
C33	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/7.5
C34	4030018860	S.CER C1005 JB 0J 105K-T	T	38.1/7.5
C35	4030017420	S.CER C1005 CH 1H 470J-T	B	37.5/9.2
C36	4030017460	S.CER C1005 JB 1H 102K-T	B	39.3/9.2
C37	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/12.3
C38	4030017460	S.CER C1005 JB 1H 102K-T	T	17.9/12.7
C40	4030017420	S.CER C1005 CH 1H 470J-T	T	21.4/13.2
C41	4030017460	S.CER C1005 JB 1H 102K-T	B	28.0/17.6
C43	4030017490	S.CER C1608 JB 1A 105K-T	B	27.8/20.3
C44	4030017460	S.CER C1005 JB 1H 102K-T	T	32.7/16.6
C45	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/12.3
C46	4030017510	S.CER C1005 CH 1H 680J-T	B	32.8/12.4
C48	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/9.2
C49	4030017420	S.CER C1005 CH 1H 470J-T	B	31.9/9.2
C51	4030017460	S.CER C1005 JB 1H 102K-T	B	23.4/22.7
C52	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/14.4
C53	4030017460	S.CER C1005 JB 1H 102K-T	B	37.5/10.9
C54	4030016790	S.CER C1005 JB 1E 103K-T	B	39.3/10.9
C55	4030017490	S.CER C1608 JB 1A 105K-T	B	33.5/16.6
C56	4030017430	S.CER C1005 CH 1H 101J-T	B	39.9/13.1
C57	4030017460	S.CER C1005 JB 1H 102K-T	B	40.5/14.9
C58	4030017420	S.CER C1005 CH 1H 470J-T	B	44.6/11.3
C59	4030017460	S.CER C1005 JB 1H 102K-T	B	44.6/10.4
C60	4030017460	S.CER C1005 JB 1H 102K-T	B	44.6/12.2
C63	4030017650	S.CER C1005 CH 1H 270J-T	B	46.4/14.9
C64	4030016790	S.CER C1005 JB 1E 103K-T	B	49.6/12.1
C65	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/14.0
C71	4030017620	S.CER C1005 CH 1H 100C-T	B	51.8/16.6
C72	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/17.8
C73	4030017460	S.CER C1005 JB 1H 102K-T	T	53.0/19.4
C74	4030017590	S.CER C1005 CH 1H 070C-T	T	58.0/18.9
C75	4030017460	S.CER C1005 JB 1H 102K-T	T	54.1/20.4
C76	4030017460	S.CER C1005 JB 1H 102K-T	B	58.6/18.6
C77	4030017460	S.CER C1005 JB 1H 102K-T	T	64.3/17.7
C78	4030017460	S.CER C1005 JB 1H 102K-T	T	58.9/18.9
C79	4030016930	S.CER C1005 JB 1A 104K-T	B	64.3/21.2
C80	4030017460	S.CER C1005 JB 1H 102K-T	B	64.3/23.4
C81	4030017360	S.CER C1005 CH 1H 030B-T	T	58.5/17.3
C83	4030017540	S.CER C1005 CH 1H R75B-T	T	58.9/21.2
C85	4030017460	S.CER C1005 JB 1H 102K-T	T	57.1/21.2
C86	4030017660	S.CER C1005 CH 1H 330J-T	T	57.0/25.9
C87	4030017660	S.CER C1005 CH 1H 330J-T	T	58.0/21.2
C88	4030017660	S.CER C1005 CH 1H 330J-T	T	56.1/25.9
C89	4030017660	S.CER C1005 CH 1H 330J-T	T	57.9/27.5
C90	4030017460	S.CER C1005 JB 1H 102K-T	B	61.7/28.8
C93	4030017420	S.CER C1005 CH 1H 470J-T	T	53.2/28.5
C94	4030017610	S.CER C1005 CH 1H 090C-T	T	53.2/27.5
C101	4030017530	S.CER C1005 CH 1H 0R5B-T	T	59.8/21.2
C102	4030016930	S.CER C1005 JB 1A 104K-T	T	56.2/21.8
C103	4030017460	S.CER C1005 JB 1H 102K-T	T	61.8/21.8
C104	4030017390	S.CER C1005 CH 1H 180J-T	T	59.8/25.9
C105	4030017660	S.CER C1005 CH 1H 330J-T	T	60.7/21.2
C106	4030017510	S.CER C1005 CH 1H 680J-T	T	61.6/25.9
C107	4030017660	S.CER C1005 CH 1H 330J-T	T	61.1/27.1
C108	4030017460	S.CER C1005 JB 1H 102K-T	B	60.8/25.6
C109	4550008090	S.TAN TCTU0J105K8R	B	65.6/28.8
C111	4030017340	S.CER C1005 CH 1H 010B-T	T	61.1/29.2
C112	4030017440	S.CER C1005 CH 1H 221J-T	T	62.7/25.3
C113	4030017360	S.CER C1005 CH 1H 030B-T	T	64.7/23.5
C114	4030017360	S.CER C1005 CH 1H 030B-T	T	63.8/23.1
C115	4030017610	S.CER C1005 CH 1H 090C-T	T	64.7/25.3
C116	4030018860	S.CER C1005 JB 0J 105K-T	B	63.1/30.0
C117	4030018820	S.CER C1005 JB 1H 561K-T	B	61.5/30.9
C118	4030017420	S.CER C1005 CH 1H 470J-T	B	66.3/30.0
C119	4030016930	S.CER C1005 JB 1A 104K-T	B	64.1/24.9
C120	4030017460	S.CER C1005 JB 1H 102K-T	B	64.7/31.8
C121	4030019560	S.CER GRM21BB31C106KE15L	B	61.1/19.7
C122	4030016790	S.CER C1005 JB 1E 103K-T	B	65.0/16.4
C123	4030017460	S.CER C1005 JB 1H 102K-T	B	47.0/29.0
C124	4030017460	S.CER C1005 JB 1H 102K-T	B	53.7/29.9
C130	4030017420	S.CER C1005 CH 1H 470J-T	B	59.9/21.6
C132	4550000560	S.TAN TEESVA 1V 334M8R	T	48.3/21.4
C134	4550003250	S.TAN TEESVA 1V 474M8R	T	46.7/29.8
C141	4030017620	S.CER C1005 CH 1H 100C-T	B	51.4/19.5
C144	4030017430	S.CER C1005 CH 1H 101J-T	T	43.3/20.5
C145	4030018890	S.CER C1005 JB 0J 224K-T	T	42.4/20.5
C146	4030018890	S.CER C1005 JB 0J 224K-T	T	41.5/20.5
C147	4030017460	S.CER C1005 JB 1H 102K-T	T	46.4/21.1
C148	4030019560	S.CER GRM21BB31C106KE15L	B	44.0/26.2
C149	4030017430	S.CER C1005 CH 1H 101J-T	T	44.2/20.5
C150	4030016790	S.CER C1005 JB 1E 103K-T	T	43.9/28.1
C151	4030017430	S.CER C1005 CH 1H 101J-T	T	43.9/27.2
C152	4030017460	S.CER C1005 JB 1H 102K-T	T	43.9/29.0
C153	4030017420	S.CER C1005 CH 1H 470J-T	T	43.1/30.4
C154	4030017420	S.CER C1005 CH 1H 470J-T	T	42.2/30.4
C155	4030017420	S.CER C1005 CH 1H 470J-T	T	41.3/30.4

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C156	4030016930	S.CER C1005 JB 1A 104K-T	T	40.4/30.4
C157	4030017460	S.CER C1005 JB 1H 102K-T	T	41.0/18.8
C158	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/18.8
C159	4030016930	S.CER C1005 JB 1A 104K-T	T	40.1/10.9
C160	4030017460	S.CER C1005 JB 1H 102K-T	T	41.9/10.9
C167	4030017630	S.CER C1005 CH 1H 120J-T	B	49.2/22.2
C168	4030017630	S.CER C1005 CH 1H 120J-T	B	48.3/22.2
C169	4030017620	S.CER C1005 CH 1H 100C-T	B	48.8/21.0
C171	4030018120	S.CER C1005 CH 1H 110J-T	B	16.2/18.5
C172	4030017640	S.CER C1005 CH 1H 150J-T	B	13.9/22.1
C173	4030017460	S.CER C1005 JB 1H 102K-T	B	13.4/24.4
C174	4030017580	S.CER C1005 CH 1H 060C-T	B	12.4/24.4
C175	4030017580	S.CER C1005 CH 1H 060C-T	B	12.9/26.5
C176	4030017430	S.CER C1005 CH 1H 101J-T	B	16.2/26.6
C178	4030017550	S.CER C1005 CH 1H 1R5B-T	B	18.0/29.2
C179	4030017370	S.CER C1005 CH 1H 3R5B-T	B	19.6/27.8
C180	4030017430	S.CER C1005 CH 1H 101J-T	B	19.2/26.0
C181	4030017370	S.CER C1005 CH 1H 3R5B-T	B	22.9/27.8
C182	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/24.6
C183	4030017460	S.CER C1005 JB 1H 102K-T	B	16.2/25.7
C184	4030016930	S.CER C1005 JB 1A 104K-T	T	20.9/26.7
C186	4030016930	S.CER C1005 JB 1A 104K-T	B	21.7/30.0
C188	4030016930	S.CER C1005 JB 1A 104K-T	B	25.3/30.0
C189	4030017460	S.CER C1005 JB 1H 102K-T	B	27.1/23.9
C191	4030016790	S.CER C1005 JB 1E 103K-T	B	28.7/28.7
C192	4030017460	S.CER C1005 JB 1H 102K-T	B	26.2/25.6
C193	4030017460	S.CER C1005 JB 1H 102K-T	B	25.3/25.6
C195	4030017570	S.CER C1005 CH 1H 040B-T	B	28.2/27.5
C196	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/25.6
C197	4030017550	S.CER C1005 CH 1H 1R5B-T	[USA-01]	B 31.0/29.8
	4030017350	S.CER C1005 CH 1H 020B-T	[EUR-01]	
	4030017350	S.CER C1005 CH 1H 020B-T	[UK-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[EXP-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[EXP-02]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[AUS-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[RUS-01]	
	4030017550	S.CER C1005 CH 1H 1R5B-T	[CHN-01]	
C198	4030017460	S.CER C1005 JB 1H 102K-T	B	32.3/25.8
C199	4030017380	S.CER C1005 CH 1H 050B-T	B	34.4/26.6
C200	4030017580	S.CER C1005 CH 1H 060C-T	B	34.7/27.9
C201	4030017460	S.CER C1005 JB 1H 102K-T	T	31.8/23.6
C202	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/23.9
C203	4030016930	S.CER C1005 JB 1A 104K-T	B	30.1/23.9
C206	4030017620	S.CER C1005 CH 1H 100C-T	B	47.4/16.6
C210	4030017630	S.CER C1005 CH 1H 120J-T	B	35.4/23.9
C211	4030017460	S.CER C1005 JB 1H 102K-T	B	34.4/22.3
C214	4030017460	S.CER C1005 JB 1H 102K-T	B	37.4/23.9
C215	4030017390	S.CER C1005 CH 1H 180J-T	B	41.9/26.3
C216	4030017460	S.CER C1005 JB 1H 102K-T	B	41.0/23.9
C217	4030016790	S.CER C1005 JB 1E 103K-T	B	40.1/23.9
C218	4030016790	S.CER C1005 JB 1E 103K-T	B	37.5/28.5
C223	4030017460	S.CER C1005 JB 1H 102K-T	B	41.9/22.3
C224	4030017460	S.CER C1005 JB 1H 102K-T	B	45.7/17.6
C225	4030017460	S.CER C1005 JB 1H 102K-T	T	39.5/38.8
C226	4030016790	S.CER C1005 JB 1E 103K-T	B	37.3/44.4
C227	4030016790	S.CER C1005 JB 1E 103K-T	B	36.3/40.8
C231	4030017430	S.CER C1005 CH 1H 101J-T	B	40.6/42.6
C232	4030017660	S.CER C1005 CH 1H 330J-T	T	42.0/38.9
C233	4030017460	S.CER C1005 JB 1H 102K-T	B	41.1/39.0
C235	4030019560	S.CER GRM21BB31C106KE15L	B	44.5/42.6
C236	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/43.1
C238	4030017460	S.CER C1005 JB 1H 102K-T	B	41.1/40.1
C239	4030017720	S.CER C1005 JB 1H 331K-T	T	43.1/40.1
C240	4030017460	S.CER C1005 JB 1H 102K-T	B	44.7/35.5
C241	4030017420	S.CER C1005 CH 1H 470J-T	B	46.5/32.8
C242	4030017710	S.CER C1005 CH 1H 181J-T	B	48.3/34.6
C243	4030017710	S.CER C1005 CH 1H 181J-T	B	46.5/35.5
C244	4030016930	S.CER C1005 JB 1A 104K-T	B	50.2/37.0
C246	4030019460	S.CER C1608 JB 0J 106M-T	T	68.8/30.7
C247	4030018140	S.CER C1005 JB 1H 391K-T	T	70.4/32.4
C248	4030016930	S.CER C1005 JB 1A 104K-T	T	68.9/37.7
C251	4030017360	S.CER C1005 CH 1H 030B-T	T	44.1/36.8
C252	4030017500	S.CER C1005 CH 1H 560J-T	T	42.5/36.8
C253	4030017580	S.CER C1005 CH 1H 060C-T	T	44.1/35.9
C254	4030017500	S.CER C1005 CH 1H 560J-T	T	42.6/34.6
C255	4030016790	S.CER C1005 JB 1E 103K-T	T	45.1/32.1
C256	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/23.7
C257	4030016790	S.CER C1005 JB 1E 103K-T	T	40.9/34.6
C261	4030016790	S.CER C1005 JB 1E 103K-T	B	50.5/38.6
C262	4030016790	S.CER C1005 JB 1E 103K-T	B	50.2/40.7
C263	4030016790	S.CER C1005 JB 1E 103K-T	B	57.1/41.5
C264	4030016790	S.CER C1005 JB 1E 103K-T	B	53.9/36.0
C265	4030016790	S.CER C1005 JB 1E 103K-T	B	58.7/36.9
C266	4030016930	S.CER C1005 JB 1A 104K-T	B	56.3/37.5
C267	4030016930	S.CER C1005 JB 1A 104K-T	B	58.1/35.7
C271	4030016930	S.CER C1005 JB 1A 104K-T	B	61.5/43.8
C272	4030016930	S.CER C1005 JB 1A 104K-T	B	62.4/41.9
C273	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/45.5
C274	4030016930	S.CER C1005 JB 1A 104K-T	B	68.9/42.0
C275	4030017040	S.CER C1005 JB 1A 333K-T	B	68.1/46.4
C276	4030017650	S.CER C1005 CH 1H 270J-T	B	67.3/42.0
C277	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/41.0
C282	4030016790	S.CER C1005 JB 1E 103K-T	B	40.8/31.1
C283	4030017590	S.CER C1005 CH 1H 070C-T	B	39.0/35.3
C284	4030016790	S.CER C1005 JB 1E 103K-T	B	36.7/38.8
C286	4030016790	S.CER C1005 JB 1E 103K-T	T	34.9/28.4
C287	4030017570	S.CER C1005 CH 1H 040B-T	T	37.1/29.6
C288	4030017600	S.CER C1005 CH 1H 080C-T	T	39.9/32.3
C290	4030016790	S.CER C1005 JB 1E 103K-T	T	37.8/40.2
C291	4030016930	S.CER C1005 JB 1A 104K-T	B	42.4/32.3
C292	4030016930	S.CER C1005 JB 1A 104K-T	T	38.3/44.1
C293	4030017460	S.CER C1005 JB 1H 102K-T	T	40.1/42.4
C311	4030018860	S.CER C1005 JB 0J 105K-T	T	24.6/31.4
C312	4030017710	S.CER C1005 CH 1H 181J-T	T	23.0/31.2
C313	4030016930	S.CER C1005 JB 1A 104K-T	T	21.2/28.8

[MAIN UNIT]


REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C318	4030016790	S.CER C1005 JB 1E 103K-T	B	73.5/21.0
C319	4030016930	S.CER C1005 JB 1A 104K-T	B	75.4/23.9
C322	4030018860	S.CER C1005 JB 0J 105K-T	B	71.5/6.2
C323	4030016930	S.CER C1005 JB 1A 104K-T	B	68.4/9.9
C324	4030017740	S.CER C1005 JB 1H 821K-T	B	68.4/6.7
C325	4030016790	S.CER C1005 JB 1E 103K-T	T	80.2/9.6
C327	4030017900	S.CER C1005 JB 1E 123K-T	B	60.9/14.3
C328	4030020010	S.CER C1005 CH 1H 271J-T	B	63.3/12.6
C334	4030017460	S.CER C1005 JB 1H 102K-T	B	15.0/46.6
C335	4030017460	S.CER C1005 JB 1H 102K-T	B	24.6/38.2
C336	4030018860	S.CER C1005 JB 0J 105K-T	B	57.3/8.6
C337	4030017460	S.CER C1005 JB 1H 102K-T	B	52.5/7.5
C338	4030017460	S.CER C1005 JB 1H 102K-T	B	50.7/7.5
C339	4030017460	S.CER C1005 JB 1H 102K-T	B	53.4/7.5
C340	4030016930	S.CER C1005 JB 1A 104K-T	B	57.3/10.2
C342	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/6.6
C343	4030019560	S.CER GRM21BB31C106KE15L	B	57.6/6.9
C344	4030016930	S.CER C1005 JB 1A 104K-T	B	55.1/2.2
C361	4030016930	S.CER C1005 JB 1A 104K-T	B	69.0/14.4
C364	4030017630	S.CER C1005 CH 1H 120J-T	B	64.5/3.9
C376	4030017460	S.CER C1005 JB 1H 102K-T	T	73.0/20.9
C377	4550007320	S.TAN F930J226MAABMA	T	72.6/17.6
C378	4030017460	S.CER C1005 JB 1H 102K-T	T	73.0/22.5
C380	4030017510	S.CER C1005 CH 1H 680J-T	T	68.0/15.0
C381	4030016930	S.CER C1005 JB 1A 104K-T	T	68.0/4.5
C382	4030016930	S.CER C1005 JB 1A 104K-T	T	66.4/4.5
C383	4030018860	S.CER C1005 JB 0J 105K-T	T	64.8/4.5
C384	4030018860	S.CER C1005 JB 0J 105K-T	T	63.2/7.0
C385	4030016930	S.CER C1005 JB 1A 104K-T	T	63.2/3.5
C386	4030016930	S.CER C1005 JB 1A 104K-T	T	64.4/12.2
C388	4030017460	S.CER C1005 JB 1H 102K-T	B	20.9/3.5
C389	4030017460	S.CER C1005 JB 1H 102K-T	B	43.9/2.5
C390	4030017460	S.CER C1005 JB 1H 102K-T	B	53.3/2.6
C391	4030017420	S.CER C1005 CH 1H 470J-T	B	37.3/46.3
C392	4030017420	S.CER C1005 CH 1H 470J-T	B	29.1/43.9
C393	4520000020	S.NIO NOJC227M006RWJV	B	19.8/40.5
C394	4030017460	S.CER C1005 JB 1H 102K-T	B	28.2/43.9
C395	4520000020	S.NIO NOJC227M006RWJV	T	21.2/37.1
C396	4030017460	S.CER C1005 JB 1H 102K-T	T	27.1/47.4
C397	4030017460	S.CER C1005 JB 1H 102K-T	T	25.2/37.4
C398	4030017460	S.CER C1005 JB 1H 102K-T	B	12.2/32.0
C399	4030016930	S.CER C1005 JB 1A 104K-T	B	22.2/37.2
C400	4550006250	S.TAN TEESVA 1A 106M8R	T	12.9/40.8
C401	4030016930	S.CER C1005 JB 1A 104K-T	B	12.2/37.6
C403	4030018890	S.CER C1005 JB 0J 224K-T	B	15.0/39.5
C404	4030016930	S.CER C1005 JB 1A 104K-T	B	12.2/38.5
C405	4030018860	S.CER C1005 JB 0J 105K-T	B	19.3/33.7
C406	4030017460	S.CER C1005 JB 1H 102K-T	T	20.7/34.7
C408	4030016930	S.CER C1005 JB 1A 104K-T	T	4.8/37.5
C412	4030017460	S.CER C1005 JB 1H 102K-T	T	6.5/42.8
C413	4030017460	S.CER C1005 JB 1H 102K-T	B	7.7/31.9
C423	4030016790	S.CER C1005 JB 1E 103K-T	B	67.2/18.4
C426	4030016790	S.CER C1005 JB 1E 103K-T	B	67.8/39.4
C427	4030016930	S.CER C1005 JB 1A 104K-T	T	73.7/15.3
C428	4030017460	S.CER C1005 JB 1H 102K-T	T	16.4/32.2
C429	4030016790	S.CER C1005 JB 1E 103K-T	B	72.2/14.8
C430	4030016930	S.CER C1005 JB 1A 104K-T	T	63.4/9.0
C431	4510009870	S.ELE 10 CE 100 LD	T	14.7/27.2
C432	4030017460	S.CER C1005 JB 1H 102K-T	T	92.7/6.4
C433	4030017460	S.CER C1005 JB 1H 102K-T	T	17.3/32.2
C434	4030016790	S.CER C1005 JB 1E 103K-T	T	14.3/32.7
C435	4550007320	S.TAN F930J226MAABMA	T	19.4/30.8
C437	4030017460	S.CER C1005 JB 1H 102K-T	T	14.3/31.8
C448	4030019490	S.CER C2012 JB 1A 106K-T	B	28.3/46.0
C451	4030016930	S.CER C1005 JB 1A 104K-T	B	86.6/21.9
C452	4030016930	S.CER C1005 JB 1A 104K-T	B	86.6/24.5
C453	4030017640	S.CER C1005 CH 1H 150J-T	T	83.9/22.5
C454	4030017580	S.CER C1005 CH 1H 060C-T	T	85.2/21.3
C455	4030017640	S.CER C1005 CH 1H 150J-T	B	83.9/21.9
C456	4030016930	S.CER C1005 JB 1A 104K-T	T	82.7/10.5
C457	4030017030	S.CER C1005 JB 1A 273K-T	T	86.0/9.3
C458	4030018900	S.CER C1005 JB 0J 474K-T	T	84.2/19.8
C461	4030019990	S.CER C1005 JB 1C 104K-T	B	96.9/12.4
C462	4030020190	S.CER GRM32EB31C476KE15L	B	96.3/9.1
C463	4030019990	S.CER C1005 JB 1C 104K-T	T	93.6/8.0
C464	4030020190	S.CER GRM32EB31C476KE15L	T	90.7/7.0
C465	4050000240	S.FEE NFM18PC104R1C3D	T	88.5/9.0
C466	4030018860	S.CER C1005 JB 0J 105K-T	T	88.6/10.7
C467	4030018860	S.CER C1005 JB 0J 105K-T	T	89.5/12.8
C468	4030020190	S.CER GRM32EB31C476KE15L	B	92.4/8.0
C482	4030017920	S.CER C1005 JB 1A 683K-T	T	72.0/4.6
	4030018390	S.CER C1005 JB 1A 563K-T	[USA-01]	
	4030018390	S.CER C1005 JB 1A 563K-T	[EUR-01]	
	4030017920	S.CER C1005 JB 1A 683K-T	[UK-01]	
	4030017920	S.CER C1005 JB 1A 683K-T	[EXP-01]	
	4030017920	S.CER C1005 JB 1A 683K-T	[EXP-02]	
	4030017920	S.CER C1005 JB 1A 683K-T	[AUS-01]	
	4030017920	S.CER C1005 JB 1A 683K-T	[RUS-01]	
	4030017920	S.CER C1005 JB 1A 683K-T	[CHN-01]	
C483	4030018860	S.CER C1005 JB 0J 105K-T	T	70.3/3.7
C484	4030018860	S.CER C1005 JB 0J 105K-T	T	72.0/5.5
C485	4030018860	S.CER C1005 JB 0J 105K-T	B	72.3/7.1
C486	4030016930	S.CER C1005 JB 1A 104K-T	T	70.7/14.5
C487	4030018860	S.CER C1005 JB 0J 105K-T	T	72.5/14.5
C488	4030018860	S.CER C1005 JB 0J 105K-T	T	73.7/14.4
C489	4030018860	S.CER C1005 JB 0J 105K-T	B	65.5/13.0
C490	4030017920	S.CER C1005 JB 1A 683K-T	T	73.7/3.7
C491	4030016790	S.CER C1005 JB 1E 103K-T	T	73.7/4.6
C492	4030017430	S.CER C1005 CH 1H 101J-T	B	70.2/8.3
C493	4030018100	S.CER C1005 JB 1H 681K-T	B	72.2/9.8
C494	4030016790	S.CER C1005 JB 1E 103K-T	B	69.3/8.3
C501	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/16.1
C502	4030016930	S.CER C1005 JB 1A 104K-T	B	75.5/17.9
C503	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/15.2
C504	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/17.0
C505	4030016930	S.CER C1005 JB 1A 104K-T	B	74.4/14.3

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION		M.	H/V LOCATION
C506	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.6/19.3
C507	4030018860	S.CER	C1005 JB 0J 105K-T	T	83.3/8.9
C508	4030017460	S.CER	C1005 JB 1H 102K-T	T	84.2/8.9
C509	4030018860	S.CER	C1005 JB 0J 105K-T	T	90.2/18.6
C510	4030017460	S.CER	C1005 JB 1H 102K-T	T	88.6/11.6
C511	4030018860	S.CER	C1005 JB 0J 105K-T	T	91.4/21.7
C512	4030018860	S.CER	C1005 JB 0J 105K-T	B	75.7/12.9
C513	4030016930	S.CER	C1005 JB 1A 104K-T	T	86.4/19.7
C514	4030018860	S.CER	C1005 JB 0J 105K-T	T	76.7/18.6
C515	4030017460	S.CER	C1005 JB 1H 102K-T	T	91.4/22.6
C900	4030016930	S.CER	C1005 JB 1A 104K-T	T	75.5/35.6
C901	4030018910	S.CER	C1608 JB 0J 475K-T	T	76.0/36.7
C903	4050000240	S.FEE	NFM18PC104R1C3D	B	72.3/39.3
C904	4050000240	S.FEE	NFM18PC104R1C3D	B	73.1/41.2
C905	4050000240	S.FEE	NFM18PC104R1C3D	B	72.3/36.9
C907	4030017460	S.CER	C1005 JB 1H 102K-T	T	75.2/32.3
C908	4030018910	S.CER	C1608 JB 0J 475K-T	T	77.5/34.4
C909	4030016930	S.CER	C1005 JB 1A 104K-T	T	78.1/35.5
C910	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.9/40.9
C911	4550007730	S.TAN	TEESVJ 0J 106M8R	B	74.8/41.1
C912	4030018910	S.CER	C1608 JB 0J 475K-T	T	78.8/39.4
C913	4030016930	S.CER	C1005 JB 1A 104K-T	T	80.0/40.0
C915	4030016930	S.CER	C1005 JB 1A 104K-T	B	70.6/35.9
C916	4550007730	S.TAN	TEESVJ 0J 106M8R	B	71.8/33.7
C917	4030016930	S.CER	C1005 JB 1A 104K-T	B	70.6/35.0
C918	4030016790	S.CER	C1005 JB 1E 103K-T	B	71.2/41.4
C919	4030018860	S.CER	C1005 JB 0J 105K-T	T	81.1/44.5
C920	4030016790	S.CER	C1005 JB 1E 103K-T	T	81.1/43.6
C921	4030018910	S.CER	C1608 JB 0J 475K-T	B	80.3/39.6
C922	4030018910	S.CER	C1608 JB 0J 475K-T	B	78.4/40.2
C923	4030016790	S.CER	C1005 JB 1E 103K-T	B	90.0/30.9
C924	4030016790	S.CER	C1005 JB 1E 103K-T	B	73.6/30.9
C925	4030017420	S.CER	C1005 CH 1H 470J-T	B	85.2/28.6
C926	4030017460	S.CER	C1005 JB 1H 102K-T	B	83.7/29.8
C927	4030019460	S.CER	C1608 JB 0J 106M-T	B	73.7/32.6
C928	4030018860	S.CER	C1005 JB 0J 105K-T	B	74.9/29.8
C930	4030018860	S.CER	C1005 JB 0J 105K-T	B	83.3/31.9
C931	4030018860	S.CER	C1005 JB 0J 105K-T	B	86.7/41.3
C932	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.4/31.7
C933	4030016930	S.CER	C1005 JB 1A 104K-T	B	71.8/35.4
C934	4030018910	S.CER	C1608 JB 0J 475K-T	B	70.7/32.2
C935	4030016790	S.CER	C1005 JB 1E 103K-T	B	90.2/38.4
C936	4030018860	S.CER	C1005 JB 0J 105K-T	B	89.8/37.5
C937	4030016790	S.CER	C1005 JB 1E 103K-T	B	88.0/30.4
C938	4030017420	S.CER	C1005 CH 1H 470J-T	B	81.6/29.9
C939	4030017420	S.CER	C1005 CH 1H 470J-T	B	80.0/31.1
C940	4030018910	S.CER	C1608 JB 0J 475K-T	B	83.2/43.3
C941	4030016930	S.CER	C1005 JB 1A 104K-T	T	83.3/43.6
C942	4030016930	S.CER	C1005 JB 1A 104K-T	B	92.3/41.2
C943	4030016790	S.CER	C1005 JB 1E 103K-T	B	87.7/41.3
C944	4030016930	S.CER	C1005 JB 1A 104K-T	B	76.8/43.4
C945	4030016930	S.CER	C1005 JB 1A 104K-T	B	72.3/44.5
C946	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.5/48.4
C947	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.5/27.0
C948	4030016930	S.CER	C1005 JB 1A 104K-T	B	74.1/43.9
C949	4030017420	S.CER	C1005 CH 1H 470J-T	B	72.3/43.6
C950	4030017620	S.CER	C1005 CH 1H 100C-T	B	77.8/48.6
C951	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.0/46.9
C952	4030017400	S.CER	C1005 CH 1H 220J-T	B	83.1/27.1
C953	4030017460	S.CER	C1005 JB 1H 102K-T	B	80.5/48.6
C954	4030016790	S.CER	C1005 JB 1E 103K-T	B	82.3/48.6
C955	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.3/43.8
C956	4030017380	S.CER	C1005 CH 1H 050B-T	B	79.9/42.9
C957	4030016930	S.CER	C1005 JB 1A 104K-T	B	78.6/42.5
C958	4030016930	S.CER	C1005 JB 1A 104K-T	T	68.9/38.6
C959	4030017620	S.CER	C1005 CH 1H 100C-T	B	78.3/41.3
J51	6450000131	CON	HSJ1102-018540		
J52	6450002250	CON	HSJ1456-010320		
J53	6510021901	S.CON	BM02B-ASRS-TF(LF)(SN)	T	27.2/34.5
F51	5210001160	S.FUS	ERBRE3R00V	T	10.7/37.6
DS51	5040003520	S.LED	LNJ115W8PRA	T	2.0/37.9
MC51	7700002950	MIC	EM9745P-33-G <HOR>		
S51	2260001900	SWI	SW-149 (SKHLLD)		
S52	2260002800	S.SWI	SW-167 (SKQTLAE010)	B	39.2/1.9
S53	2260002800	S.SWI	SW-167 (SKQTLAE010)	B	48.7/1.9
S54	2250000680	ENC	FSR080453W-01+16C L15.9 <SLVJ>		
EP2	6910018460	S.BEA	MMZ1005Y102C-T	B	32.8/15.5
EP3	6910018460	S.BEA	MMZ1005Y102C-T	B	63.4/21.2
EP4	6910018460	S.BEA	MMZ1005Y102C-T	T	45.1/28.7
EP5	6910018460	S.BEA	MMZ1005Y102C-T	T	41.0/10.9
EP6	6910014730	S.BEA	MPZ22012S331A-T	B	25.2/21.4
EP7	6910021240	S.BEA	MMZ1005A152ET	B	61.7/25.6
EP8	6910021240	S.BEA	MMZ1005A152ET	B	62.6/28.8
EP51	6910018460	S.BEA	MMZ1005Y102C-T	B	19.1/46.2
EP52	6910021240	S.BEA	MMZ1005A152ET	B	95.9/13.0
EP53	6910021240	S.BEA	MMZ1005A152ET	B	95.9/15.6
EP900	6910016330	S.BEA	MMZ1005S 601CT-S	B	71.2/42.3
EP902	6910016330	S.BEA	MMZ1005S 601CT-S	B	70.1/33.7
EP903	6910016330	S.BEA	MMZ1005S 601CT-S	T	83.2/49.7
EP904	6910016330	S.BEA	MMZ1005S 601CT-S	T	94.4/47.0
EP905	6910016330	S.BEA	MMZ1005S 601CT-S	B	84.5/49.8
EP906	6910016330	S.BEA	MMZ1005S 601CT-S	B	93.2/46.9


BOARD LAYOUTS

The combination of top side and bottom side of this page shows the actual configuration of P.C. board.

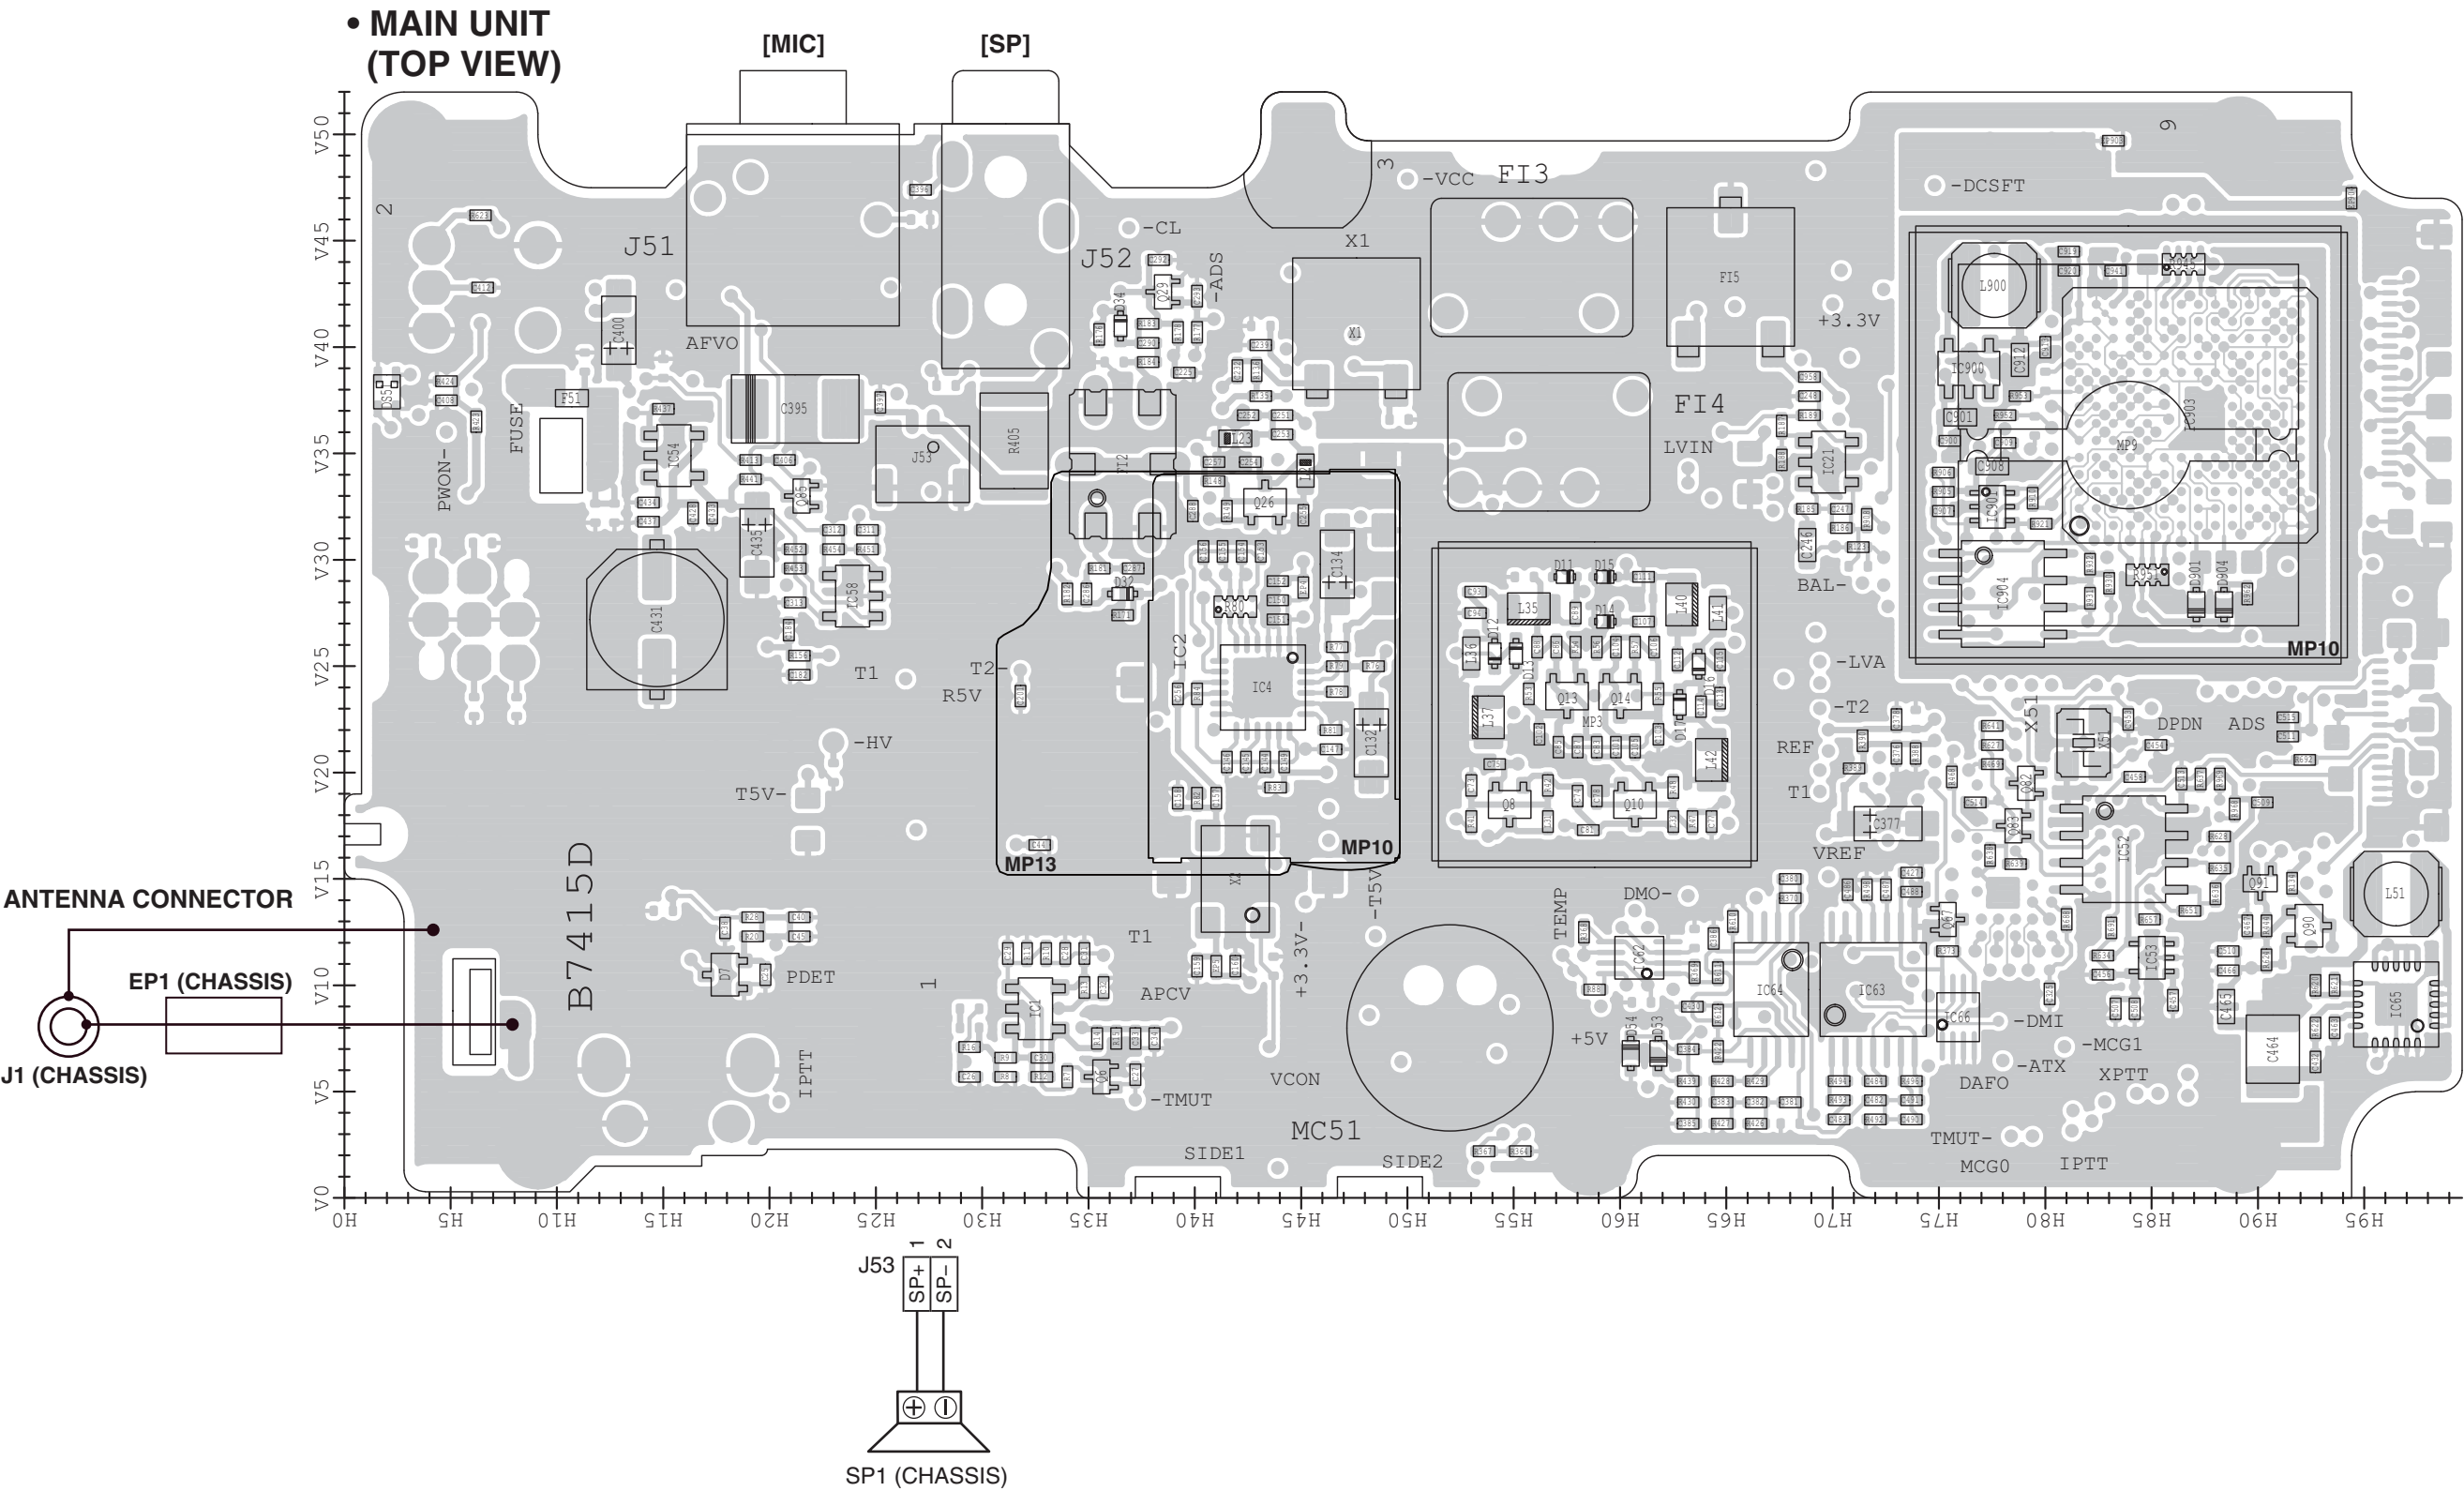


[illegible]

- MAIN UNIT (1/3)




• MAIN UNIT (2/3)

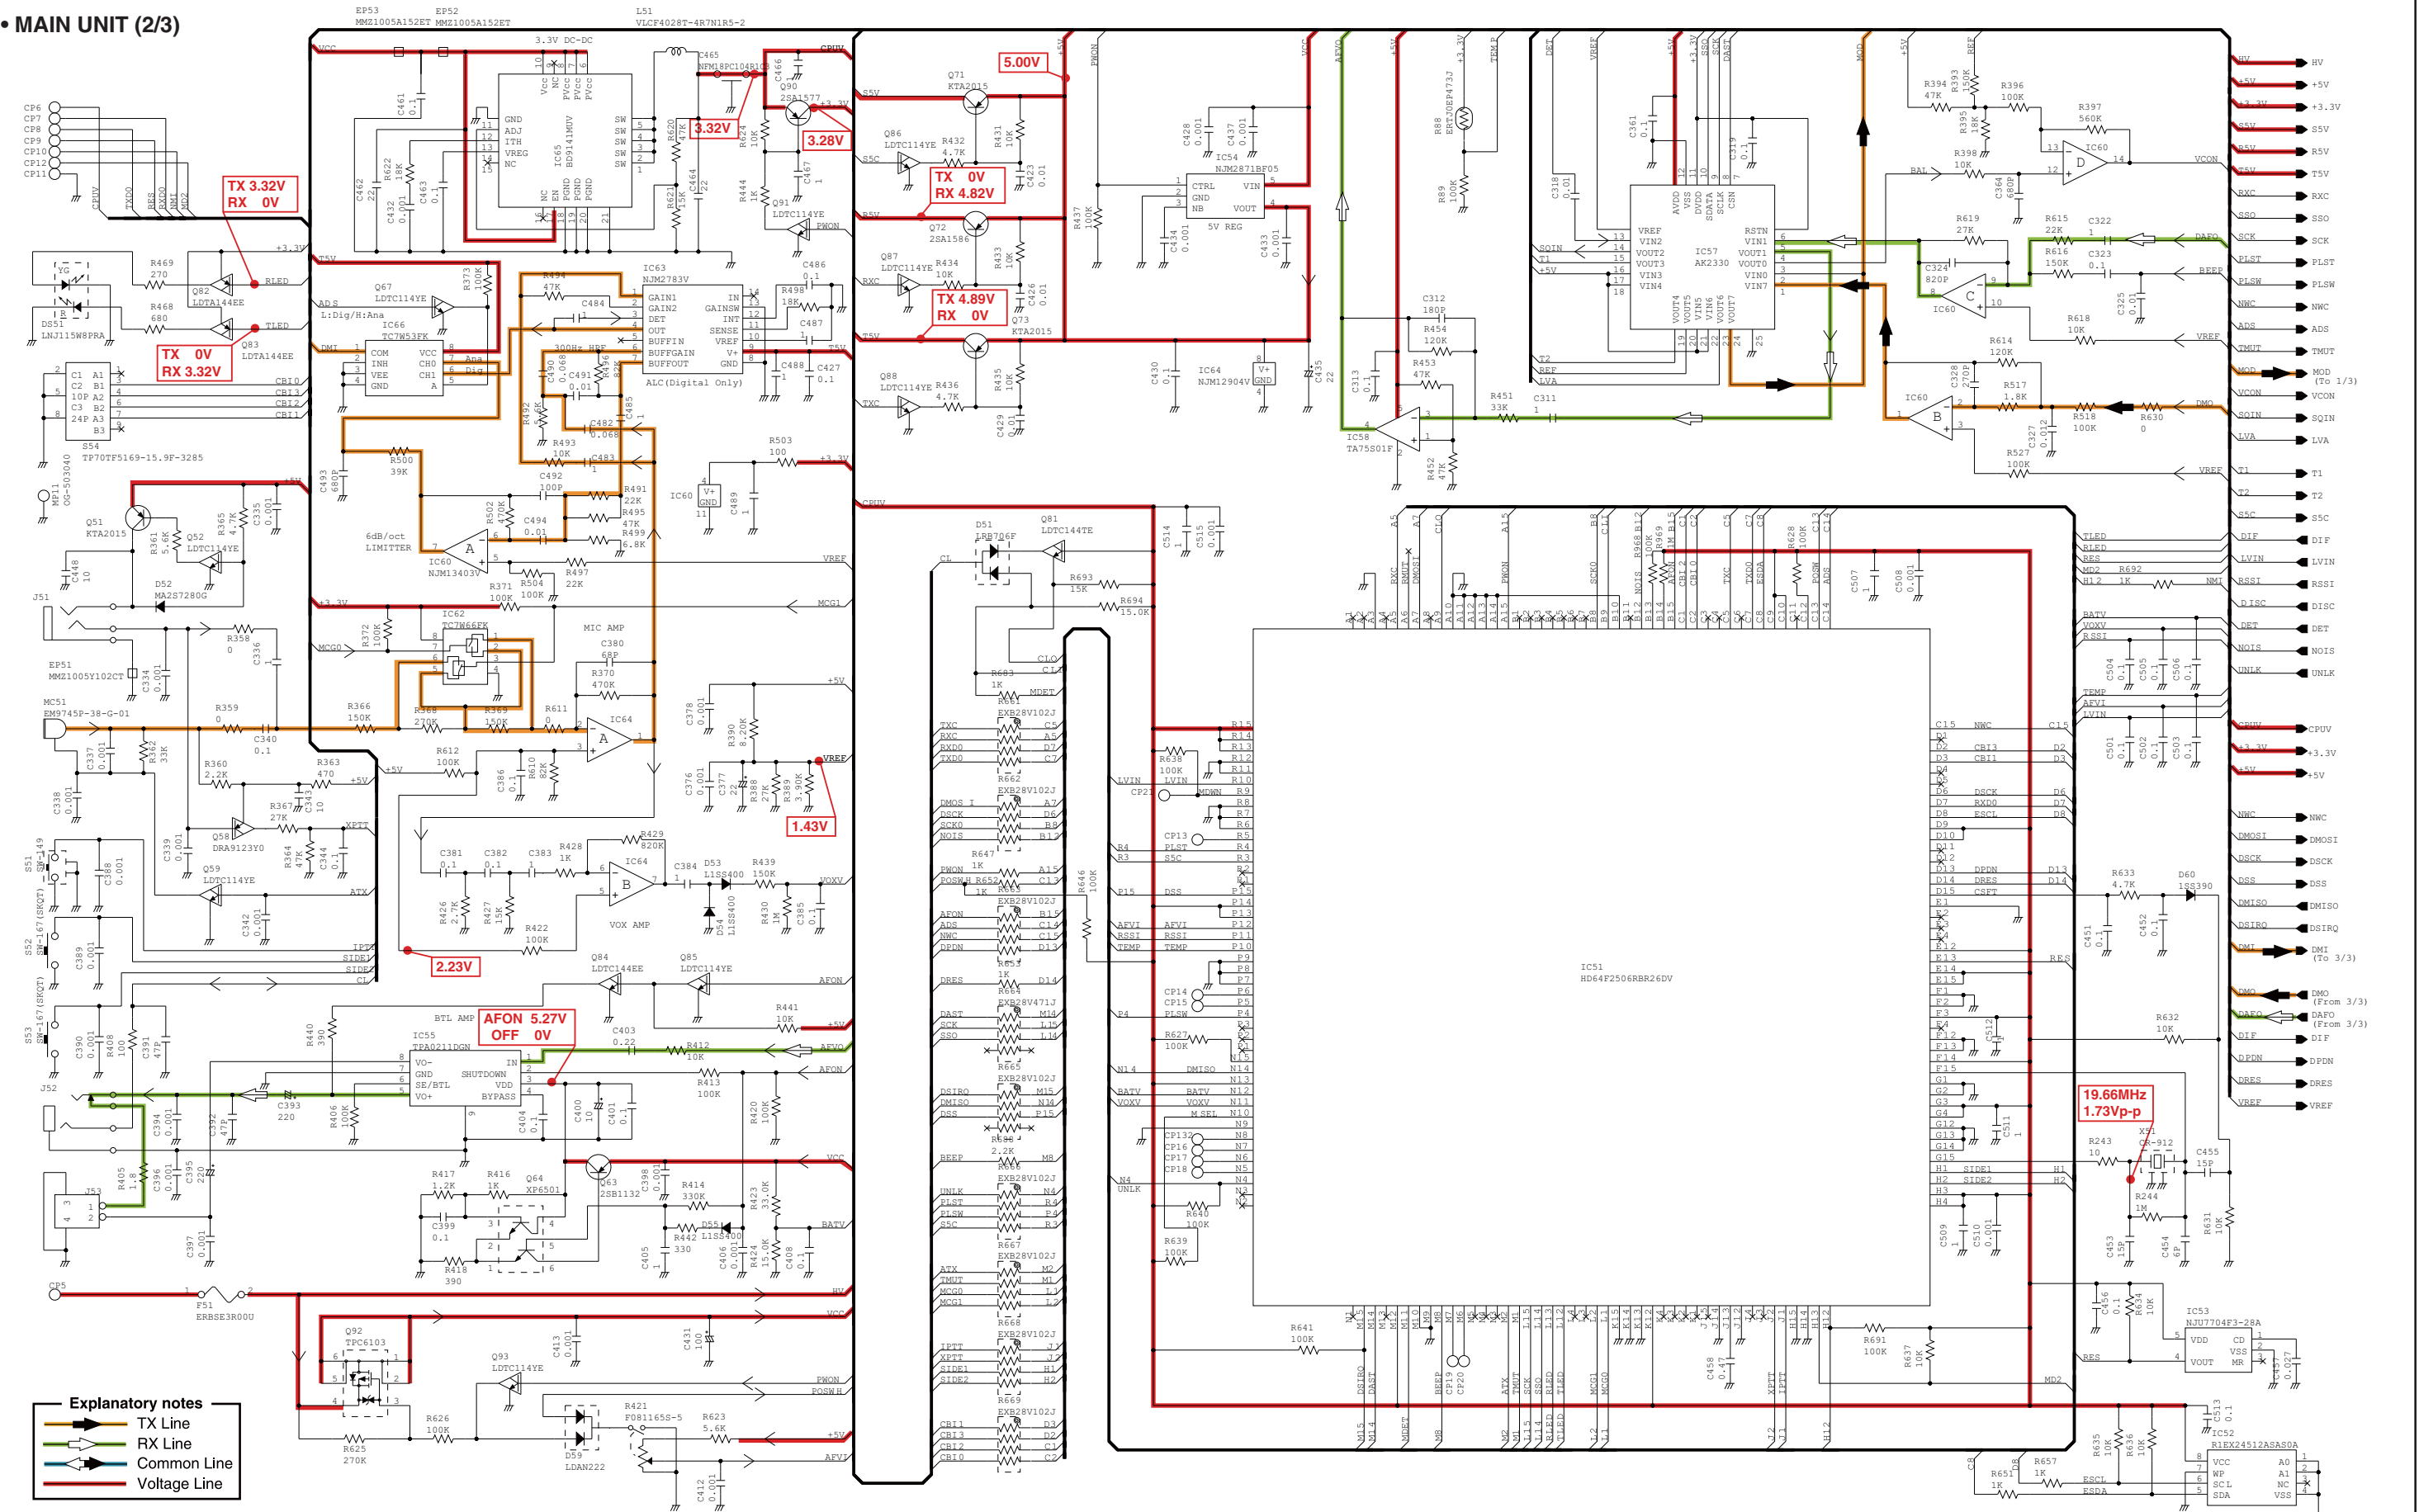

*: Refer to the PARTS LIST for the value and name of component.

• MAIN UNIT (3/3)

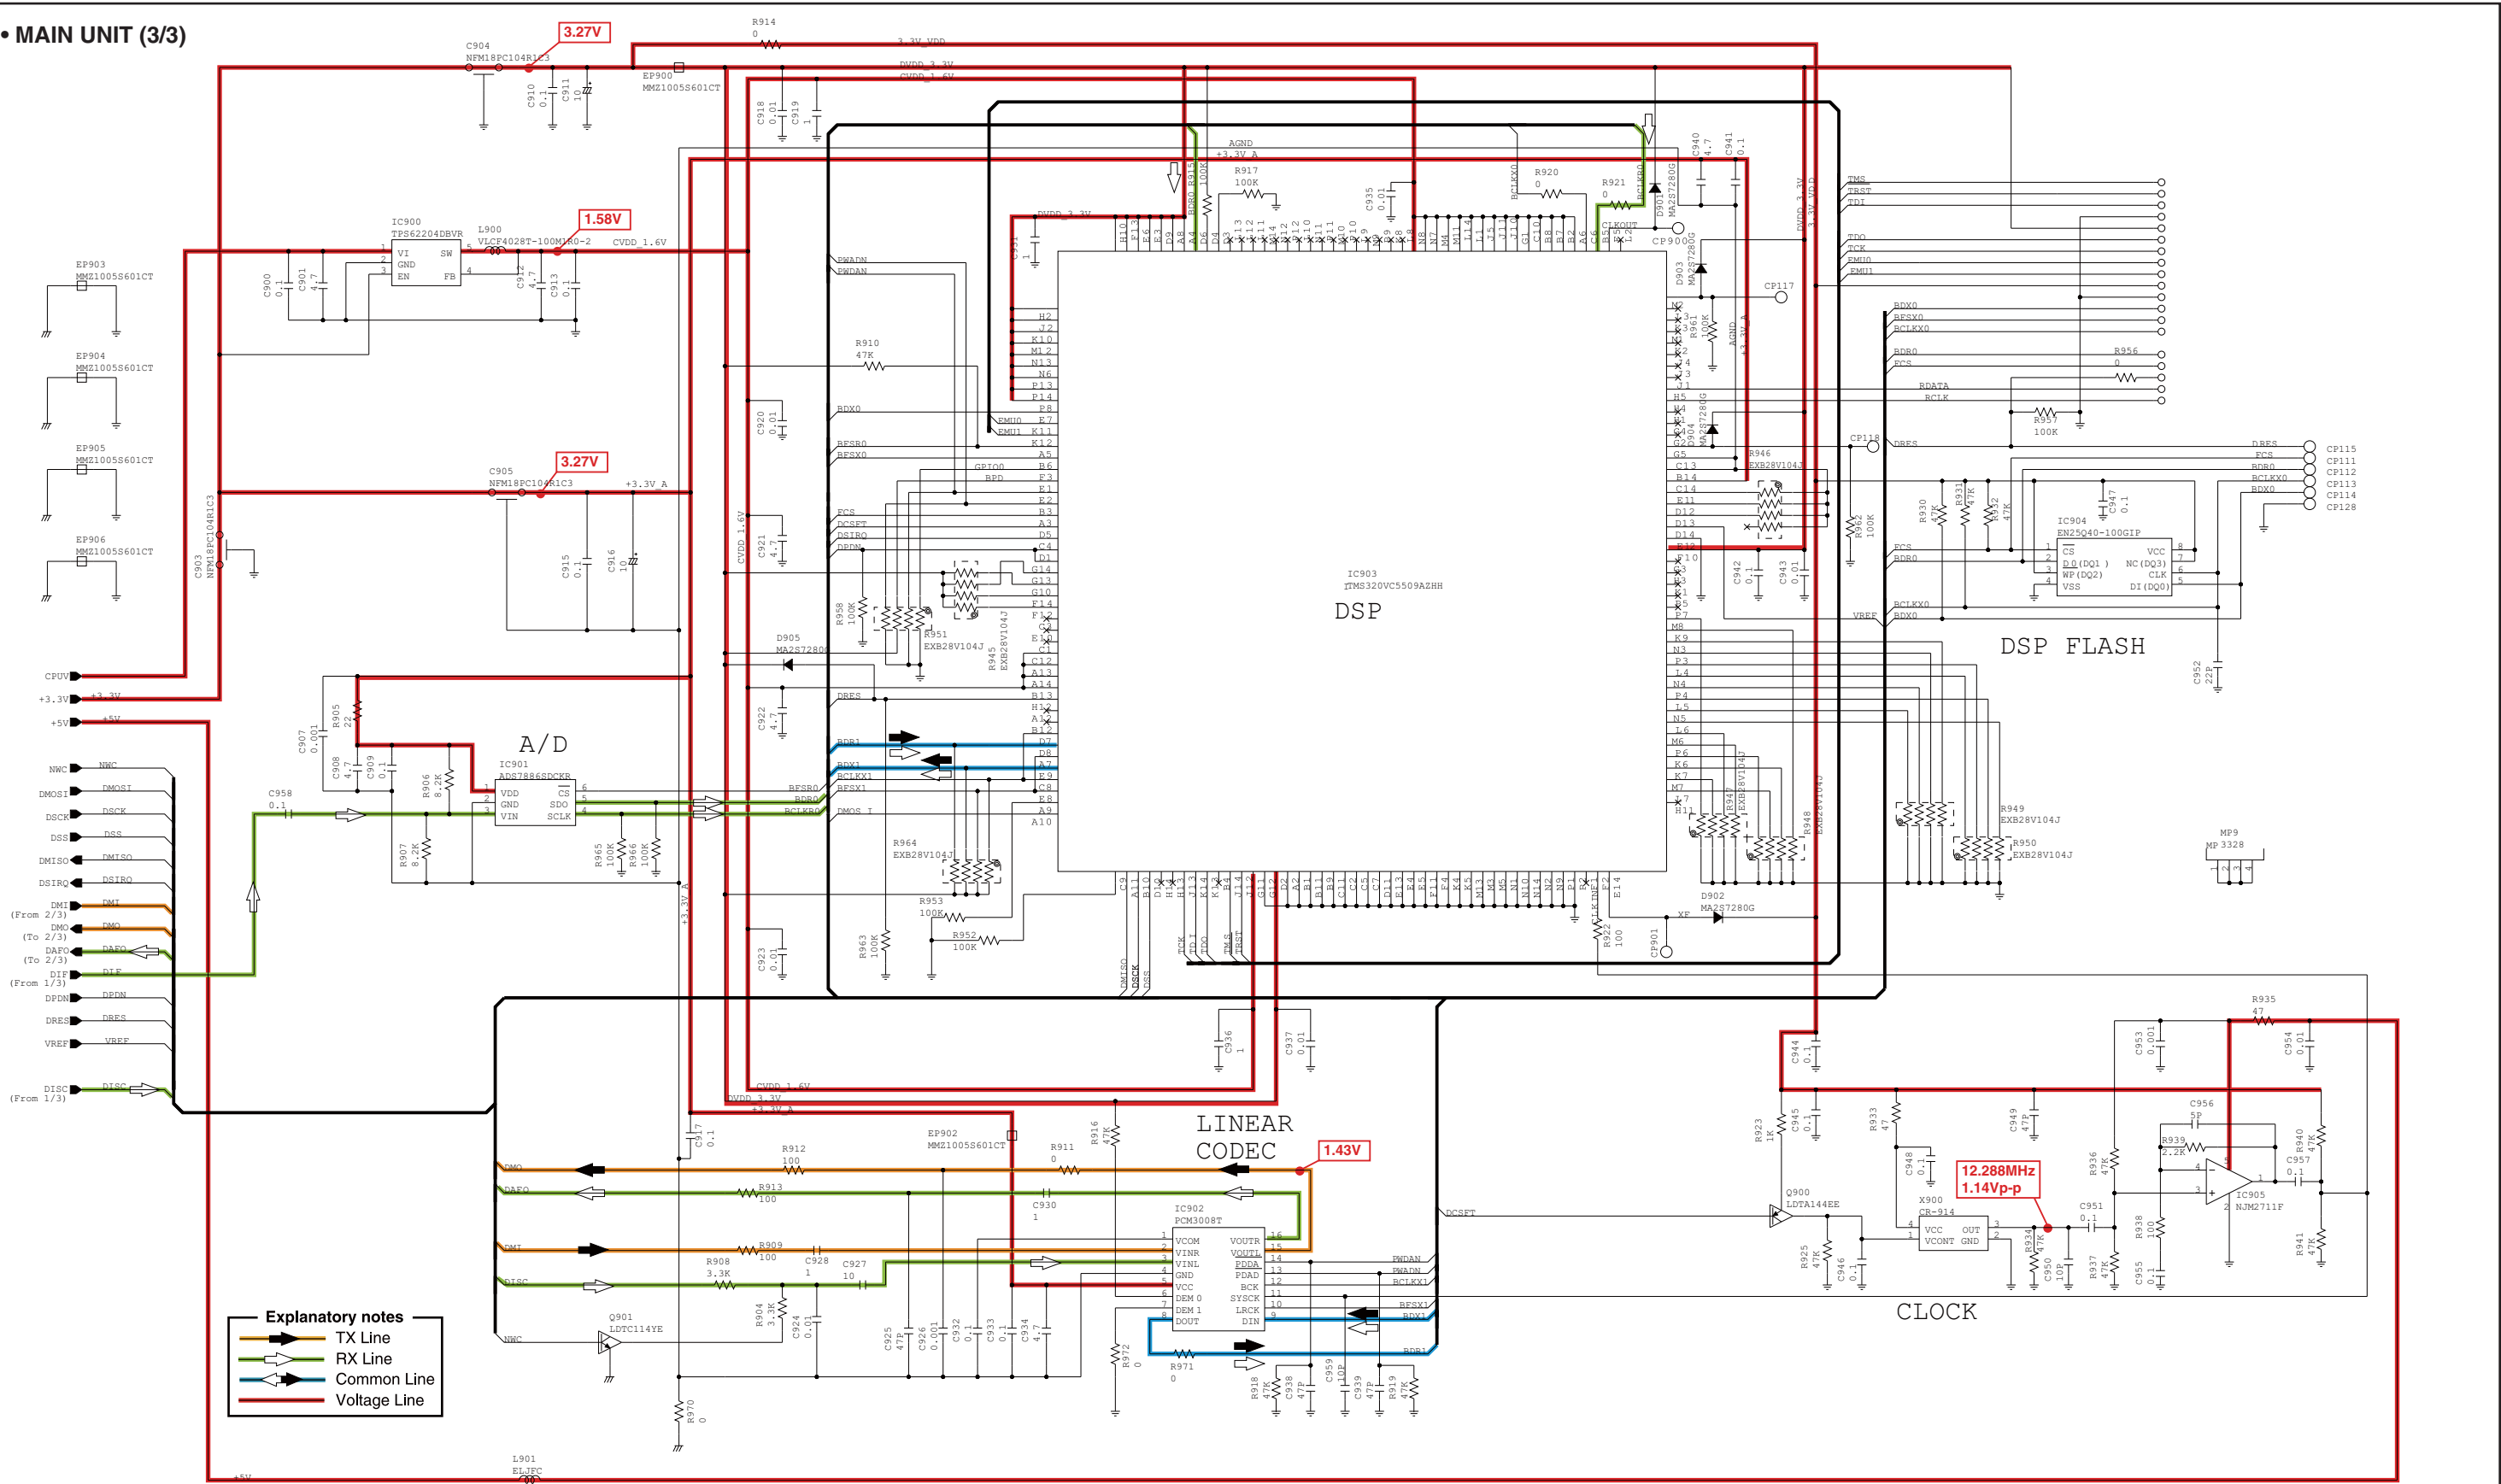

*: Refer to the PARTS LIST for the value and name of component.



SERVICE MANUAL

VHF TRANSCEIVERS

IC-F3101D
IC-F3103D
IC-F3106D

S-14711XZ-C1
Feb. 2011

INTRODUCTION

This service manual describes the latest technical information for the **IC-F3101D**, **IC-F3103D** and **IC-F3106D** VHF TRANSCEIVERS, at the time of publication.

MODEL	VERSION
IC-F3101D	USA-01
IC-F3103D	EXP-01
	EXP-02
	AUS-01
IC-F3106D	RUS-01

To upgrade quality, any electrical or mechanical parts and internal circuits are subject to change without notice or obligation.

CAUTION

NEVER connect the transceiver to an AC outlet or to a DC power supply that uses more than the specified voltage. This will ruin the transceiver.

DO NOT expose the transceiver to rain, snow or any liquids.

DO NOT reverse the polarities of the power supply when connecting the transceiver.

DO NOT apply an RF signal of more than 20 dBm (100 mW) to the antenna connector. This could damage the transceiver's front-end.

ORDERING PARTS

Be sure to include the following four points when ordering replacement parts:

1. 10-digit Icom part number
2. Component name
3. Equipment model name and unit name
4. Quantity required

<ORDER EXAMPLE>

1110007320	S.IC	NJM2591V	IC-F3101D	MAIN UNIT	5 pieces
8820001210	Screw	2438 screw	IC-F3103D	Top cover	10 pieces

Addresses are provided on the inside back cover for your convenience.

REPAIR NOTES

1. Make sure that the problem is internal before disassembling the transceiver.
2. **DO NOT** open the transceiver until the transceiver is disconnected from its power source.
3. **DO NOT** force any of the variable components. Turn them slowly and smoothly.
4. **DO NOT** short any circuits or electronic parts. An insulated tuning tool **MUST** be used for all adjustments.
5. **DO NOT** keep power ON for a long time when the transceiver is defective.
6. **DO NOT** transmit power into a Standard Signal Generator or a Sweep Generator.
7. **ALWAYS** connect a 30 dB to 40 dB attenuator between the transceiver and a Deviation Meter or Spectrum Analyzer, when using such test equipment.
8. **READ** the instructions of the test equipment thoroughly before connecting it to the transceiver.



TABLE OF CONTENTS

SECTION 1 SPECIFICATIONS

SECTION 2 INSIDE VIEWS

SECTION 3 DISASSEMBLY INSTRUCTION

SECTION 4 CIRCUIT DESCRIPITON

4-1	RECEIVER CIRCUITS.....	4-1
4-2	TRANSMITTER CIRCUITS.....	4-2
4-3	FREQUENCY SYNTHESIZER CIRCUITS	4-3
4-4	VOLTAGE DIAGRAMS.....	4-3
4-5	PORT ALLOCATIONS.....	4-4

SECTION 5 ADJUSTMENT PROCEDURES

5-1	PREPARATION	5-1
5-2	FREQUENCY ADJUSTMENT.....	5-4
5-3	TRANSMIT ADJUSTMENT	5-5
5-4	RECEIVE ADJUSTMENT	5-6

SECTION 6 PARTS LIST

SECTION 7 MECHANICAL PARTS

SECTION 8 BOARD LAYOUTS

SECTION 9 BLOCK DIAGRAM

SECTION 10 VOLTAGE DIAGRAM

SECTION 1

SPECIFICATIONS

■ GENERAL

- Frequency range : 136–174 MHz
- Number of conventional channels : 16
- Type of emission : Wide 16K0F3E (30.0 kHz/25.0 KHz)
Narrow 11K0F3E 11K0F7E, D (15.0 kHz)
8K50F3E 8K10F1E, D (12.5 kHz)
Digital 4K00F1E, D (6.25 kHz)
- Antenna impedance : 50 Ω (nominal)
- Operating temperature range : -30°C to $+60^{\circ}\text{C}$ (-22°F to $+140^{\circ}\text{F}$)
- Power supply voltage : Specified Icom's battery packs only (7.5 V DC; negative ground)
- Current drain (approximately) : Receiving 90 mA (stand-by)
400 mA (max. audio, with internal speaker)
Transmitting 1.3 A (at 5 W)
- Dimensions (projections not included) : 58.0 (W) \times 111.5 (H) \times 36.5 (D) mm; 2.2 (W) \times 4.4 (H) \times 1.4 (D) in. (with BP-265)
- Weight (approximately) : 150 g; 5.3 oz.
320 g; 12.6 oz. (including MB-124, BP-265 and FA-SC55V)

■ TRANSMITTER

- Output power : 5 W
- Modulation : Variable reactance frequency modulation
- Maximum frequency deviation : Narrow ± 2.5 kHz
Wide ± 5.0 kHz
- Frequency stability : ± 2.5 ppm
- Spurious emissions : 70 dB min.
- Adjacent channel power : Narrow 60 dB min. 71 dB typ.
Wide 70 dB min. 75 dB typ.
- Audio harmonic distortion (at 40% deviation) : Narrow 0.8% typ.
Wide 0.5% typ.
- FM hum and Noise (without CCITT Filter) : Narrow 34 dB min. 46 dB typ.
Wide 40 dB min. 52 dB typ.
- Limiting charact of modulator : 60–100% of max. deviation
- Input impedance (MIC) : 2.2 k Ω


■ RECEIVER

- Sensitivity : 0.23 μV typ. at 12 dB SINAD
- Squelch sensitivity (at threshold) : 0.22 μV typ.
- Intermediate frequency : 1st IF; 46.35 MHz, 2nd IF; 450 kHz
- Adjacent channel selectivity : Narrow 60 dB min. , 71 dB typ.
Wide 70 dB min. , 77 dB typ.
- Spurious response : 70 dB min., 91 dB typ.
- Intermodulation : 70 dB min., 75 dB typ.
- FM hum and Noise (without CCITT Filter) : Narrow 34 dB min. 42 dB typ.
Wide 40 dB min. 48 dB typ.
- Audio output power : 0.8 W typ. at 5% distortion with 12 Ω load (internal speaker)
0.4 W typ. at 5% distortion With 8 Ω (external speaker)
- Audio output impedance : 8 Ω

Measurements made in accordance with TIA-603.

All stated specifications are subject to change without notice or obligation.


• MAIN UNIT (TOP VIEW)

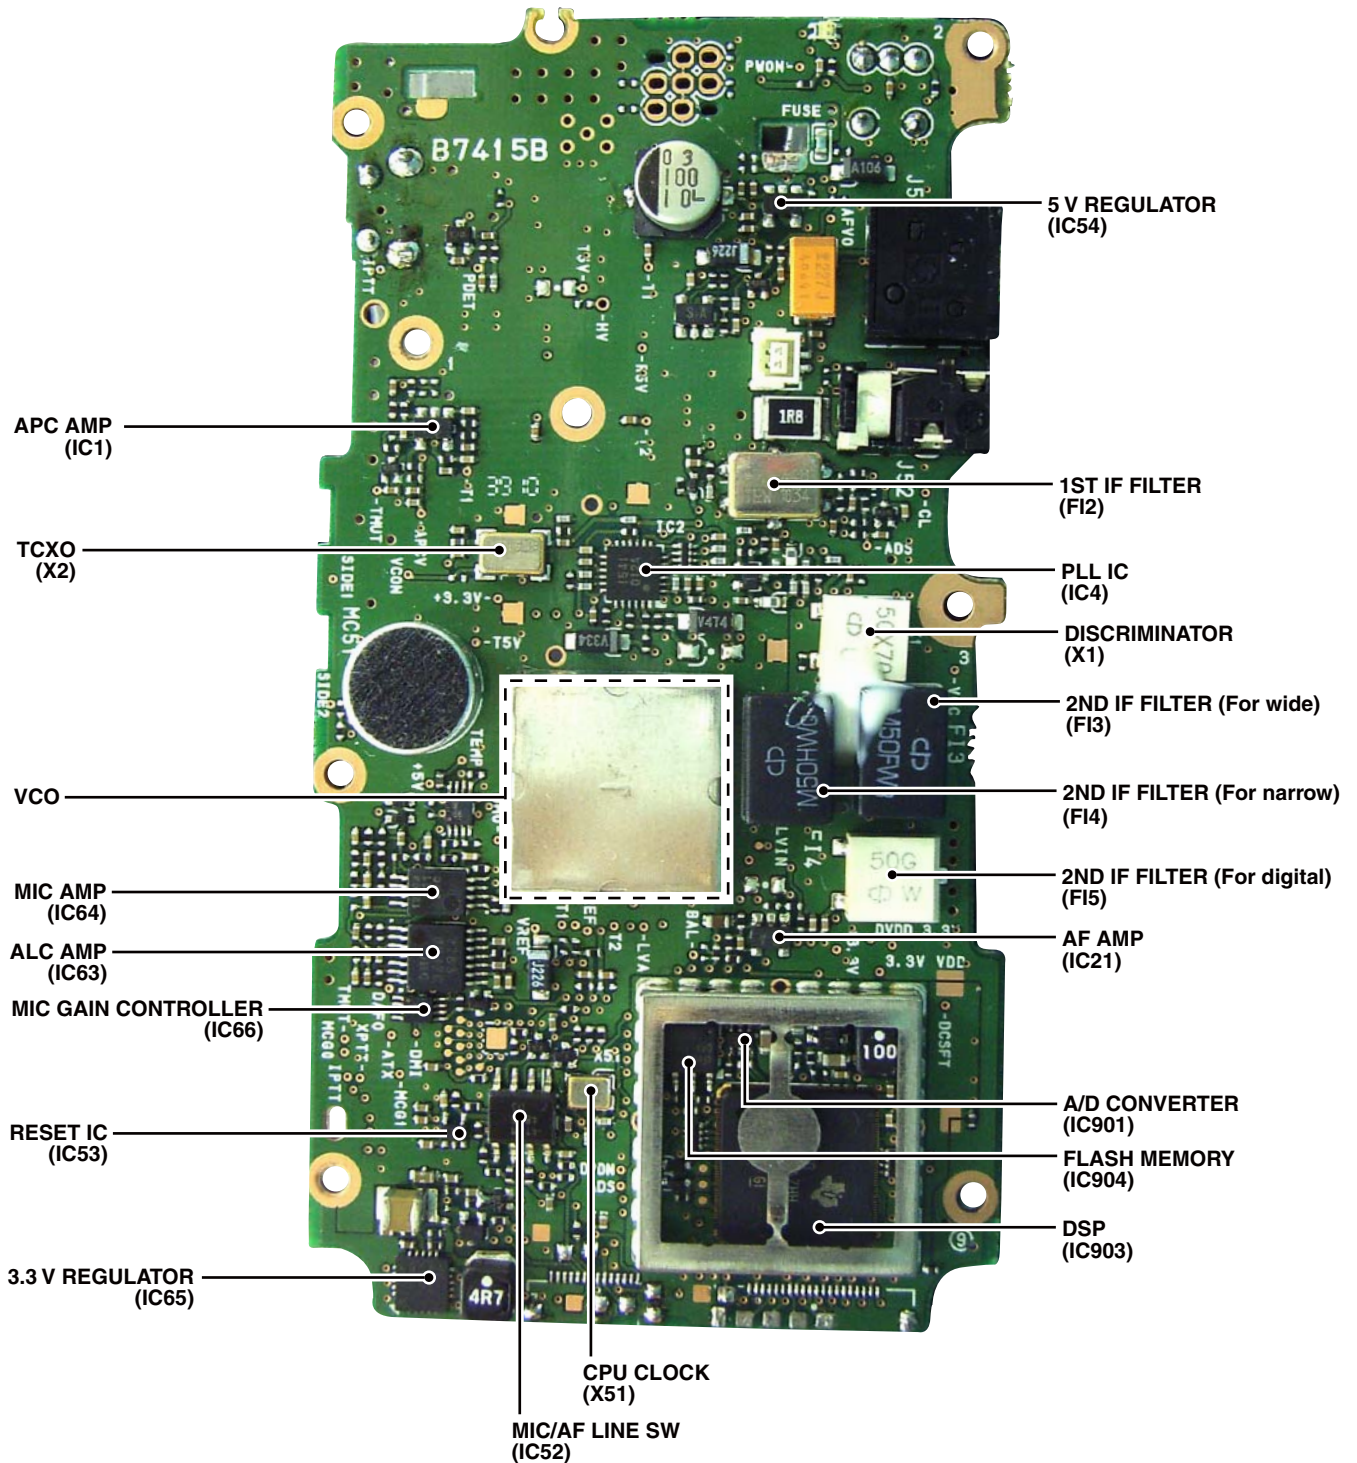

SECTION 3 DISASSEMBLY INSTRUCTION

1. REMOVING THE CHASSIS


1) Remove the ANT connector nut and 2 knobs.

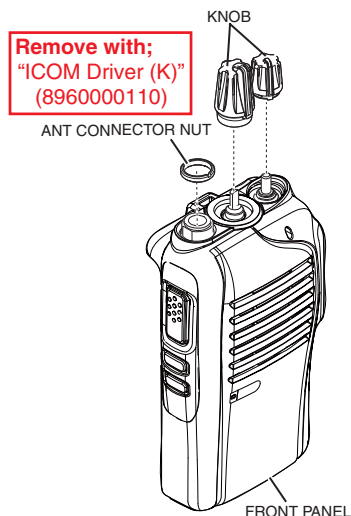

2) Remove 2 screws from the bottom of the CHASSIS.


3) Lift the bottom of the CHASSIS up in the direction of the arrow.

BE CAREFUL to not pull out the **speaker wire** when separating the CHASSIS and the FRONT PANEL.

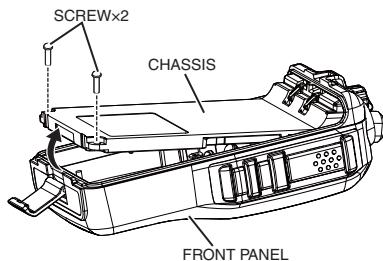


For easy separation of the CHASSIS


Use a suction lifter to lift the bottom of the CHASSIS up.

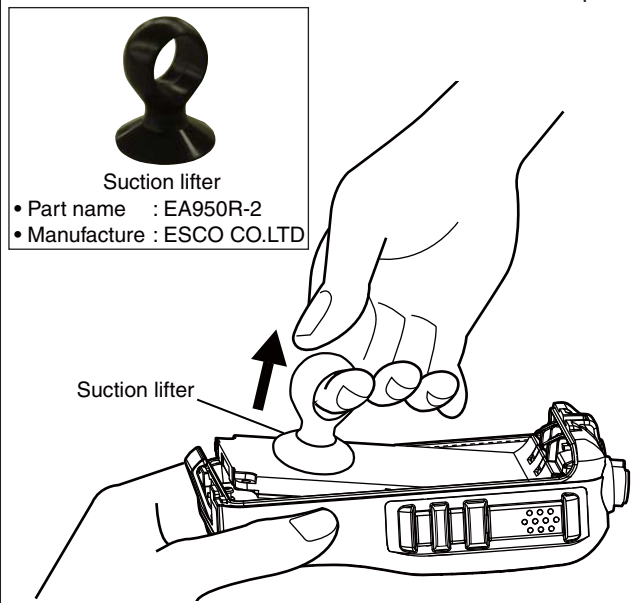

4) CAREFULLY lift the chassis out of the FRONT PANEL and turn it over in order to unplug the speaker wire.

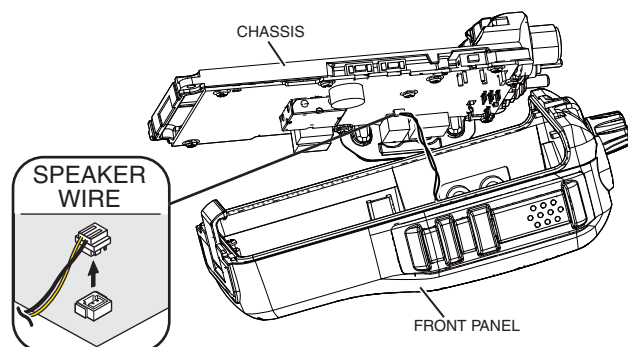


5) Remove the seals and nuts from the CHASSIS.

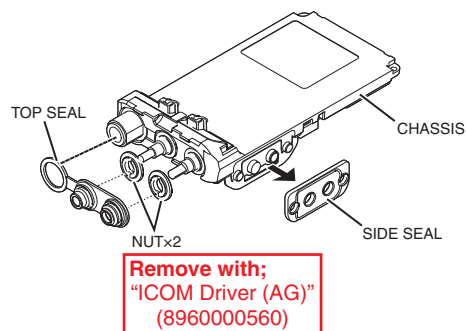

2. REMOVING THE MAIN UNIT

1) Remove the 9 screws and the side plate from the MAIN UNIT.

2) Unsolder the 2 points shown, and then remove the MAIN UNIT.

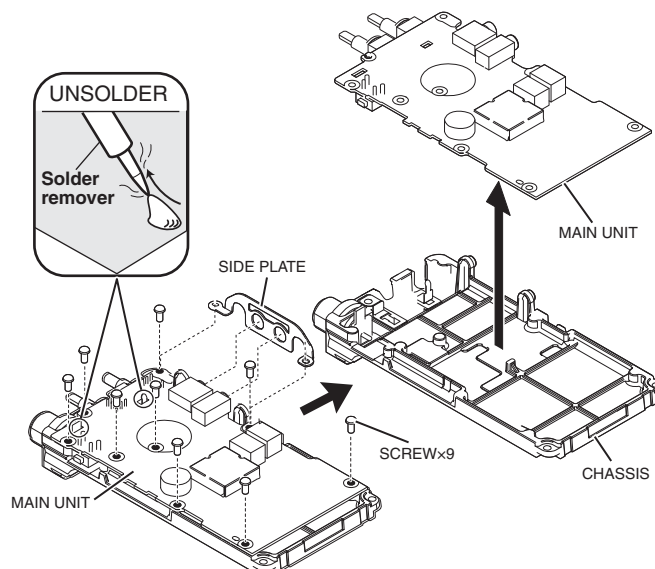

(Continued to the right above)


4-1 RECEIVER CIRCUITS

RF CIRCUITS

The RX signal from the antenna is passed through the LPF and antenna SW (D1, D22, D23), then filtered by the 2-staged tuned BPF (D24 and D26) to eliminate unwanted out-of-band signals. The filtered RX signal is amplified by the RF AMP (Q22), and filtered by another 2-staged tuned BPF (D28) to obtain a good image response, then applied to the 1st IF circuits.

The BPFs are tuned to the RX frequency by applying adequate tuning voltages: "T1" and "T2" to the variable capacitors.


• RF CIRCUITS

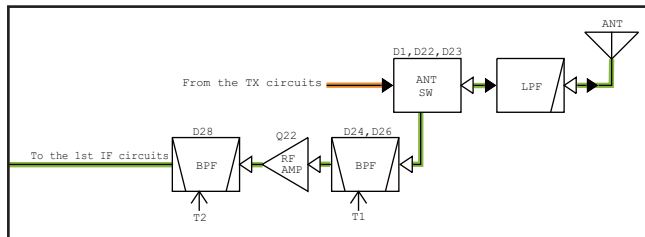

1ST IF CIRCUITS

The RX signal from the RF circuits is applied to the 1st IF mixer (Q23) and mixed with the 1st LO signal from the RX VCO, resulting in the 46.35 MHz 1st IF signal. The 1st IF signal is passed through the IF SWs (D31–D34) and the crystal filter (FI1: analog mode, FI2: digital mode) to be filtered, amplified by the 1st IF AMP (Q24), then applied to the 2nd IF circuits.

• 1ST IF CIRCUITS

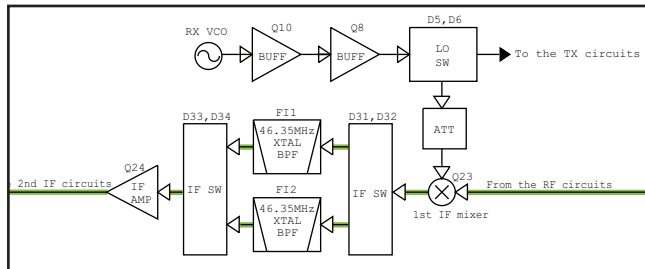

2ND IF AND DEMODULATOR CIRCUITS

The signal from the 1st IF circuits is applied to the IF demodulator IC (IC3) which contains the 2nd IF mixer, 2nd IF AMP, FM detector, squelch circuit and AF AMP in its package.

The 1st IF signal is applied to the 2nd IF mixer and mixed with the 2nd LO signal resulting in the 450 kHz 2nd IF signal.

The 2nd LO signal is generated by tripling the 15.3 MHz reference frequency signal generated by the reference frequency oscillator (TCXO; X2).

• WHILE OPERATING IN THE ANALOG MODE

The 2nd IF signal is filtered by the 2nd IF filter (FI3: wide/middle mode) or filters (FI3 and FI4: narrow) to eliminate unwanted signals. It is amplified by the 2nd IF AMP, and then demodulated by the detector circuit, which employs the discriminator (X1) as the phase shifter.

The demodulated AF signal is amplified by the AF AMP (IC21), and then applied to the linear codec (IC902) through the filter SW (Q901). The filter SW toggles the frequency response of the AF filter (R904, R908, C924), according to the type of reception; Wide, Mid or Narrow.

The AF signal is converted into a digital audio signal by the linear codec (IC902), processed by the DSP (IC903), and then decoded into an analog audio signal.


• WHILE OPERATING IN THE DIGITAL MODE

The 2nd IF signal is filtered by the 2nd IF filters (FI3 and FI4) to eliminate unwanted signals and applied to the IF AMP (IC5) through the buffer (Q28). The amplified 2nd IF signal is passed through the ceramic filter (FI5), and then directly applied to the DSP (IC903).

The 2nd IF signal is demodulated by the DSP (IC903), and then applied to the linear codec (IC902) to be decoded into an analog audio signal.


The AF signal is applied to the RX AF circuits.

• 2ND IF AND DEMODULATOR CIRCUITS

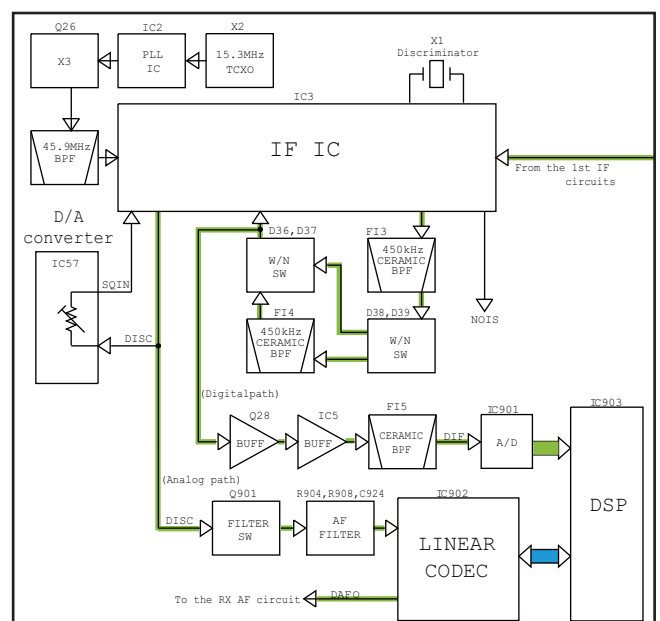

The demodulated AF signal from the linear codec (IC902) is passed through the LPF (IC60C), and then adjusted in level by the D/A converter (IC57). The level-adjusted AF signal is then amplified by AF AMPs (IC58 and IC55).

- **RX AF CIRCUITS**

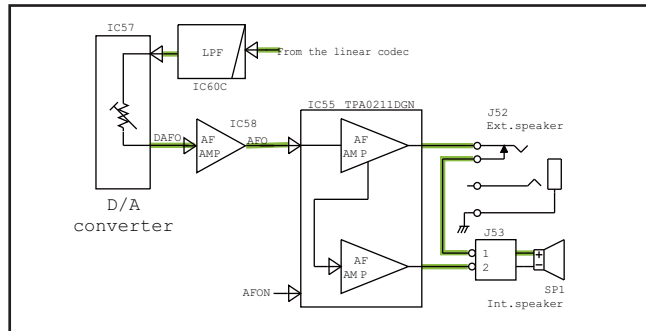

The squelch circuit cuts off the AF output signals when no RF signals are received. Detecting noise components in the demodulated AF signals, the squelch circuit stops audio signals being emitted.

If the noise level is higher than the preset one, the internal comparator set the “NOISE” signal to the CPU to “High”, then the CPU turns the “AFON” signal which controls the AF power AMP (IC55) to “Low,” to inactivate it.

NOISE SQUELCH DIAGRAM

The diagram illustrates the noise squelch circuit. It starts with a signal from the IF IC (IC3, Pin16) entering a DAC (IC57). The output of the DAC (Pin15) goes through a noise filter, which consists of a resistor and two capacitors (labeled 7 and 8). The filtered signal then enters the Noise AMP (IC3). The output of the Noise AMP goes through a Noise detector and a Comparator, which produces the final 'NOIS' output (Pin13).

The audio signal from the internal or external microphone (MIC signal) is passed through the MIC gain SW (IC62), and then applied to the MIC AMP (IC64).

The amplified MIC signal is passed through the HPF (IC63A), which attenuates frequencies 300 Hz and below, and then applied to the limiter AMP (IC60A). The amplitude-limited MIC signal is applied to the linear codec (IC902) through the MIC line SW (IC66).

The amplified MIC signal is applied to the ALC (IC63B) which keeps the signal level fixed.


The MIC signal is converted into a digital audio signal by the linear codec (IC902), processed by the DSP (IC903), and then converted into the digital baseband signal (modulation signal).

The signal from the linear codec (IC902) is passed through the LPF (IC60B), and then applied to the D/A converter (IC57) which adjusts its level (=deviation). The level-adjusted modulation signal is applied to the modulation circuit.

MODULATION CIRCUIT

The modulation signal from the TX AF circuits is applied to D15 of the TX VCO (Q14, D14–D17) to modulate it (FM for the analog mode, 4FSK for the digital mode). The modulated signal from the TX VCO is buffer-amplified by two buffers (Q8, Q10), and applied to the TX AMP circuits through the LO SW (D5, D6).

• MODULATION CIRCUIT

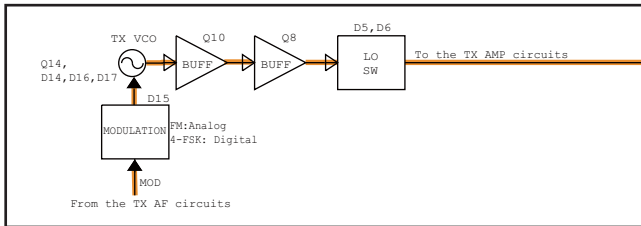


TX AMPLIFIERS

The buffer amplified signal from the TX/RX SW (D5, D6) is sequentially amplified by the pre-drive AMP (Q3), drive AMP (Q2), and power AMP (Q1), to obtain TX power. The amplified TX signal is passed through the antenna SW (D1, D22, D23) and the LPF, which eliminates harmonics, and then fed to the antenna.

APC CIRCUITS

D7 and D8 rectify a portion of the TX signal to direct current, and the APC AMP (IC1) compares the voltage and the TX power control reference voltage, "T1." The resulting voltage controls the gain of the power and drive AMPs to keep the TX power constant.

• TX AMPLIFIERS AND APC CIRCUITS

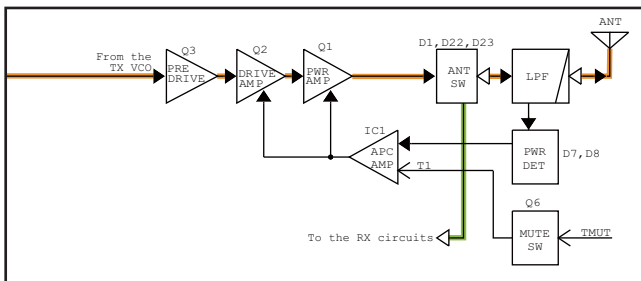

4-3 FREQUENCY SYNTHESIZER CIRCUITS

The RX VCO is composed of Q13, and D11–D13. The VCO output signal is buffer-amplified by two buffers (Q8 and Q10) and applied to the 1st IF mixer, through the LO SW (D6) and the attenuator.


The TX VCO is composed of Q14 and D14–D17. The VCO output signal is buffer-amplified by two buffers (Q8 and Q10) and applied to the pre-driver (Q3), through the LO SW (D5) and the LPF.

A portion of signal generated by each VCO is fed back to the PLL IC (IC4, pin 17) through the buffer (Q9) and the LPF (L46, C167–C169).


The applied VCO output signal is divided and phase-compared with a 15.3 MHz reference frequency signal from the TCXO (X2), which is also divided. The resulting signal is output from the PLL IC (IC4), and DC-converted by the loop filter, and then applied to the VCO as the lock voltage.

When the oscillation frequency drifts, its phase changes from that of the reference frequency, causing a lock voltage change to compensate for the drift in the VCO oscillating frequency.

• FREQUENCY SYNTHESIZER CIRCUITS

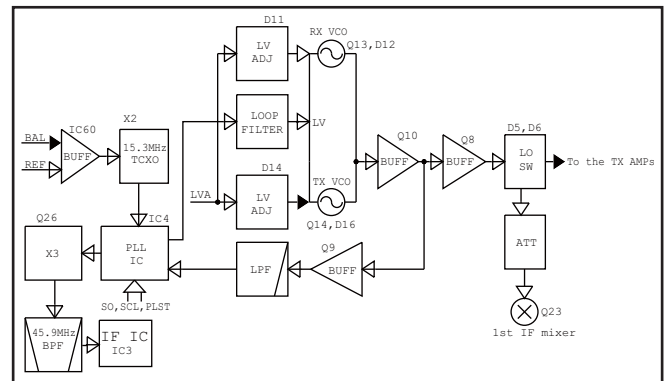

5-4 VOLTAGE DIAGRAMS

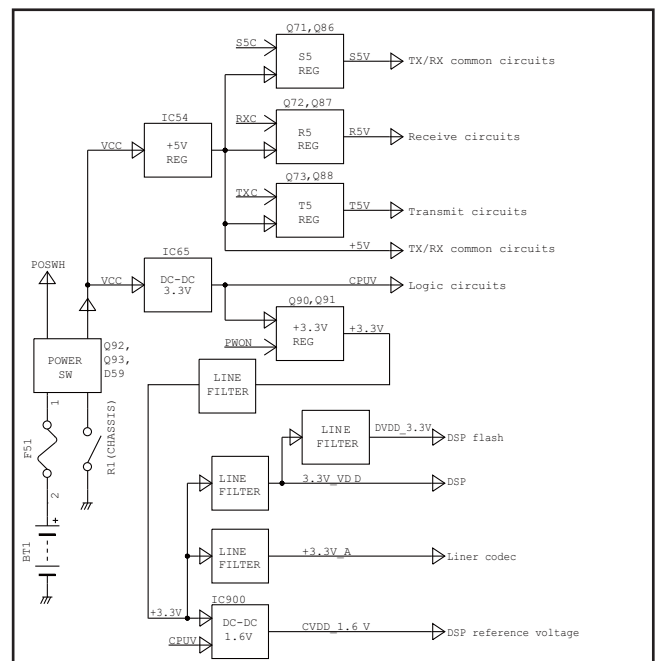

4-5 PORT ALLOCATIONS

• CPU (IC51)

BALL No.	LINE NAME	DESCRIPTION	I/O
A5	RXC	Power supply switching control. H= During receive or stand-by.	O
A6	RMUTE	RX AF mute switch control. L= During the squelch circuit is activated.	O
A7	DMOSI	Serial data to the DSP (IC903).	O
A15	PWON	Power supply switching control. H= The transceiver's power is ON.	O
B12	NOIS	Noise level detect. H= Squelch close	I
B15	AFON	AF power AMP control. H= AF power AMP (IC55) is activated.	O
C1, C2	CBI2, CBI0	[ROTARY SELECTOR] input.	I
C5	TXC	Power supply switching control. H= While transmitting.	O
C8	ESDA	EEPROM (IC52) serial data.	I/O
C13	POSW	[POWER] input.	I
C14	ADS	1st IF filters (FI1 and FI2) switching control. L= During digital mode.	O
C15	NWC	Receive mode (narrow/mid/wide) switching. L= During narrow mode.	O
D2, D3	CBI3, CBI1	[ROTARY SELECTOR] input.	I
D6	DSCK	DSP (IC903) clock.	O
D8	ESCL	EEPROM (IC52) clock.	O
D13	DPDN	DSP (IC903) power control. H= DSP is inactivated	O
D14	DRES	DSP (IC903) reset. L= Reset	O
D15	CSFT	Clock frequency shift. H= Clock frequency is shifted.	O
E13	RES	CPU reset.	I
H1	SIDE1	[UPPER] key input. L= Pushed	I
H2	SIDE2	[LOWER] key input. L= Pushed	I
J1	IPTT	Internal [PTT] input. L= Pushed.	I
J2	XPTT	External PTT input. H= An external PTT is pushed.	I
L1, L2	MCG0, MCG1	MIC gain control.	O
L12	TLED	Busy LED (Red) control. L= LED lights (While transmitting)	O
L13	RLED	Busy LED (Green) control. L= LED lights. (While receiving a signal)	O
L14	SSO	Common serial data.	O
L15	SCK	Common clock.	O
M1	TMUT	Transmission mute. L= TX inhibit.	O
M2	ATX	Automatic TX control for VOX mode. H= While MIC audio from the connected headset is detected.	O
M8	BEEP	Beep audio. (Square waves)	O
M11	MDET	External connection detect.	I
M14	DAST	D/A converter (IC57) strobe. H= Load enable.	O

BALL No.	LINE NAME	DESCRIPTION	I/O
N11	VOXV	Microphone input sensing voltage.	I
N12	BATV	Battery voltage sensing.	I
N14	DMISO	DSP (IC903) serial data.	O
P4	PLSW	PLL lock up time control. L= Fast lock up	O
P10	TEMP	Temperature sensing voltage.	I
P11	RSSI	RSSI sensing voltage.	I
P12	AFVI	[VOLUME CONTROL] input.	I
P15	DSS	DSP (IC903) chip select.	O
R3	S5C	Power supply line "S5C" switching control. H= Supplying current to the TX/RX common circuits.	O
R4	PLST	PLL strobe.	O
R9	MDWN	Man down detect. L= While the transceiver is horizontal.	I
R10	LVIN	Lock voltage input.	I

• D/A CONVERTER (IC57)

PIN No.	LINE NAME	DESCRIPTION
23	T1 (TXPO)	During receiving: Outputs BPF tuning voltage. During transmitting: TX power reference voltage.
24	T2	Outputs BPF tuning voltage
7	REF	Outputs Reference frequency adjust voltage.
8	LVA	Outputs Additional lock voltage adjustment.
11	SQLC	Outputs Squelch threshold setting.
12	TENC	Outputs CTCSS deviation adjustment.
19	BAL	Outputs DTCS balance.
20	VRAF	Outputs Max. deviation/AF volume adjustment.


SECTION 5 ADJUSTMENT PROCEDURE

5-1 PREPARATION


■ REQUIRED EQUIPMENTS

EQUIPMENT	GRADE AND RANGE	EQUIPMENT	GRADE AND RANGE
Cloning software	CS-F3100D/F5120D CLONING SOFTWARE (Revision 1.0 or later)	JIG cable	Modified OPC478UC (See the illust below)
RF power meter (50 Ω terminated)	Measuring range : 0.1–10 W Frequency range : 100–300 MHz SWR : Less than 1.2 : 1	Frequency counter	Frequency range : 0.1–300 MHz Frequency accuracy : ± 1 ppm or better Input level : Less than 1 mW
Modulation Analyzer	Frequency range : 30–300 MHz Measuring range : 0 to ± 10 kHz	Standard signal generator (SSG)	Frequency range : 0.1–300 MHz Output level : -20 dB μ to 90 dB μ (-127 to -17 dBm)
AC millivoltmeter	Measuring range : 10 mV to 10 V	Attenuator	Power attenuation : 30 dB Capacity : More than 10 W
Oscilloscope	Frequency range : DC–20 MHz Measuring range : 0.01–20 V	External speaker	Input impedance : 8 Ω Capacity : More than 1 W
Audio generator (AG)	Frequency range : 300–3000 Hz Output level : 1–500 mV		

■ JIG CABLE

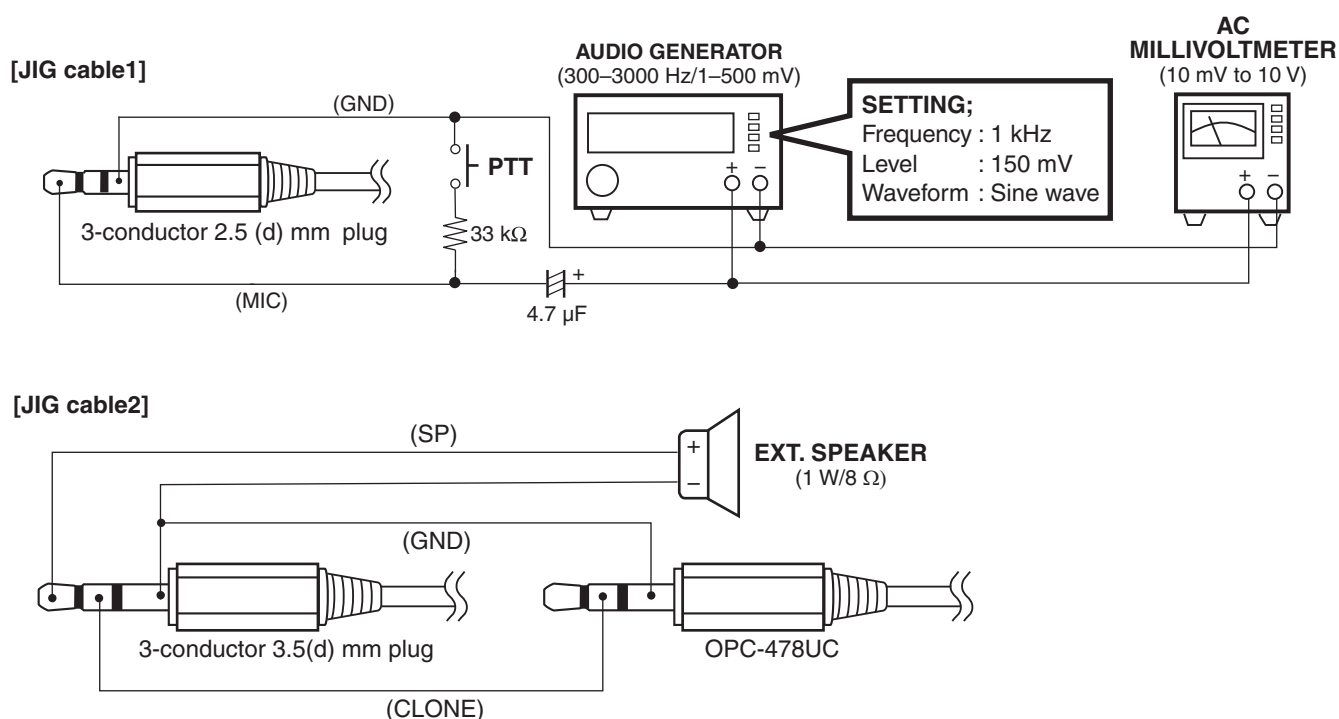

CONNECTION

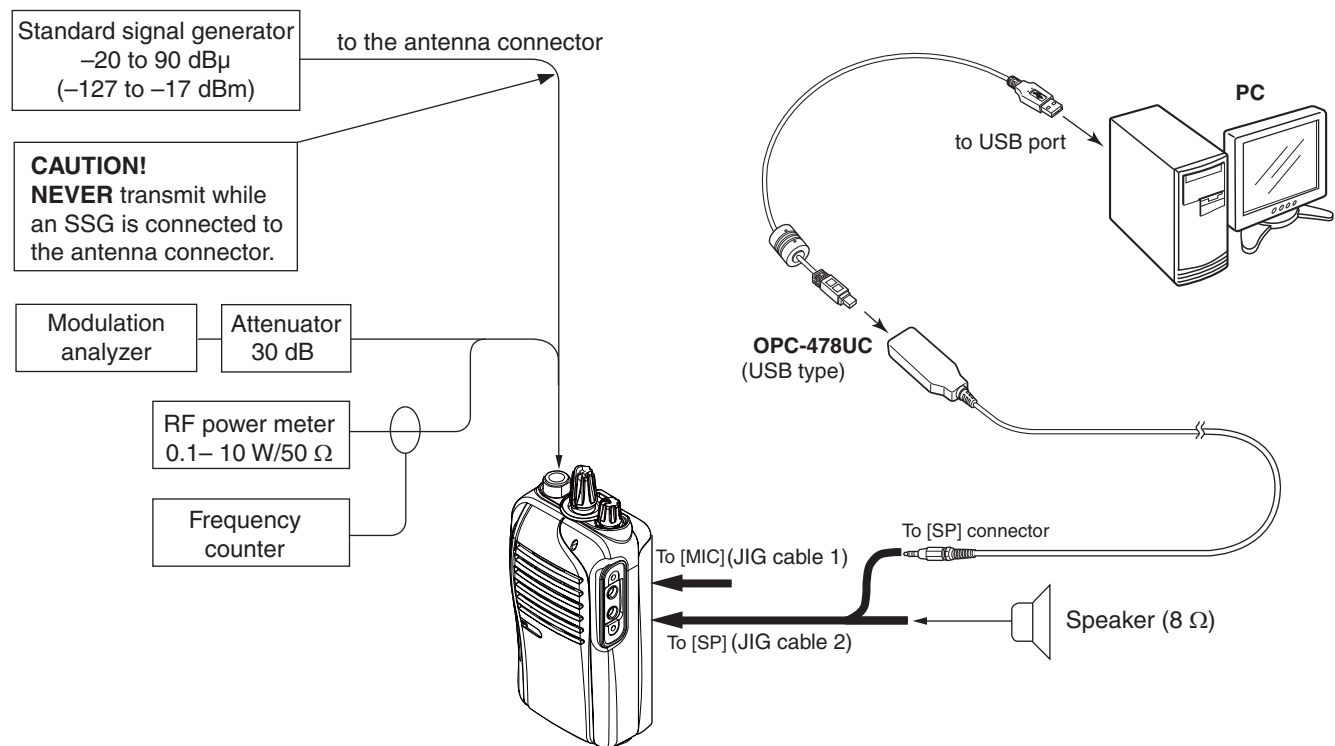

ADJUSTMENT CHANNELS

Before starting the adjustments, use the cloning software to create the same cloning file as shown below, then upload it into the transceiver.

Frequency (MHz)										C.Tone							CH Type
CH	Atr	Inh	RX	TX	TX Inh	Beat Cancel	W/N	SQL Tight	RX	TX	Te	TOT	RF PWR	PWR Save	Auto	ear	
1- 1	AB		174.000000	<-		OFF	W						L1				Analog
1- 2			136.000000	<-		OFF	W						L1				Analog
1- 3			155.000000	<-		OFF	W						H				Analog
1- 4			155.000000	<-		OFF	W						L2				Analog
1- 5			155.000000	<-		OFF	W						L1				Analog
1- 6			136.000000	<-		OFF	W						L1				Digital
1- 7			155.000000	<-		OFF	W						L1				Digital
1- 8			174.000000	<-		OFF	W						L1				Digital
1- 9			155.000000	<-		OFF	W			151.4			L1				Analog
1- 10			155.000000	<-		OFF	W			007N			L1				Analog
1- 11			155.000000	<-		OFF	N						L1				Analog
1- 12			136.000000	<-	i	OFF	W						L1				Analog
New																	

CONVENIENT: The cloning data file for the adjustment, as described in this service manual, is attached.

Right click the clip icon, and select "Save Embedded File to Disk."



ADJUSTMENT UTILITY

Untitled - CS-F3100D/F5120D

File View COM Port Clone Model Adjust Help

Adjust Utility

Setting

CH No. 1 RX=136.10000, TX=136.10000
RF Power=High, Mode=Narrow
CH Type=Analog
Analog Voice
Analog

TX Mode 1
RX Mode 1

Adjust

Power (Hi) 174 [#####-----]
Power (L2) 95 [#####-----]
Power (L1) 59 [###-----]

BAL (Wide) 98 [#####-----]
BAL (Mid) 98 [#####-----]
BAL (Narrow) 98 [#####-----]
BAL (Digital) 98 [#####-----]

MOD (Wide) 171 [#####-----]
MOD (Mid) 145 [#####-----]
MOD (Narrow) 81 [#####-----]
MOD (Digital) 109 [#####-----]

CTCSS DEVIATION CTCSS 125 [#####-----]
DTCS DEVIATION DTCS 0 [-----] 0 = CTCSS Level
SQUELCH SQL 52 [###-----]

REFERENCE FREQUENCY REF 165 [#####-----]

SENSITIVITY BPF C ALL [Enter] to Sweep
BPF T1 C 66 [#####-----] [Enter] to Sweep
BPF T2 C 47 [###-----] [Enter] to Sweep
BPF L ALL [Enter] to Sweep
BPF T1 L 64 [#####-----] [Enter] to Sweep
BPF T2 L 64 [#####-----] [Enter] to Sweep
BPF H ALL [Enter] to Sweep
BPF T1 H 64 [#####-----] [Enter] to Sweep
BPF T2 H 64 [#####-----] [Enter] to Sweep

PLL LOCK VOLTAGE (RX) RX LVA (Adjust) 52 [#####-----] [Enter] to Sweep
RX LVA (Check) 0 [#####-----] [Enter] to Check
PLL LOCK VOLTAGE (TX) TX LVA (Adjust) 56 [#####-----] [Enter] to Sweep
TX LVA (Check) 0 [#####-----] [Enter] to Sweep
LV(RX LVA Adjust) Low 183 3.66V
LV(RX LVA Adjust) High 187 3.74V
LV(RX LVA Check) Low 45 0.90V
LV(RX LVA Check) High 80 1.60V
LV(RX LVA Adjust 2) Low 50 1.00V
LV(RX LVA Adjust 2) High 75 1.50V
LV(TX LVA Adjust) Low 173 3.46V
LV(TX LVA Adjust) High 177 3.54V
LV(TX LVA Check) Low 45 0.90V
LV(TX LVA Check) High 75 1.50V
LV(TX LVA Adjust 2) Low 50 1.00V
LV(TX LVA Adjust 2) High 70 1.40V

S-METER RSSI 130 [Enter] to Capture
BAL Start [Enter] to Prepare
BAL 1 0 [-----]
BAL 2 0 [-----]
BAL 3 0 [-----]
MOD N Start [Enter] to Prepare
MOD N L 0 [-----]
MOD N C 0 [-----]
MOD N H 0 [-----]
MOD M Start [Enter] to Prepare
MOD M L 0 [-----]
MOD M C 0 [-----]
MOD M H 0 [-----]
MOD W Start [Enter] to Prepare
MOD W L 0 [-----]
MOD W C 0 [-----]
MOD W H 0 [-----]
MOD D Start [Enter] to Prepare
MOD D L 0 [-----]
MOD D C 0 [-----]
MOD D H 0 [-----]

DIGITAL DEVIATION S.Tone 85 [#####-----]

2/5 TONE DEVIATION


Password

5-2 FREQUENCY ADJUSTMENTS

- 1) Select an adjustment item using [↑]/[↓] on the PC's keyboard.
- 2) Set or modify the adjustment value as specified using [←]/[→] on the PC's keyboard, then push [ENTER].

ADJUSTMENT	TRANSCEIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
PLL LOCK VOLTAGE (RX)	1 • Channel : 1-1 • Receiving	1) Connect an RF power meter to the antenna connector. 2) Set the preset adjustment value on the adjustment utility window.	[RX LVA(Adjust)]	3.70 V
(TX)	2 • Channel : 1-1 • Transmitting		[TX LVA(Adjust)]	3.50 V
(RX)	3 • Channel : 1-2 • Receiving	• Click the [Update (F5)] button to check on the "I/O Check window" as below.	[LVIN] (On the "I/O Check window")	0.9–1.6 V (Verify)
(TX)	4 • Channel : 1-2 • Receiving			0.9–1.5 V (Verify)
REFERENCE FREQUENCY	1 • Channel : 1-1 • Transmitting	• Loosely couple a frequency counter to the antenna connector.	[REF]	174.000000 MHz (±250 Hz)

• I/O Check window

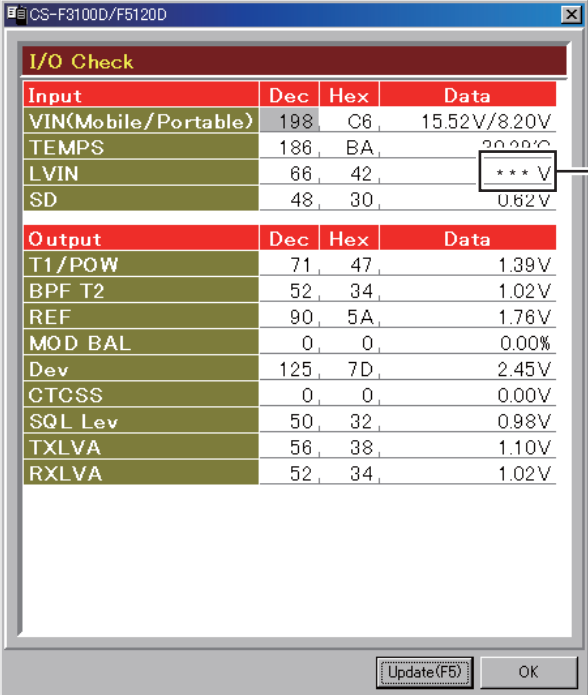

I/O Check			
Input	Dec	Hex	Data
VIN(Mobile/Portable)	198	C6	15.52V/8.20V
TEMPS	186	BA	20.20°C
LVIN	66	42	*** V
SD	48	30	0.62V
Output	Dec	Hex	Data
T1/POW	71	47	1.39V
BPF T2	52	34	1.02V
REF	90	5A	1.76V
MOD BAL	0	0	0.00%
Dev	125	7D	2.45V
CTCSS	0	0	0.00V
SQL Lev	50	32	0.98V
TXLVA	56	38	1.10V
RXLVA	52	34	1.02V


Lock voltage appears here

Values shown above are an example only. Each transceiver has own values.)

5-3 TRANSMIT ADJUSTMENTS

1) Select an adjustment item using [↑]/[↓] on the PC's keyboard.

2) Set or modify the adjustment value as specified using [←]/[→] on the PC's keyboard, then push [ENTER].

ADJUSTMENT		TRANSCIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
TX OUTPUT POWER (Hi power)	1	• Channel : 1-3 • Transmitting	• Connect an RF power meter to the antenna connector.	[Power (Hi)]	5.0 W
(L2 power)	2	• Channel : 1-4 • Transmitting		[Power (L2)]	2.0 W
(L1 power)	3	• Channel : 1-5 • Transmitting		[Power (L1)]	1.0 W
MODULATION BALANCE	1	• Channel : 1-11 • Transmitting	1) Set the TX mode to "2" on the "ADJUSTMENT UTILITY" screen. 2) Connect a modulation analyzer with an oscilloscope to the antenna connector through an attenuator, and set it as; HPF : OFF LPF : 15 kHz De-emphasis : OFF Detector : (P-P)/2	[MOD (Narrow)]	80
	2			[BAL (Narrow)]	As flat as possible.  No over or under shoot.
FM DEVIATION (Narrow)	1	• Channel : 1-11 • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[MOD (Narrow)]	±2.05 to ±2.15 kHz
(Wide)	2	• Channel : 1-5 • Transmitting	• Connect as audio generator to the [MIC] jack, and set it as; Frequency : 1 kHz Waveform : Sine wave Level : 150 mVrms	[MOD (Wide)]	±4.05 to ±4.15 kHz
DIGITAL DEVIATION (Band low)	1	• Channel : 1-6 • Transmitting	1) Set the TX mode to "16" on the "ADJUSTMENT UTILITY" screen. 2) Push [ENTER] on the PC's keyboard, to enter the digital deviation adjustment mode.	[MOD D Start]	—
	2		• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[MOD D L]	±1.36 to ±1.40 kHz
			• Connect as audio generator to the MIC jack, and set it as; Frequency : 1 kHz Waveform : Sine Level : 150 mVrms	[MOD D C]	
				[MOD D H]	
	5		• Push [ENTER] on the PC's keyboard, to store the value and quit the digital deviation adjustment mode.	[MOD D Start]	—
CTCSS DEVIATION	1	• Channel : 1-9 • No AF input from the MIC. • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[CTCSS]	±0.65 to ±0.75 kHz
DTCS DEVIATION	1	• Channel : 1-10 • No AF input from the MIC. • Transmitting	• Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[DTCS]	±0.65 to ±0.75 kHz
2/5 TONE, DTMF DEVIATION	1	• Channel : 1-11 • Transmitting	1) Set the TX mode to "5" on the "ADJUSTMENT UTILITY" screen. 2) Connect a modulation analyzer to the antenna connector through an attenuator, and set it as the "MODULATION BALANCE."	[S.Tone]	±1.45 to ±1.55 kHz

5-4 RECEIVE ADJUSTMENTS

1) Select an adjustment item using [\uparrow]/[\downarrow] on the PC's keyboard.

2) Set or modify the adjustment value as specified using [\leftarrow]/[\rightarrow] on the PC's keyboard, then push [ENTER].

ADJUSTMENT	TRANSCIVER'S CONDITION	OPERATION	ADJUSTMENT ITEM	VALUE
SENSITIVITY	NOTE: "RECEIVE SENSITIVITY" must be adjusted before "S-METER." Otherwise, "S-METER" will not be adjusted properly. When "RECEIVE SENSITIVITY" is re-adjusted, "S-METER" must be also re-adjusted.			
	1	<ul style="list-style-type: none"> Channel : 1-12 Receiving <ul style="list-style-type: none"> Connect an SSG to the antenna connector and set it as; <ul style="list-style-type: none"> Frequency : 136 MHz Level† : +20 dBμ (−87 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz 	[BPF C ALL]	Push [ENTER] (Automatic adjustment)
S-METER	1	<ul style="list-style-type: none"> Channel : 1-12 Receiving <ul style="list-style-type: none"> Connect an SSG to the antenna connector and set it as; <ul style="list-style-type: none"> Frequency : 136 MHz Level† : +23 dBμ (−84 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz 	[RSSI S3 Level]	Push [ENTER] (Automatic adjustment)
	2	<ul style="list-style-type: none"> Channel : 1-12 Receiving <ul style="list-style-type: none"> Set the SSG as; <ul style="list-style-type: none"> Level† : −7 dBμ (−114 dBm) 	[RSSI S1 Level]	
SQUELCH	1	<ul style="list-style-type: none"> Channel : 1-12 Receiving <ol style="list-style-type: none"> Connect an SSG to the antenna connector and set it as; <ul style="list-style-type: none"> Frequency : 136 MHz Level† : −13 dBμ (−120 dBm) Modulation : 1 kHz Deviation : ±3.0 kHz Once close the squelch by increasing [SQL] value, then decrease the value to open the squelch. 	[SQL]	Squelch opens (Push [ENTER] to store the value)

†; The output level of the standard signal generator (SSG) is indicated as the SSG's open circuit.

SECTION 6

PARTS LIST

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
IC1	1110002751	S.IC TA75S01F(TE85RF)	T	32.5/8.9
IC3	1110007320	S.IC NJM2591V-TE1-#ZZZB	B	45.8/38.9
IC4	1130015270	S.IC AK1541P-L	T	43.2/24.0
IC5	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	68.3/44.2
IC6	1130011741	S.IC TC7W66FK(TE85LF)	B	65.3/26.7
IC21	1110002751	S.IC TA75S01F(TE85RF)	T	69.8/34.6
IC51	1140015010	S.IC HD64F2506RBR26DV(EMPTY)	B	83.0/14.3
IC52	1130015080	S.IC R1EX24512ASAS0A	T	83.7/16.4
IC53	1110007780	S.IC NJU7704F3-28A-TE1-#ZZZH	T	85.0/11.3
IC54	1180003600	S.REG NJM2871BF05-TE1-#ZZZB	T	15.5/34.8
IC55	1110007610	S.IC TPA0211DGNR	B	13.3/42.1
IC57	1110007290	S.IC AK2330P-L	B	72.3/24.5
IC58	1110002751	S.IC TA75S01F(TE85RF)	T	23.9/28.3
IC60	1110005320	S.IC NJM13403V-TE1-#ZZZB	B	65.1/8.3
IC62	1130011741	S.IC TC7W66FK(TE85LF)	T	60.9/11.3
IC63	1110007630	S.IC NJM2783V-TE1-#ZZZH	T	71.9/9.8
IC64	1110005330	S.IC NJM12904V-TE1-#ZZZB	T	67.1/9.8
IC65	1180003670	S.REG BD9141MUV-E2	T	96.5/9.1
IC66	1130009981	S.IC TC7W53FK(TE85LF)	T	75.9/8.5
IC900	1180003680	S.REG TPS62204DBVR	T	76.4/39.0
IC901	1190002900	S.IC ADS7886SDCKR	T	77.5/32.5
IC902	1110007770	S.IC PCM3008T/K	B	78.6/34.7
IC903	1140013290	S.IC TMS320VC5509AZHH	T	86.8/36.8
IC904	1130015620	S.IC EN25Q40-100GIP <MSK>	T	78.0/28.4
IC905	1110006230	S.IC NJM2711F-TE1-#ZZZB	B	80.2/46.0
Q1	1560001700	S.FET RD07MUS2B-T112	B	28.6/13.5
Q2	1560001241	S.FET RD01MUS1-T113	B	36.3/14.4
Q3	1530003311	S.TRA 2SC5107-O(TE85RF)	B	42.2/13.1
Q6	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	35.6/5.7
Q8	1530003311	S.TRA 2SC5107-O(TE85RF)	T	54.8/18.5
Q9	1530003311	S.TRA 2SC5107-O(TE85RF)	B	55.9/18.5
Q10	1530003311	S.TRA 2SC5107-O(TE85RF)	T	60.7/18.5
Q11	1590004070	S.TRA LDTCT144EET1G <SLVJ>	B	54.9/23.8
Q12	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	62.5/23.3
Q13	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	57.5/23.6
Q14	1530002921	S.TRA 2SC4226-T1 Y25 (R25)	T	60.0/23.6
Q15	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	64.2/18.7
Q16	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	68.2/21.9
Q17	1560000541	S.FET 2SK880-Y(T5RICOMF)	B	50.9/29.7
Q21	1560000841	S.FET 2SK1829(TE85RF)	B	28.4/30.5
Q22	1580000731	S.FET 3SK293(TE85LF)	B	25.0/27.8
Q23	1580000731	S.FET 3SK293(TE85LF)	B	36.4/26.1
Q24	1530003311	S.TRA 2SC5107-O(TE85RF)	B	38.3/42.6
Q26	1530002851	S.TRA 2SC4116-BL(TE85RF)	T	43.3/32.7
Q27	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	56.3/35.9
Q28	1530002851	S.TRA 2SC4116-BL(TE85RF)	B	63.6/44.7
Q29	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	38.5/42.6
Q51	1510001090	S.TRA KTA2015Y-RTK/P	B	25.7/43.5
Q52	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	24.6/39.8
Q58	1590004220	S.TRA DRA9123YOL	B	54.9/7.1
Q59	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	49.1/7.3
Q63	1520000460	S.TRA 2SB1132 T100 R	B	15.3/35.5
Q64	1590001190	S.TRA XP6501-(TX).AB	B	19.3/36.0
Q67	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	75.4/13.1
Q71	1510001090	S.TRA KTA2015Y-RTK/P	B	66.9/16.6
Q72	1510000771	S.TRA 2SA1586-GR(TE85LF)	B	65.8/37.4
Q73	1510001090	S.TRA KTA2015Y-RTK/P	B	70.2/12.5
Q81	1590004100	S.TRA LDTCT144TET1G <SLVJ>	B	93.4/20.3
Q82	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	79.1/19.5
Q83	1590004050	S.TRA LDTA144EET1G <SLVJ>	T	78.5/17.5
Q84	1590004070	S.TRA LDTCT144EET1G <SLVJ>	B	19.2/43.8
Q85	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	21.5/33.0
Q86	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	70.6/16.3
Q87	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	68.5/35.7
Q88	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	72.5/12.3
Q90	1510000920	S.TRA 2SA1577 T106 Q	T	92.4/12.8
Q91	1590004090	S.TRA LDTCT114YET1G <SLVJ>	T	90.1/14.8
Q92	1590003321	S.FET TPC6103(TE85LF)	B	6.9/35.0
Q93	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	4.0/34.6
Q95	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	68.5/33.2
Q900	1590004050	S.TRA LDTA144EET1G <SLVJ>	B	73.5/48.8
Q901	1590004090	S.TRA LDTCT114YET1G <SLVJ>	B	75.1/27.8
D1	1750001910	S.DIO HVD144AKRF-E	B	16.2/16.3
D5	1750001890	S.DIO HVD142AKRF-E	B	49.6/15.2
D6	1750001890	S.DIO HVD142AKRF-E	B	49.6/16.6
D7	1750001820	S.DIO LRB706F-40T1G <SLVJ>	T	17.9/10.5
D8	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	14.5/14.2
D10	1790001241	S.DIO MA2S7280GL	B	63.1/16.7
D11	1750001880	S.VAR HVL375CKRF-E	T	57.4/29.2
D12	1750001550	S.VAR HVD376BKRF-E	T	54.1/25.6
D13	1750001550	S.VAR HVD376BKRF-E	T	55.1/25.6
D14	1750001880	S.VAR HVL375CKRF-E	T	59.3/27.1
D15	1750001570	S.VAR HVL355CMKRF-E	T	59.3/29.2
D16	1750001550	S.VAR HVD376BKRF-E	T	63.7/25.1
D17	1750001550	S.VAR HVD376BKRF-E	T	62.8/23.2
D21	1750001810	S.DIO L1SS400T1G <SLVJ>	B	30.3/32.4
D22	1750001910	S.DIO HVD144AKRF-E	B	16.2/20.5
D23	1750001910	S.DIO HVD144AKRF-E	B	14.1/23.3
D24	1750001880	S.VAR HVL375CKRF-E	B	17.4/27.7
D26	1750001880	S.VAR HVL375CKRF-E	B	18.4/27.7
D28	1750001780	S.VAR HVB350BYPTL-E	B	31.0/27.8
D31	1750001910	S.DIO HVD144AKRF-E	B	40.3/30.1
D32	1750001910	S.DIO HVD144AKRF-E	T	36.6/28.4
D33	1750001910	S.DIO HVD144AKRF-E	B	36.7/39.8

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
D34	1750001910	S.DIO HVD144AKRF-E	T	36.5/41.0
D36	1750001790	S.DIO 1SS390 TE61	B	54.1/40.0
D37	1750001790	S.DIO 1SS390 TE61	B	51.7/36.8
D38	1750001790	S.DIO 1SS390 TE61	B	56.6/40.0
D39	1750001790	S.DIO 1SS390 TE61	B	58.1/38.6
D51	1750001820	S.DIO LRB706F-40T1G <SLVJ>	B	91.9/17.8
D52	1790001241	S.DIO MA2S7280GL	B	26.2/41.0
D53	1750001810	S.DIO L1SS400T1G <SLVJ>	T	61.8/6.8
D54	1750001810	S.DIO L1SS400T1G <SLVJ>	T	60.5/6.8
D55	1750001810	S.DIO L1SS400T1G <SLVJ>	B	22.8/34.9
D59	1750001850	S.DIO LDAN222T1G <SLVJ>	B	4.2/37.5
D60	1750001790	S.DIO 1SS390 TE61	B	85.0/23.6
D901	1790001241	S.DIO MA2S7280GL	T	87.1/27.9
D902	1790001241	S.DIO MA2S7280GL	B	86.2/44.9
D903	1790001241	S.DIO MA2S7280GL	B	92.1/30.8
D904	1790001241	S.DIO MA2S7280GL	T	88.4/27.9
D905	1790001241	S.DIO MA2S7280GL	B	96.3/30.8
F11	20300000870	S.MON MFT46.3P3 46.350 MHz (FL-442)	B	35.4/34.1
F12	20100022760	S.XTA MFT46.3J 46.350 MHz (FL-448)	T	36.6/34.5
F13	2020002410	CER LTM450FW <JJE>		
F14	2020002570	CER LTM450HW <JJE>		
F15	2020002610	S.CER LTUCG450G <JJE>	T	65.2/43.3
X1	60700000310	S.DIS JTBM450CX70 <JJE>	T	47.6/40.9
X2	6050013000	S.XTA CR-892 TTS14VSB-A8 15.3 MHz	T	41.9/15.0
X51	6050013160	S.XTA CR-912 TSS3225A 19.6608 MHz	T	81.8/21.4
X900	6050013170	S.XTA CR-914 TTS18VSE-A11 12.288 MHz	B	75.1/46.0
L1	6200012780	S.COI 0.30-1.4-6TL 27.2N <COMO>	B	9.4/7.9
L2	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	9.6/11.7
L3	6200012910	S.COI 0.35-1.6-8TL 45.5N <COMO>	B	11.2/15.6
L4	6200002861	S.COI NLV25T-4R7J	B	18.4/17.8
L5	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	18.4/14.1
L6	6200012390	S.COI 0.30-0.92-3TR 5.8N <COMO>	B	22.0/14.1
L7	6200013010	S.COI 0.30-0.9-5TL 10.3N <COMO>	B	24.3/15.3
L8	6200013100	S.COI 0.45-1.5-5TL 18.3N <COMO>	B	25.2/19.0
L9	6200007871	S.COI ELJRF 39NJFB	B	42.2/11.3
L11	6200012470	S.COI 0.30-1.7-7TL 45.3N <COMO>	B	14.1/19.6
L12	6200011021	S.COI ELJRF 82NJFB	B	12.4/23.1
L13	6200008090	S.COI LQW2BHN68NJ03L	B	14.9/26.8
L14	6200008090	S.COI LQW2BHN68NJ03L	B	20.9/26.8
L15	6200010910	S.COI LQW18AN56NG00D	B	27.1/27.8
L16	6200010910	S.COI LQW18AN56NG00D	B	33.3/27.5
L18	6200007901	S.COI ELJRF 22NJFB	B	32.8/13.4
L19	6200011011	S.COI ELJRF 68NJFB	B	34.4/23.9
L20	6200004770	S.COI ELJNC R56J-F	B	39.1/26.4
L23	6200012170	S.COI MLG1608S R18J-T	T	41.9/35.7
L24	6200012170	S.COI MLG1608S R18J-T	T	45.2/34.2
L31	6200011031	S.COI ELJRF R10JFB	T	56.6/17.7
L32	6200011031	S.COI ELJRF R10JFB	B	56.5/20.4
L33	6200011031	S.COI ELJRF R10JFB	T	62.5/17.7
L34	6190002030	S.COI MLG1608S 1R0J-T	B	59.9/28.5
L35	6200008090	S.COI LQW2BHN68NJ03L	T	55.7/27.7
L36	6200003640	S.COI MLF1608E 100K-T	T	53.0/25.6
L37	6200007720	S.COI LQW2BHN33NJ03L	T	53.8/22.6
L38	6190002030	S.COI MLG1608S 1R0J-T	B	50.6/25.7
L39	6190002030	S.COI MLG1608S 1R0J-T	B	60.8/27.0
L40	6200007760	S.COI LQW2BHN82NJ03L	T	62.9/27.9
L41	6200003640	S.COI MLF1608E 100K-T	T	64.6/27.5
L42	6200008090	S.COI LQW2BHN68NJ03L	T	64.3/20.6
L43	6190002030	S.COI MLG1608S 1R0J-T	B	60.0/22.7
L46	6200007881	S.COI ELJRF 33NJFB	B	48.8/20.1
L51	6200014170	S.COI VLFCF4028T-4R7N1R5-2	T	96.5/14.3
L900	6200014160	S.COI VLFCF4028T-100M1R0-2	T	77.6/42.9
L901	6200007830	S.COI ELJFC 4R7K-F	B	84.5/48.0
R1	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	9.1/5.7
R2	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/19.2
R3	7030008280	S.RES ERJ2GEJ 271 X (270)	B	20.6/18.3
R7	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	34.0/5.7
R8	7030005220	S.RES ERJ2GEJ 223 X (22K)	T	31.1/5.7
R9	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	31.1/6.6
R10	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	33.0/11.5
R11	7030005070	S.RES ERJ2GEJ 683 X (68K)	T	32.1/11.5
R12	7030005110	S.RES ERJ2GEJ 224 X (220K)	T	32.8/5.7
R13	7030005530	S.RES ERJ2GEJ 100 X (10)	T	34.8/9.9
R14	7030004980	S.RES ERJ2GEJ 101 X (100)	T	35.4/7.5
R15	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	36.3/7.5
R16	7030010040	S.RES ERJ2GEJ-JPW	T	29.4/7.1
R19	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	15.2/11.4
R20	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/12.3
R21	7030007250	S.RES ERJ2GEJ 220 X (22)	B	32.3/10.9
R22	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	31.0/9.2
R23	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	33.7/10.4
R24	7030005590	S.RES ERJ2GEJ 680 X (68)	B	38.4/10.9
R25	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	40.2/10.9
R26	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	38.4/9.2
R27	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	15.2/12.3
R28	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	T	19.2/13.2
R31	7030005530	S.RES ERJ2GEJ 100 X (10)	B	42.2/14.9
R32	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	44.0/13.9
R33	7030004980	S.RES ERJ2GEJ 101 X (100)	B	44.6/13.1

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R35	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	46.4/14.0
R36	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.6/13.1
R37	7030004980	S.RES ERJ2GEJ 101 X (100)	B	49.6/14.0
R38	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.8/15.2
R41	7030005530	S.RES ERJ2GEJ 100 X (10)	T	53.0/17.7
R42	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	56.6/19.4
R44	7030005530	S.RES ERJ2GEJ 100 X (10)	B	56.5/21.3
R45	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	57.7/18.6
R47	7030004980	S.RES ERJ2GEJ 101 X (100)	T	63.4/17.7
R48	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	62.5/19.3
R51	7030008370	S.RES ERJ2GEJ 561 X (560)	B	56.5/22.9
R52	7030008370	S.RES ERJ2GEJ 561 X (560)	B	60.8/24.4
R53	7030012500	S.RES ERJ2RHD 1801X (1.80K)	T	55.7/23.7
R54	7030012510	S.RES ERJ2RHD 3901X (3.90K)	T	57.9/25.9
R55	7030012500	S.RES ERJ2RHD 1801X (1.80K)	T	61.8/23.7
R56	7030012510	S.RES ERJ2RHD 3901X (3.90K)	T	58.9/25.9
R57	7030009320	S.RES ERJ2GEJ 4R7 X (4.7)	T	60.7/25.9
R58	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	62.6/27.2
R59	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	62.6/25.6
R62	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	68.0/27.2
R65	7030005720	S.RES ERJ2GEJ 563 X (56K)	B	64.7/30.9
R66	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	64.7/30.4
R67	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	62.4/18.0
R68	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	63.1/30.9
R69	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	63.1/31.8
R70	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	63.6/28.8
R71	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	49.1/28.7
R72	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	51.1/27.9
R73	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	54.6/29.9
R74	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	52.8/29.9
R76	7030004990	S.RES ERJ2GEJ 221 X (220)	T	48.4/25.0
R77	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.9
R78	7030010040	S.RES ERJ2GEJ-JPW	T	46.7/23.8
R79	7030008400	S.RES ERJ2GEJ 182 X (1.8K)	T	46.7/25.0
R80	7410001130	S.ARR EXB28V102JX	T	41.9/27.8
R81	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	46.4/22.0
R82	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	40.1/18.8
R83	7030004970	S.RES ERJ2GEJ 470 X (47)	T	43.8/19.3
R84	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	40.1/23.7
R87	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	61.5/30.0
R88	7510001730	S.THE ERTJOEP 47J	T	58.8/9.9
R89	7030010080	S.RES ERJ2RHD 1003X (100K)	B	58.3/12.6
R101	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	28.3/32.7
R102	7030005170	S.RES ERJ2GEJ 474 X (470K)	B	29.2/32.7
R103	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	31.0/30.7
R104	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	17.4/25.8
R105	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	18.4/25.8
R106	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	22.8/26.9
R107	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	22.6/30.0
R108	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	22.8/28.7
R109	7030005530	S.RES ERJ2GEJ 100 X (10)	B	23.5/30.0
R110	7030008280	S.RES ERJ2GEJ 271 X (270)	B	23.5/25.6
R111	7030005110	S.RES ERJ2GEJ 224 X (220K)	B	24.4/30.0
R112	7030004970	S.RES ERJ2GEJ 470 X (47)	B	27.1/25.6
R113	7030008370	S.RES ERJ2GEJ 561 X (560)	B	29.2/27.5
R114	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	30.1/25.6
R115	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	31.0/25.6
R116	7030005080	S.RES ERJ2GEJ 823 X (82K)	B	34.7/28.8
R117	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	33.4/23.9
R118	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	36.4/23.9
R119	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	36.3/27.9
R120	7030005590	S.RES ERJ2GEJ 680 X (68)	B	39.2/23.9
R121	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.0/26.3
R122	7030004970	S.RES ERJ2GEJ 470 X (47)	B	41.9/23.9
R123	7030010040	S.RES ERJ2GEJ-JPW	T	71.2/30.6
R126	7030004980	S.RES ERJ2GEJ 101 X (100)	B	39.5/40.8
R127	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	37.9/40.8
R128	7030007280	S.RES ERJ2GEJ 331 X (330)	B	39.1/44.4
R129	7030005000	S.RES ERJ2GEJ 471 X (470)	B	37.4/22.3
R130	7030005530	S.RES ERJ2GEJ 100 X (10)	B	36.4/22.3
R131	7030005000	S.RES ERJ2GEJ 471 X (470)	B	35.4/22.3
R132	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	47.4/17.6
R134	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	91.6/14.8
R135	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	43.1/37.7
R136	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	T	42.9/38.9
R138	7030005000	S.RES ERJ2GEJ 471 X (470)	B	43.0/35.5
R139	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	48.3/35.5
R140	7030008410	S.RES ERJ2GEJ 392 X (3.9K)	B	46.5/34.6
R141	7030005070	S.RES ERJ2GEJ 683 X (68K)	B	46.5/33.7
R142	7030005310	S.RES ERJ2GEJ 124 X (120K)	B	46.5/31.9
R146	7030004970	S.RES ERJ2GEJ 470 X (47)	B	45.6/44.0
R147	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	47.1/42.2
R148	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.9/33.7
R149	7030007060	S.RES ERJ2GEJ 684X (680K)	T	41.5/32.3
R151	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	51.7/39.0
R152	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	53.9/35.1
R153	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	55.5/38.7
R154	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	57.8/36.9
R155	7030005600	S.RES ERJ2GEJ 273 X (27K)	B	58.8/39.8
R156	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	19.4/24.1
R157	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	31.0/23.9
R158	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	59.7/35.7
R161	7030008300	S.RES ERJ2GEJ 184 X (180K)	B	62.4/42.8
R162	7030004980	S.RES ERJ2GEJ 101 X (100)	B	64.0/42.8
R163	7030004980	S.RES ERJ2GEJ 101 X (100)	B	69.7/46.4
R164	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	67.3/41.0
R165	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	65.7/44.6
R166	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	65.7/43.7
R167	7030005290	S.RES ERJ2GEJ 682 X (6.8K)	B	65.7/42.8
R169	7030005030	S.RES ERJ2GEJ 152 X (1.5K)	B	64.0/41.0
R171	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	36.6/27.4
R172	7030005530	S.RES ERJ2GEJ 100 X (10)	B	39.2/31.1
R173	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	41.5/32.3
R174	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	38.3/38.8
R175	7030008370	S.RES ERJ2GEJ 561 X (560)	B	35.1/38.8

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R176	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	35.5/40.7
R177	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	40.1/40.7
R178	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	39.2/40.7
R181	7030007270	S.RES ERJ2GEJ 151 X (150)	T	35.5/29.4
R182	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	34.0/28.6
R183	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	37.8/41.1
R184	7030005530	S.RES ERJ2GEJ 100 X (10)	T	37.8/39.3
R185	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	68.8/32.4
R186	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	70.4/31.5
R187	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	67.6/36.3
R188	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	67.6/34.7
R189	7030004980	S.RES ERJ2GEJ 101 X (100)	T	68.9/36.8
R190	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	65.7/46.4
R243	7030005530	S.RES ERJ2GEJ 100 X (10)	B	82.1/21.9
R244	7030005160	S.RES ERJ2GEJ 105 X (1M)	B	83.0/21.9
R358	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/8.7
R359	7030010040	S.RES ERJ2GEJ-JPW	B	56.0/10.5
R360	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	56.0/9.6
R361	7030009290	S.RES ERJ2GEJ 562 X (5.6K)	B	24.8/41.7
R362	7030005060	S.RES ERJ2GEJ 333 X (33K)	B	51.6/7.5
R363	7030005000	S.RES ERJ2GEJ 471 X (470)	B	58.3/8.6
R364	7030005240	S.RES ERJ2GEJ 104 X (47K)	T	55.3/2.2
R365	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	26.2/38.9
R366	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	58.3/10.2
R367	7030005600	S.RES ERJ2GEJ 273 X (27K)	T	53.6/2.2
R368	7030005700	S.RES ERJ2GEJ 274 X (270K)	T	58.3/12.5
R369	7030005100	S.RES ERJ2GEJ 154 X (150K)	T	63.5/10.6
R370	7030005170	S.RES ERJ2GEJ 474 X (470K)	T	68.0/11.4
R371	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.3/14.1
R372	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.3/10.7
R373	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	75.4/11.6
R388	7030011120	S.RES ERJ2RHD 2702X (27.0K)	T	73.9/20.9
R389	7030012510	S.RES ERJ2RHD 3901X (3.90K)	T	71.0/20.2
R390	7030012520	S.RES ERJ2RHD 8201X (8.20K)	T	71.4/21.5
R393	7030005100	S.RES ERJ2GEJ 154 X (150K)	B	61.7/8.9
R394	7030005240	S.RES ERJ2GEJ 104 X (47K)	B	59.9/7.3
R395	7030008290	S.RES ERJ2GEJ 183 X (18K)	B	60.8/8.9
R396	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	60.8/7.3
R397	7030008310	S.RES ERJ2GEJ 564 X (560K)	B	59.7/5.7
R398	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	61.7/7.3
R405	7030011290	S.RES ERJ12YJ1R8U (1.8)	T	31.5/35.6
R406	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	12.6/45.7
R408	7030004980	S.RES ERJ2GEJ 101 X (100)	B	35.6/46.3
R412	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	15.9/39.5
R413	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	19.1/34.7
R414	7030005230	S.RES ERJ2GEJ 334 X (330K)	B	20.7/34.1
R416	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	21.5/36.0
R417	7030007570	S.RES ERJ2GEJ 122 X (1.2K)	B	21.3/37.2
R418	7030009280	S.RES ERJ2GEJ 391 X	B	19.8/37.9
R420	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	89.8/25.2
R421	7210003390	VAR F081165S-5 A10K L15FCX7 <SLVJ>		
R422	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	64.6/6.9
R423	7030012530	S.RES ERJ2RHD 3302X (33.0K)	T	6.2/36.5
R424	7030012540	S.RES ERJ2RHD 1502X (15.0K)	T	4.8/38.4
R426	7030009140	S.RES ERJ2GEJ 272 X (2.7K)	T	66.4/3.5
R427	7030007340	S.RES ERJ2GEJ 153 X (15K)	T	64.8/3.5
R428	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	64.8/5.5
R429	7030009150	S.RES ERJ2GEJ 824 X (820K)	T	66.4/5.5
R430	7030005160	S.RES ERJ2GEJ 105 X (1M)	T	63.2/4.5
R431	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	68.9/15.7
R432	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	68.9/17.3
R433	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	67.8/37.8
R434	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	68.7/37.8
R435	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	70.6/14.4
R436	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	72.2/13.9
R437	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	15.0/37.0
R439	7030005100	S.RES ERJ2GEJ 154 X (150K)	T	63.2/5.5
R440	7030009280	S.RES ERJ2GEJ 391 X	B	17.4/43.5
R441	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	19.1/33.8
R442	7030007280	S.RES ERJ2GEJ 331 X (330)	B	21.5/35.1
R444	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	90.4/12.8
R451	7030005060	S.RES ERJ2GEJ 333 X (33K)	T	24.6/30.5
R452	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/30.5
R453	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	21.2/29.6
R454	7030005310	S.RES ERJ2GEJ 124 X (120K)	T	23.0/30.5
R468	7030005010	S.RES ERJ2GEJ 681 X (680)	T	75.6/19.8
R469	7030008280	S.RES ERJ2GEJ 271 X (270)	T	77.5/20.4

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
R624	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	90.4/11.2
R625	7030005700	S.RES ERJ2GEJ 274 X (270K)	B	7.8/37.2
R626	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	6.2/37.2
R627	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/21.3
R628	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	88.2/17.0
R630	7030010040	S.RES ERJ2GEJ-JPW	B	63.3/14.9
R631	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	85.3/25.0
R632	7030005050	S.RES ERJ2GEJ 103 X (10K)	B	82.9/23.1
R633	7030005040	S.RES ERJ2GEJ 472 X (4.7K)	B	85.7/21.9
R634	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	82.7/11.4
R635	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.2/15.5
R636	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	88.0/14.3
R637	7030005050	S.RES ERJ2GEJ 103 X (10K)	T	87.3/19.7
R638	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.4/16.1
R639	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.6/15.7
R640	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	74.8/12.9
R641	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	77.5/22.2
R646	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	92.0/23.0
R647	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.2/22.2
R651	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	86.8/13.5
R652	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	91.1/22.2
R653	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	84.8/21.9
R657	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	84.9/13.1
R661	7410001130	S.ARR EXB28V102JX	B	90.9/12.3
R662	7410001130	S.ARR EXB28V102JX	B	90.9/14.8
R663	7410001130	S.ARR EXB28V102JX	B	88.4/22.3
R664	7410001150	S.ARR EXB28V471JX	B	80.2/22.3
R665	7410001130	S.ARR EXB28V102JX	B	77.2/22.3
R666	7410001130	S.ARR EXB28V102JX	B	75.3/10.9
R667	7410001130	S.ARR EXB28V102JX	B	79.4/6.4
R668	7410001130	S.ARR EXB28V102JX	B	82.4/6.4
R669	7410001130	S.ARR EXB28V102JX	B	85.2/6.4
R683	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	90.7/19.7
R688	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	T	81.0/13.1
R691	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	83.1/12.7
R692	7030005120	S.RES ERJ2GEJ 102 X (1K)	T	92.2/20.6
R693	7030007340	S.RES ERJ2GEJ 153 X (15K)	B	93.6/21.9
R694	7030012540	S.RES ERJ2RHD 1502X (15.0K)	B	91.9/20.5
R904	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	B	73.6/30.0
R905	7030007250	S.RES ERJ2GEJ 220 X (22)	T	75.2/33.2
R906	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	T	75.2/34.1
R907	7030005210	S.RES ERJ2GEJ 822 X (8.2K)	B	76.1/30.2
R908	7030007300	S.RES ERJ2GEJ 332 X (3.3K)	T	71.6/31.9
R909	7030004980	S.RES ERJ2GEJ 101 X (100)	B	76.1/29.3
R910	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	79.4/32.9
R911	7030010040	S.RES ERJ2GEJ-JPW	B	83.3/33.6
R912	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.2/29.5
R913	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.2/30.4
R914	7030010040	S.RES ERJ2GEJ-JPW	B	75.9/42.5
R915	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	84.8/34.2
R916	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	79.0/38.0
R917	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	85.6/32.1
R918	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	81.5/28.6
R919	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	80.0/29.8
R920	7030010040	S.RES ERJ2GEJ-JPW	B	82.4/28.6
R921	7030010040	S.RES ERJ2GEJ-JPW	T	79.8/31.7
R922	7030004980	S.RES ERJ2GEJ 101 X (100)	B	85.5/35.2
R923	7030005120	S.RES ERJ2GEJ 102 X (1K)	B	72.3/46.3
R925	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	75.5/49.3
R930	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	83.0/28.9
R931	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	82.1/28.2
R932	7030005240	S.RES ERJ2GEJ 473 X (47K)	T	82.1/29.8
R933	7030004970	S.RES ERJ2GEJ 470 X (47)	B	72.3/45.4
R934	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	76.9/48.6
R935	7030004970	S.RES ERJ2GEJ 470 X (47)	B	81.4/48.6
R936	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	79.6/48.6
R937	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	78.7/48.6
R938	7030004980	S.RES ERJ2GEJ 101 X (100)	B	79.9/43.8
R939	7030007290	S.RES ERJ2GEJ 222 X (2.2K)	B	79.9/42.0
R940	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	76.8/41.8
R941	7030005240	S.RES ERJ2GEJ 473 X (47K)	B	77.7/42.5
R945	7410001140	S.ARR EXB28V104JX	T	86.5/43.9
R946	7410001140	S.ARR EXB28V104JX	B	82.9/41.4
R947	7410001140	S.ARR EXB28V104JX	B	92.3/37.0
R948	7410001140	S.ARR EXB28V104JX	B	87.8/35.8
R949	7410001140	S.ARR EXB28V104JX	B	93.9/33.0
R950	7410001140	S.ARR EXB28V104JX	B	88.4/33.0
R951	7410001140	S.ARR EXB28V104JX	T	84.8/29.3
R952	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.1/36.8
R953	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	78.8/37.7
R956	7030010040	S.RES ERJ2GEJ-JPW	B	96.3/32.9
R957	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	94.7/30.9
R958	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	85.7/42.4
R961	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	90.9/30.9
R962	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	89.5/28.4
R963	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	95.4/32.9
R964	7410001140	S.ARR EXB28V104JX	B	85.9/39.4
R965	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	78.8/29.8
R966	7030005090	S.RES ERJ2GEJ 104 X (100K)	B	77.9/29.8
R968	7030005090	S.RES ERJ2GEJ 104 X (100K)	T	88.9/18.3
R969	7030005160	S.RES ERJ2GEJ 105 X (1M)	T	88.2/19.7
R970	7030010040	S.RES ERJ2GEJ-JPW	B	71.4/38.1
R971	7030010040	S.RES ERJ2GEJ-JPW	B	75.3/38.0
R972	7030010040	S.RES ERJ2GEJ-JPW	B	74.0/38.6

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C16	4030017390	S.CER C1005 CH 1H 180J-T	B	17.9/11.3
C20	4030017460	S.CER C1005 JB 1H 102K-T	B	20.4/11.4
C21	4030007070	S.CER C1608 CH 1H 330J-T	B	21.3/10.4
C23	4030007050	S.CER C1608 CH 1H 220J-T	B	22.7/10.4
C24	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/11.4
C25	4030017460	S.CER C1005 JB 1H 102K-T	T	19.8/10.5
C26	4030017460	S.CER C1005 JB 1H 102K-T	T	29.4/5.7
C27	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/5.8
C28	4030017460	S.CER C1005 JB 1H 102K-T	T	33.9/11.5
C29	4030016930	S.CER C1005 JB 1A 104K-T	T	31.2/11.5
C30	4030018890	S.CER C1005 JB 0J 224K-T	T	32.8/6.6
C31	4030016930	S.CER C1005 JB 1A 104K-T	T	34.8/11.5
C32	4030017460	S.CER C1005 JB 1H 102K-T	T	35.7/9.9
C33	4030017460	S.CER C1005 JB 1H 102K-T	T	37.2/7.5
C34	4030018860	S.CER C1005 JB 0J 105K-T	T	38.1/7.5
C35	4030017420	S.CER C1005 CH 1H 470J-T	B	37.5/9.2
C36	4030017460	S.CER C1005 JB 1H 102K-T	B	39.3/9.2
C37	4030017530	S.CER C1005 CH 1H 0R5B-T	B	13.6/12.3
C38	4030017460	S.CER C1005 JB 1H 102K-T	T	17.9/12.7
C40	4030017420	S.CER C1005 CH 1H 470J-T	T	21.4/13.2
C41	4030017460	S.CER C1005 JB 1H 102K-T	B	28.0/17.6
C43	4030017490	S.CER C1608 JB 1A 105K-T	B	27.8/20.3
C44	4030017460	S.CER C1005 JB 1H 102K-T	T	32.7/16.6
C45	4030017460	S.CER C1005 JB 1H 102K-T	T	21.4/12.3
C46	4030017510	S.CER C1005 CH 1H 680J-T	B	32.8/12.4
C48	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/9.2
C49	4030017420	S.CER C1005 CH 1H 470J-T	B	31.9/9.2
C51	4030017460	S.CER C1005 JB 1H 102K-T	B	23.4/22.7
C52	4030017460	S.CER C1005 JB 1H 102K-T	B	32.8/14.4
C53	4030017460	S.CER C1005 JB 1H 102K-T	B	37.5/10.9
C54	4030016790	S.CER C1005 JB 1E 103K-T	B	39.3/10.9
C55	4030017490	S.CER C1608 JB 1A 105K-T	B	33.5/16.6
C56	4030017430	S.CER C1005 CH 1H 101J-T	B	39.9/13.1
C57	4030017460	S.CER C1005 JB 1H 102K-T	B	40.5/14.9
C58	4030017420	S.CER C1005 CH 1H 470J-T	B	44.6/11.3
C59	4030017460	S.CER C1005 JB 1H 102K-T	B	46.6/10.4
C60	4030017460	S.CER C1005 JB 1H 102K-T	B	44.6/12.2
C63	4030017650	S.CER C1005 CH 1H 207J-T	B	46.4/14.9
C64	4030016790	S.CER C1005 JB 1E 103K-T	B	49.6/12.1
C65	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/14.0
C71	4030017620	S.CER C1005 CH 1H 100C-T	B	51.8/16.6
C72	4030017460	S.CER C1005 JB 1H 102K-T	B	51.2/17.8
C73	4030017460	S.CER C1005 JB 1H 102K-T	T	53.0/19.4
C74	4030017590	S.CER C1005 CH 1H 070C-T	T	58.0/18.9
C75	4030017460	S.CER C1005 JB 1H 102K-T	T	54.1/20.4
C76	4030017460	S.CER C1005 JB 1H 102K-T	B	58.6/18.6
C77	4030017460	S.CER C1005 JB 1H 102K-T	T	64.3/17.7
C78	4030017460	S.CER C1005 JB 1H 102K-T	T	58.9/18.9
C79	4030016930	S.CER C1005 JB 1A 104K-T	B	64.3/21.2
C80	4030017460	S.CER C1005 JB 1H 102K-T	B	64.3/23.4
C81	4030017360	S.CER C1005 CH 1H 030B-T	T	58.5/17.3
C83	4030017540	S.CER C1005 CH 1H R75B-T	T	58.9/21.2
C85	4030017460	S.CER C1005 JB 1H 102K-T	T	57.1/21.2
C86	4030017660	S.CER C1005 CH 1H 330J-T	T	57.0/25.9
C87	4030017660	S.CER C1005 CH 1H 330J-T	T	58.0/21.2
C88	4030017660	S.CER C1005 CH 1H 330J-T	T	56.1/25.9
C89	4030017660	S.CER C1005 CH 1H 330J-T	T	57.9/27.5
C90	4030017460	S.CER C1005 JB 1H 102K-T	B	61.7/28.8
C93	4030017420	S.CER C1005 CH 1H 470J-T	T	53.2/28.5
C94	4030017610	S.CER C1005 CH 1H 090C-T	T	53.2/27.5
C101	4030017530	S.CER C1005 CH 1H 0R5B-T	T	59.8/21.2
C102	4030016930	S.CER C1005 JB 1A 104K-T	T	56.2/21.8
C103	4030017460	S.CER C1005 JB 1H 102K-T	T	61.8/21.8
C104	4030017390	S.CER C1005 CH 1H 180J-T	T	59.8/25.9
C105	4030017660	S.CER C1005 CH 1H 330J-T	T	60.7/21.2
C106	4030017510	S.CER C1005 CH 1H 680J-T	T	61.6/25.9
C107	4030017660	S.CER C1005 CH 1H 330J-T	T	61.1/27.1
C108	4030017460	S.CER C1005 JB 1H 102K-T	B	60.8/25.6
C109	4550008090	S.TAN TCTU0J105K8R	B	65.6/16.4
C111	4030017340	S.CER C1005 CH 1H 010B-T	T	61.1/29.2
C112	4030017440	S.CER C1005 CH 1H 221J-T	T	62.7/25.3
C113	4030017360	S.CER C1005 CH 1H 030B-T	T	64.7/23.5
C114	4030017360	S.CER C1005 CH 1H 030B-T	T	63.8/23.1
C115	4030017610	S.CER C1005 CH 1H 090C-T	T	64.7/25.3
C116	4030018860	S.CER C1005 JB 0J 105K-T	B	63.1/30.0
C117	4030018820	S.CER C1005 JB 1H 561K-T	B	61.5/30.9
C118	4030017420	S.CER C1005 CH 1H 470J-T	B	66.3/30.0
C119	4030016930	S.CER C1005 JB 1A 104K-T	B	64.1/24.9
C120	4030017460	S.CER C1005 JB 1H 102K-T	B	64.7/31.8
C121	4030019560	S.CER GRM21BB31C106KE15L	B	61.1/19.7
C122	4030016790	S.CER C1005 JB 1E 103K-T	B	65.0/16.4
C123	4030017460	S.CER C1005 JB 1H 102K-T	B	47.0/29.0
C124	4030017460	S.CER C1005 JB 1H 102K-T	B	53.7/29.9
C130	4030017420	S.CER C1005 CH 1H 470J-T	B	59.9/21.6
C132	4550000560	S.TAN TEESVA 1V 334M8R	T	48.3/21.4
C134	4550003250	S.TAN TEESVA 1V 474M8R	T	46.7/29.8
C141	4030017620	S.CER C1005 CH 1H 100C-T	B	51.4/19.5
C144	4030017430	S.CER C1005 CH 1H 101J-T	T	43.3

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C168	4030017630	S.CER C1005 CH 1H 120J-T	B	48.3/22.2
C169	4030017620	S.CER C1005 CH 1H 100C-T	B	48.8/21.0
C171	4030018120	S.CER C1005 CH 1H 110J-T	B	16.2/18.5
C172	4030017640	S.CER C1005 CH 1H 150J-T	B	13.9/22.2
C173	4030017460	S.CER C1005 JB 1H 102K-T	B	13.4/24.8
C174	4030017580	S.CER C1005 CH 1H 060C-T	B	12.4/24.8
C175	4030017580	S.CER C1005 CH 1H 060C-T	B	13.4/26.5
C176	4030017430	S.CER C1005 CH 1H 101J-T	B	16.4/25.8
C178	4030017550	S.CER C1005 CH 1H 1R5B-T	B	17.9/29.1
C179	4030017370	S.CER C1005 CH 1H 3R5B-T	B	19.4/27.7
C180	4030017430	S.CER C1005 CH 1H 101J-T	B	19.4/25.8
C181	4030017370	S.CER C1005 CH 1H 3R5B-T	B	22.8/27.8
C182	4030017460	S.CER C1005 JB 1H 102K-T	T	19.0/24.8
C183	4030017460	S.CER C1005 JB 1H 102K-T	B	18.4/24.1
C184	4030016930	S.CER C1005 JB 1A 104K-T	B	17.4/24.1
C186	4030016930	S.CER C1005 JB 1A 104K-T	B	21.7/30.0
C188	4030016930	S.CER C1005 JB 1A 104K-T	B	25.3/30.0
C189	4030017460	S.CER C1005 JB 1H 102K-T	B	27.1/23.9
C191	4030016790	S.CER C1005 JB 1E 103K-T	B	28.7/28.7
C192	4030017460	S.CER C1005 JB 1H 102K-T	B	26.2/25.6
C193	4030017460	S.CER C1005 JB 1H 102K-T	B	25.3/25.6
C195	4030017570	S.CER C1005 CH 1H 040B-T	B	28.2/27.5
C196	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/25.6
C197	4030017550	S.CER C1005 CH 1H 1R5B-T	B	31.0/29.8
C198	4030017460	S.CER C1005 JB 1H 102K-T	B	32.3/25.8
C199	4030017380	S.CER C1005 CH 1H 050B-T	B	34.4/26.6
C200	4030017580	S.CER C1005 CH 1H 060C-T	B	34.7/27.9
C201	4030017460	S.CER C1005 JB 1H 102K-T	T	31.8/23.6
C202	4030017460	S.CER C1005 JB 1H 102K-T	B	29.2/23.9
C203	4030016930	S.CER C1005 JB 1A 104K-T	B	30.1/23.9
C206	4030017620	S.CER C1005 CH 1H 100C-T	B	47.4/16.6
C210	4030017630	S.CER C1005 CH 1H 120J-T	B	35.4/23.9
C211	4030017460	S.CER C1005 JB 1H 102K-T	B	34.4/22.3
C214	4030017460	S.CER C1005 JB 1H 102K-T	B	37.4/23.9
C215	4030017390	S.CER C1005 CH 1H 180J-T	B	41.9/26.3
C216	4030017460	S.CER C1005 JB 1H 102K-T	B	41.0/23.9
C217	4030016790	S.CER C1005 JB 1E 103K-T	B	40.1/23.9
C218	4030016790	S.CER C1005 JB 1E 103K-T	B	37.5/28.5
C223	4030017460	S.CER C1005 JB 1H 102K-T	B	41.9/22.3
C224	4030017460	S.CER C1005 JB 1H 102K-T	B	45.7/17.6
C225	4030017460	S.CER C1005 JB 1H 102K-T	T	39.5/38.8
C226	4030016790	S.CER C1005 JB 1E 103K-T	B	37.3/44.4
C227	4030016790	S.CER C1005 JB 1E 103K-T	B	36.3/40.8
C231	4030017430	S.CER C1005 CH 1H 101J-T	B	40.6/42.6
C232	4030017660	S.CER C1005 CH 1H 330J-T	T	42.0/38.9
C233	4030017460	S.CER C1005 JB 1H 102K-T	B	41.1/39.0
C235	4030019560	S.CER GRM21BB31C106KE15L	B	44.5/42.6
C236	4030017460	S.CER C1005 JB 1H 102K-T	B	47.1/43.1
C238	4030017460	S.CER C1005 JB 1H 102K-T	B	41.1/40.1
C239	4030017720	S.CER C1005 JB 1H 331K-T	T	43.1/40.1
C240	4030017460	S.CER C1005 JB 1H 102K-T	B	44.7/35.5
C241	4030017420	S.CER C1005 CH 1H 470J-T	B	46.5/32.8
C242	4030017710	S.CER C1005 CH 1H 181J-T	B	48.3/34.6
C243	4030017710	S.CER C1005 CH 1H 181J-T	B	46.5/35.5
C244	4030016930	S.CER C1005 JB 1A 104K-T	B	50.2/37.0
C246	4030019460	S.CER C1608 JB 0J 106M-T	T	68.8/30.7
C247	4030018140	S.CER C1005 JB 1H 391K-T	T	70.4/32.4
C248	4030016930	S.CER C1005 JB 1A 104K-T	T	68.9/37.7
C251	4030017360	S.CER C1005 CH 1H 030B-T	T	44.1/36.8
C252	4030017500	S.CER C1005 CH 1H 560J-T	T	42.5/36.8
C253	4030017580	S.CER C1005 CH 1H 060C-T	T	41.4/35.9
C254	4030017500	S.CER C1005 CH 1H 560J-T	T	42.6/34.6
C255	4030016790	S.CER C1005 JB 1E 103K-T	T	45.1/32.1
C256	4030017620	S.CER C1005 CH 1H 100C-T	T	39.2/23.7
C257	4030016790	S.CER C1005 JB 1H 103K-T	T	40.9/34.6
C261	4030016790	S.CER C1005 JB 1E 103K-T	B	50.5/38.6
C262	4030016790	S.CER C1005 JB 1E 103K-T	B	50.2/40.7
C263	4030016790	S.CER C1005 JB 1E 103K-T	B	57.1/41.5
C264	4030016790	S.CER C1005 JB 1E 103K-T	B	53.9/36.0
C265	4030016790	S.CER C1005 JB 1E 103K-T	B	58.7/36.9
C266	4030016930	S.CER C1005 JB 1A 104K-T	B	56.3/37.5
C267	4030016930	S.CER C1005 JB 1A 104K-T	B	58.1/35.7
C271	4030016930	S.CER C1005 JB 1A 104K-T	B	61.5/43.8
C272	4030016930	S.CER C1005 JB 1A 104K-T	B	62.4/41.9
C273	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/45.5
C274	4030016930	S.CER C1005 JB 1A 104K-T	B	68.9/42.0
C275	4030017040	S.CER C1005 JB 1A 333K-T	B	68.1/46.4
C276	4030017650	S.CER C1005 CH 1H 270J-T	B	67.3/42.0
C277	4030016930	S.CER C1005 JB 1A 104K-T	B	65.7/41.0
C282	4030016790	S.CER C1005 JB 1E 103K-T	B	40.8/31.1
C283	4030017590	S.CER C1005 CH 1H 070C-T	B	39.0/35.3
C284	4030016790	S.CER C1005 JB 1E 103K-T	B	36.7/38.8
C286	4030016790	S.CER C1005 JB 1E 103K-T	T	34.9/28.4
C287	4030017570	S.CER C1005 CH 1H 040B-T	T	37.1/29.6
C288	4030017600	S.CER C1005 CH 1H 080C-T	T	39.9/32.3
C290	4030016790	S.CER C1005 JB 1E 103K-T	T	37.8/40.2
C291	4030016930	S.CER C1005 JB 1A 104K-T	B	42.4/32.3
C292	4030016930	S.CER C1005 JB 1A 104K-T	T	38.3/44.1
C293	4030017460	S.CER C1005 JB 1H 102K-T	T	40.1/42.4
C311	4030018860	S.CER C1005 JB 0J 105K-T	T	24.6/31.4
C312	4030017710	S.CER C1005 CH 1H 181J-T	T	23.0/31.4
C313	4030016930	S.CER C1005 JB 1A 104K-T	T	21.2/28.0
C318	4030016790	S.CER C1005 JB 1E 103K-T	B	73.5/21.0
C319	4030016930	S.CER C1005 JB 1A 104K-T	B	75.4/23.9
C322	4030018860	S.CER C1005 JB 0J 105K-T	B	71.5/6.2
C323	4030016930	S.CER C1005 JB 1A 104K-T	B	68.4/9.9
C324	4030017740	S.CER C1005 JB 1H 821K-T	B	68.4/6.7
C325	4030016790	S.CER C1005 JB 1E 103K-T	T	80.2/9.6
C327	4030017900	S.CER C1005 JB 1E 123K-T	B	60.9/14.3
C328	4030020010	S.CER C1005 CH 1H 271J-T	B	63.3/12.6
C334	4030017460	S.CER C1005 JB 1H 102K-T	B	15.0/46.6
C335	4030017460	S.CER C1005 JB 1H 102K-T	B	24.6/38.2
C336	4030018860	S.CER C1005 JB 0J 105K-T	B	57.3/8.6
C337	4030017460	S.CER C1005 JB 1H 102K-T	B	52.5/7.5
C338	4030017460	S.CER C1005 JB 1H 102K-T	B	50.7/7.5

[MAIN UNIT]

REF NO.	PARTS NO.		DESCRIPTION	M.	H/V LOCATION
C339	4030017460	S.CER	C1005 JB 1H 102K-T	B	53.4/7.5
C340	4030016930	S.CER	C1005 JB 1A 104K-T	B	57.3/10.2
C342	4030017460	S.CER	C1005 JB 1H 102K-T	B	47.1/6.6
C343	4030019560	S.CER	GRM21BB31C106KE15L	B	57.6/6.9
C344	4030016930	S.CER	C1005 JB 1A 104K-T	B	55.1/2.2
C361	4030016930	S.CER	C1005 JB 1A 104K-T	B	69.0/14.4
C364	4030018100	S.CER	C1005 JB 1H 681K-T	B	64.5/3.9
C376	4030017460	S.CER	C1005 JB 1H 102K-T	T	73.0/20.9
C377	4550007320	S.TAN	F930J226MAABMA	T	72.6/17.6
C378	4030017460	S.CER	C1005 JB 1H 102K-T	T	73.0/22.5
C380	4030017510	S.CER	C1005 CH 1H 680J-T	T	68.0/15.0
C381	4030016930	S.CER	C1005 JB 1A 104K-T	T	68.0/4.5
C382	4030016930	S.CER	C1005 JB 1A 104K-T	T	66.4/4.5
C383	4030018860	S.CER	C1005 JB 0J 105K-T	T	64.8/4.5
C384	4030018860	S.CER	C1005 JB 0J 105K-T	T	63.2/7.0
C385	4030016930	S.CER	C1005 JB 1A 104K-T	T	63.2/3.5
C386	4030016930	S.CER	C1005 JB 1A 104K-T	T	64.4/12.2
C388	4030017460	S.CER	C1005 JB 1H 102K-T	B	20.9/3.5
C389	4030017460	S.CER	C1005 JB 1H 102K-T	B	43.9/2.5
C390	4030017460	S.CER	C1005 JB 1H 102K-T	B	53.3/2.6
C391	4030017420	S.CER	C1005 CH 1H 470J-T	B	37.3/46.3
C392	4030017420	S.CER	C1005 CH 1H 470J-T	B	29.1/43.9
C393	4520000020	S.NIO	NOJC227M006RWJV	B	19.8/40.5
C394	4030017460	S.CER	C1005 JB 1H 102K-T	B	28.2/43.9
C395	4520000020	S.NIO	NOJC227M006RWJV	T	21.2/37.1
C396	4030017460	S.CER	C1005 JB 1H 102K-T	T	27.1/47.4
C397	4030017460	S.CER	C1005 JB 1H 102K-T	T	25.2/37.4
C398	4030017460	S.CER	C1005 JB 1H 102K-T	B	12.2/32.0
C399	4030016930	S.CER	C1005 JB 1A 104K-T	B	22.2/37.2
C400	4550006250	S.TAN	TEESVA 1A 106M8R	T	12.9/40.8
C401	4030016930	S.CER	C1005 JB 1A 104K-T	B	12.2/37.6
C403	4030018890	S.CER	C1005 JB 0J 224K-T	B	15.0/39.5
C404	4030016930	S.CER	C1005 JB 1A 104K-T	B	12.2/38.5
C405	4030018860	S.CER	C1005 JB 0J 105K-T	B	19.3/33.7
C406	4030017460	S.CER	C1005 JB 1H 102K-T	T	20.7/34.7
C408	4030016930	S.CER	C1005 JB 1A 104K-T	T	4.8/37.5
C412	4030017460	S.CER	C1005 JB 1H 102K-T	T	6.5/42.8
C413	4030017460	S.CER	C1005 JB 1H 102K-T	B	7.7/31.9
C423	4030016790	S.CER	C1005 JB 1E 103K-T	B	67.2/18.4
C426	4030016790	S.CER	C1005 JB 1E 103K-T	B	67.8/39.4
C427	4030016930	S.CER	C1005 JB 1A 104K-T	T	73.7/15.3
C428	4030017460	S.CER	C1005 JB 1H 102K-T	T	16.4/32.2
C429	4030016790	S.CER	C1005 JB 1E 103K-T	B	72.2/14.8
C430	4030016930	S.CER	C1005 JB 1A 104K-T	T	63.4/9.0
C431	4510009870	S.ELE	10 CE 100 LD	T	14.7/27.1
C432	4030017460	S.CER	C1005 JB 1H 102K-T	T	92.7/6.4
C433	4030017460	S.CER	C1005 JB 1H 102K-T	T	17.3/32.2
C434	4030017460	S.CER	C1005 JB 1H 102K-T	T	14.3/32.6
C435	4550007320	S.TAN	F930J226MAABMA	T	19.4/30.8
C437	4030017460	S.CER	C1005 JB 1H 102K-T	T	14.3/31.7
C448	4030019490	S.CER	C2012 JB 1A 106K-T	B	28.3/46.0
C451	4030016930	S.CER	C1005 JB 1A 104K-T	B	86.6/21.9
C452	4030016930	S.CER	C1005 JB 1A 104K-T	B	86.6/24.5
C453	4030017640	S.CER	C1005 CH 1H 150J-T	T	83.9/22.5
C454	4030017580	S.CER	C1005 CH 1H 060C-T	T	85.2/21.3
C455	4030017640	S.CER	C1005 CH 1H 150J-T	B	83.9/21.9
C456	4030016930	S.CER	C1005 JB 1A 104K-T	T	82.7/10.5
C457	4030017030	S.CER	C1005 JB 1A 273K-T	T	86.0/9.3
C458	4030018900	S.CER	C1005 JB 0J 474K-T	T	84.2/19.8
C461	4030019990	S.CER	C1005 JB 1C 104K-T	B	96.9/12.4
C462	4030019510	S.CER	GRM32EB31E226KE15L	B	96.3/9.1
C463	4030019990	S.CER	C1005 JB 1C 104K-T	T	93.6/8.0
C464	4030019510	S.CER	GRM32EB31E226KE15L	T	90.7/7.0
C465	4050000240	S.FEE	NFM18PC104R1C3D	T	88.5/9.0
C466	4030018860	S.CER	C1005 JB 0J 105K-T	T	88.6/10.7
C467	4030018860	S.CER	C1005 JB 0J 105K-T	T	89.5/12.8
C482	4030017920	S.CER	C1005 JB 1A 683K-T	T	72.0/4.6
C483	4030018860	S.CER	C1005 JB 0J 105K-T	T	70.3/3.7
C484	4030018860	S.CER	C1005 JB 0J 105K-T	T	72.0/5.5
C485	4030018860	S.CER	C1005 JB 0J 105K-T	B	72.3/7.1
C486	4030016930	S.CER	C1005 JB 1A 104K-T	T	70.7/14.5
C487	4030018860	S.CER	C1005 JB 0J 105K-T	T	72.5/14.5
C488	4030018860	S.CER	C1005 JB 0J 105K-T	T	73.7/14.4
C489	4030018860	S.CER	C1005 JB 0J 105K-T	B	65.5/13.0
C490	4030017920	S.CER	C1005 JB 1A 683K-T	T	73.7/3.7
C491	4030016790	S.CER	C1005 JB 1E 103K-T	T	73.7/4.6
C492	4030017430	S.CER	C1005 CH 1H 101J-T	B	70.2/8.3
C493	4030018100	S.CER	C1005 JB 1H 681K-T	B	72.2/9.8
C494	4030016790	S.CER	C1005 JB 1E 103K-T	B	69.3/8.3
C501	4030016930	S.CER	C1005 JB 1A 104K-T	B	74.4/16.1
C502	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.5/17.9
C503	4030016930	S.CER	C1005 JB 1A 104K-T	B	74.4/15.2
C504	4030016930	S.CER	C1005 JB 1A 104K-T	B	74.4/17.0
C505	4030016930	S.CER	C1005 JB 1A 104K-T	B	74.4/14.3
C506	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.6/19.3
C507	4030018860	S.CER	C1005 JB 0J 105K-T	T	83.3/8.9
C508	4030017460	S.CER	C1005 JB 1H 102K-T	T	84.2/8.9
C509	4030018860	S.CER	C1005 JB 0J 105K-T	T	90.2/18.6
C510	4030017460	S.CER	C1005 JB 1H 102K-T	T	88.6/11.6
C511	4030018860	S.CER	C1005 JB 0J 105K-T	T	91.4/21.7
C512	4030018860	S.CER	C1005 JB 0J 105K-T	B	75.7/12.9
C513	4030016930	S.CER	C1005 JB 1A 104K-T	T	86.4/19.7
C514	4030018860	S.CER	C1005 JB 0J 105K-T	T	76.7/18.6
C515	4030017460	S.CER	C1005 JB 1H 102K-T	T	91.4/22.6
C900	4030016930	S.CER	C1005 JB 1A 104K-T	T	75.5/35.6
C901	4030018910	S.CER	C1608 JB 0J 475K-T	T	76.0/36.7
C903	4050000240	S.FEE	NFM18PC104R1C3D	B	72.3/39.3
C904	4050000240	S.FEE	NFM18PC104R1C3D	B	73.1/41.2
C905	4050000240	S.FEE	NFM18PC104R1C3D	B	72.3/36.9
C907	4030017460	S.CER	C1005 JB 1H 102K-T	T	75.2/32.3
C908	4030018910	S.CER	C1608 JB 0J 475K-T	T	77.5/34.4
C909	4030016930	S.CER	C1005 JB 1A 104K-T	T	78.1/35.5
C910	4030016930	S.CER	C1005 JB 1A 104K-T	B	75.9/40.9
C911	4550007730	S.TAN	TEESVJ 0J 106M8R	B	74.8/41.1
C912	4030018910	S.CER	C1608 JB 0J 475K-T	T	78.8/39.4

[MAIN UNIT]

REF NO.	PARTS NO.	DESCRIPTION	M.	H/V LOCATION
C913	4030016930	S.CER C1005 JB 1A 104K-T	T	80.0/40.0
C915	4030016930	S.CER C1005 JB 1A 104K-T	B	70.6/35.9
C916	4550007730	S.TAN TEESVJ 0J 106M8R	B	71.8/33.7
C917	4030016930	S.CER C1005 JB 1A 104K-T	B	70.6/35.0
C918	4030016790	S.CER C1005 JB 1E 103K-T	B	71.2/41.4
C919	4030018860	S.CER C1005 JB 0J 105K-T	T	81.1/44.5
C920	4030016790	S.CER C1005 JB 1E 103K-T	T	81.1/43.6
C921	4030018910	S.CER C1608 JB 0J 475K-T	B	80.3/39.6
C922	4030018910	S.CER C1608 JB 0J 475K-T	B	78.4/40.2
C923	4030016790	S.CER C1005 JB 1E 103K-T	B	90.0/30.9
C924	4030016790	S.CER C1005 JB 1E 103K-T	B	73.6/30.9
C925	4030017420	S.CER C1005 CH 1H 470J-T	B	85.2/28.6
C926	4030017460	S.CER C1005 JB 1H 102K-T	B	83.7/29.8
C927	4030019460	S.CER C1608 JB 0J 106M-T	B	73.7/32.6
C928	4030018860	S.CER C1005 JB 0J 105K-T	B	74.9/29.8
C930	4030018860	S.CER C1005 JB 0J 105K-T	B	83.3/31.9
C931	4030018860	S.CER C1005 JB 0J 105K-T	B	86.7/41.3
C932	4030016930	S.CER C1005 JB 1A 104K-T	B	75.4/31.7
C933	4030016930	S.CER C1005 JB 1A 104K-T	B	71.8/35.4
C934	4030018910	S.CER C1608 JB 0J 475K-T	B	70.7/32.2
C935	4030016790	S.CER C1005 JB 1E 103K-T	B	90.2/38.4
C936	4030018860	S.CER C1005 JB 0J 105K-T	B	89.8/37.5
C937	4030016790	S.CER C1005 JB 1E 103K-T	B	88.0/30.4
C938	4030017420	S.CER C1005 CH 1H 470J-T	B	80.6/28.6
C939	4030017420	S.CER C1005 CH 1H 470J-T	B	80.0/30.7
C940	4030018910	S.CER C1608 JB 0J 475K-T	B	83.2/43.3
C941	4030016930	S.CER C1005 JB 1A 104K-T	T	83.3/43.6
C942	4030016930	S.CER C1005 JB 1A 104K-T	B	92.3/41.2
C943	4030016790	S.CER C1005 JB 1E 103K-T	B	87.7/41.3
C944	4030016930	S.CER C1005 JB 1A 104K-T	B	76.8/43.4
C945	4030016930	S.CER C1005 JB 1A 104K-T	B	72.3/44.5
C946	4030016930	S.CER C1005 JB 1A 104K-T	B	75.5/48.4
C947	4030016930	S.CER C1005 JB 1A 104K-T	B	78.5/27.0
C948	4030016930	S.CER C1005 JB 1A 104K-T	B	74.1/43.9
C949	4030017420	S.CER C1005 CH 1H 470J-T	B	72.3/43.6
C950	4030017620	S.CER C1005 CH 1H 100C-T	B	77.8/48.6
C951	4030016930	S.CER C1005 JB 1A 104K-T	B	78.0/46.9
C952	4030017400	S.CER C1005 CH 1H 220J-T	B	83.1/27.1
C953	4030017460	S.CER C1005 JB 1H 102K-T	B	80.5/48.6
C954	4030016790	S.CER C1005 JB 1E 103K-T	B	82.3/48.6
C955	4030016930	S.CER C1005 JB 1A 104K-T	B	78.3/43.8
C956	4030017380	S.CER C1005 CH 1H 050B-T	B	79.9/42.9
C957	4030016930	S.CER C1005 JB 1A 104K-T	B	78.6/42.5
C958	4030016930	S.CER C1005 JB 1A 104K-T	T	68.9/38.6
C959	4030017620	S.CER C1005 CH 1H 100C-T	B	78.3/41.3
J51	6450000131	CON HSJ1102-018540		
J52	6450002250	CON HSJ1456-010320		
J53	6510021901	S.CON BM02B-ASRS-TF(LF)(SN)	T	27.2/34.5
F51	5210000970	S.FUS ERBSE3R00U	T	10.7/37.6
DS51	5040003520	S.LED LNJ115W8PRA	T	2.0/37.9
MC51	7700002920	MIC EM9745P-38-G-01 <HOR>		
S51	2260001900	SWI SW-149 (SKHLLD)		
S52	2260002800	S.SWI SW-167 (SKQTLAE010)	B	39.2/1.9
S53	2260002800	S.SWI SW-167 (SKQTLAE010)	B	48.7/1.9
S54	2250000670	ENC TP70TF5169-15.9F-3285		
EP2	6910018460	S.BEA MMZ1005Y102C-T	B	32.8/15.5
EP3	6910018460	S.BEA MMZ1005Y102C-T	B	63.4/21.2
EP4	6910018460	S.BEA MMZ1005Y102C-T	T	45.1/28.7
EP5	6910018460	S.BEA MMZ1005Y102C-T	T	41.0/10.9
EP6	6910014730	S.BEA MPZ2012S331A-T	B	25.2/21.4
EP7	6910021240	S.BEA MMZ1005A152ET	B	61.7/25.6
EP8	6910021240	S.BEA MMZ1005A152ET	B	62.6/28.8
EP51	6910018460	S.BEA MMZ1005Y102C-T	B	19.1/46.2
EP52	6910021240	S.BEA MMZ1005A152ET	B	95.9/13.0
EP53	6910021240	S.BEA MMZ1005A152ET	B	95.9/15.6
EP900	6910016330	S.BEA MMZ1005S 601CT-S	B	71.2/42.3
EP902	6910016330	S.BEA MMZ1005S 601CT-S	B	70.1/33.7
EP903	6910016330	S.BEA MMZ1005S 601CT-S	T	83.2/49.7
EP904	6910016330	S.BEA MMZ1005S 601CT-S	T	94.4/47.0
EP905	6910016330	S.BEA MMZ1005S 601CT-S	B	84.5/49.8
EP906	6910016330	S.BEA MMZ1005S 601CT-S	B	93.2/46.9

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)
S.=Surface mount

SECTION 7

MECHANICAL PARTS

[CHASSIS PARTS]


REF NO.	ORDER NO.	DESCRIPTION	QTY.
J1	6910021491	ANT CONNECTOR 106-1 <SSC>	1
SP1	2510001560	045P01202-02	1
W1	8900009640	OPC-963	1
MP1	8010022040	3286 CHASSIS	1
MP2	8210026490	3328 FRONT PANEL ASSEMBLY	1
MP10	8930082160	3285 NAME SHEET (A)	1
MP11	8930081140	3328 LENS	1
MP12	8930080620	O-RING (CF) <KRI>	1
MP13	8930080630	3285 SP PLATE Y1174	1
MP14	8930042350	1922 MIC SHEET	1
MP15	8930080410	3285 MIC SPONGE	1
MP16	8930079900	3285 TERMINAL HOLDER	1
MP17	8930080100	3285 PLUS TERMINAL	1
MP18	8930080400	3285 MINUS TERMINAL	1
MP19	8930069710	THERMAL SHEET (BC) TC200HS-1.4 (7.9X7)	1
MP20	8830003390	VR NUT (AB)	2
MP21	8930080091	3285 SIDE PLATE-1 Y1173A	1
MP22	8930080150	3285 SIDE SEAL <KRI>	1
MP23	8930080140	3285 TOP SEAL <KRI>	1
MP24	8830003440	3285 ANT NUT	1
MP25	8610014180	KNOB N-389	1
MP27	8610014190	KNOB N-390	1
MP31	8810008761	PHBT M2 X 8 NI-ZC3	2
MP32	8810009511	PHBT M2 X 4 NI-ZC3 (3.6-4.0)	9
MP33	8810009511	PHBT M2 X 4 NI-ZC3 (3.6-4.0)	1
MP34	8810009181	BT M2 X 5 NI-ZC3	2
MP35	8930066240	SPONGE (IM)	1

[MAIN UNIT]

REF NO.	ORDER NO.	DESCRIPTION	QTY.
J51	6450000131	HSJ1102-018540	1
J52	6450002250	HSJ1456-010320	1
J53*	6510021901	BM02B-ASRS-TF (LF) (SN)	1
F51*	5210000970	ERBSE3R00U	1
MC51	7700002920	EM9745P-38-G-01 <HOR>	1
S51	2260001900	SW-149 (SKHLLD)	1
S52*	2260002800	SW-167 (SKQTLAE010)	1
S53*	2260002800	SW-167 (SKQTLAE010)	1
S54	2250000670	TP70TF5169-15.9F-3285	1
MP2	8510016461	2775 VCO COVER-1	1
MP3*	8510016471	2775 VCO CASE-1	1
MP4*	6910014760	OG-503040	1
MP5*	6910014760	OG-503040	1
MP8*	8510020110	3328 SHIELD PLATE Y1222	1
MP9*	8510019920	3328 DSP CASE Y1212	1
MP10*	8510019930	3328 DSP COVER Y1213	1
MP11*	6910014760	OG-503040	1
MP12	8930082300	DOUBLE SIDE TAPE (BK)	1
MP13*	8930082310	3328 K-PLATE	1


[ACCESSORIES]


REF NO.	ORDER NO.	DESCRIPTION	QTY.
EP1	(Optional)	FA-SC55V-2	1
EP2	(Optional)	BP-265	1
EP3	(Optional)	BC-193	1
EP4	(Optional)	BC-123SA [USA-01]	1
	(Optional)	BC-123SA [EXP-01]	1
	(Optional)	BC-123SE [EXP-02]	1
	(Optional)	BC-123SV [AUS-01]	1
	(Optional)	BC-123SE [RUS-01]	1
MP1	(Optional)	MB-124	1
MP2	8210025840	3285 JACK PANEL	1
MP3	8810004861	PH M2 X 6 ZK3	2

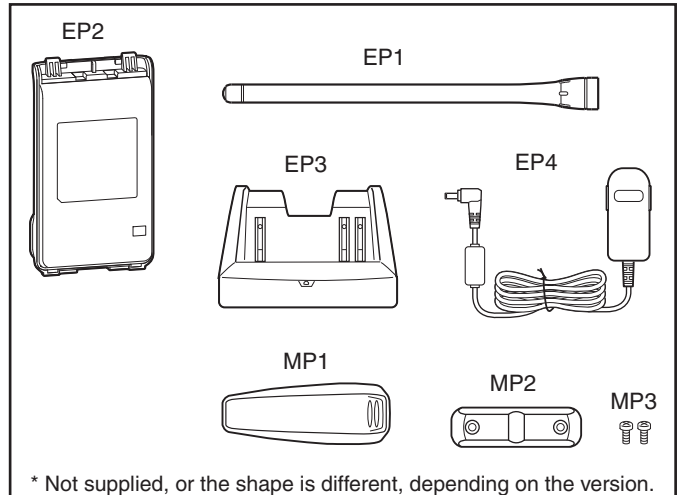


*: Refer to "BOARD LAYOUTS" for the location.

Screw abbreviations A, B0, BT: Self-tapping PH: Pan head ZK: Black NI-ZU: Nickel-Zinc SUS: Stainless

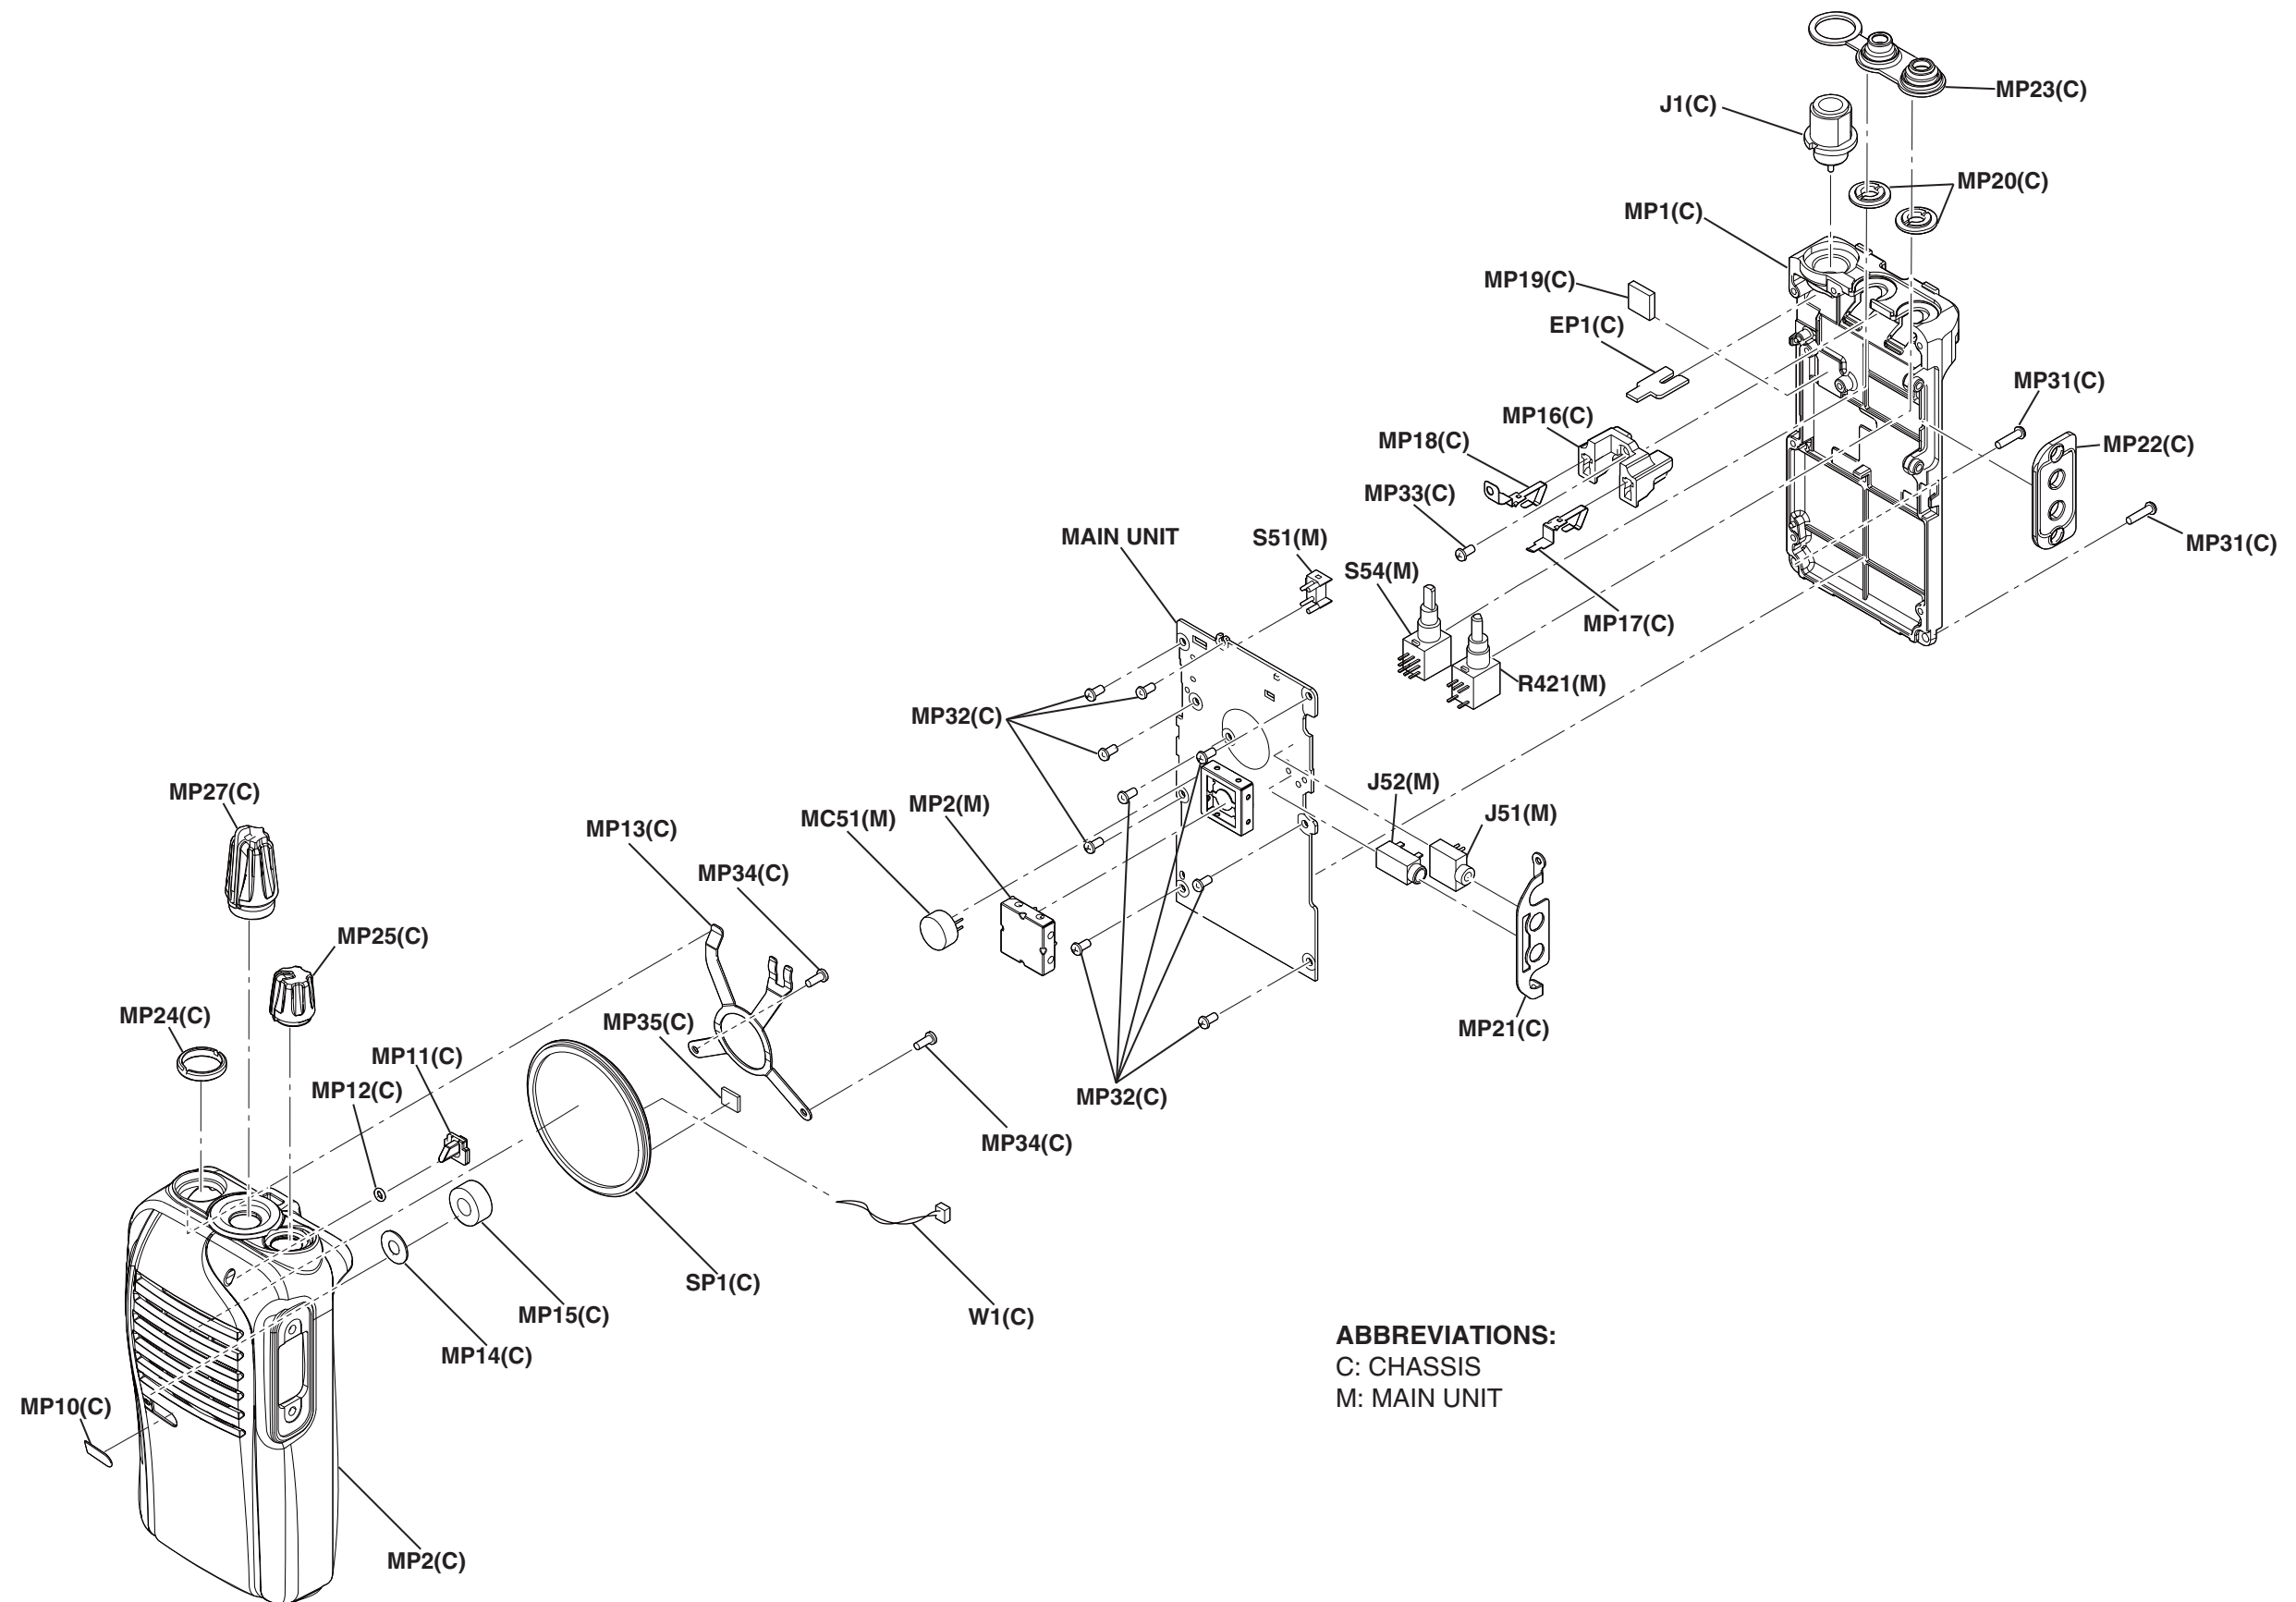

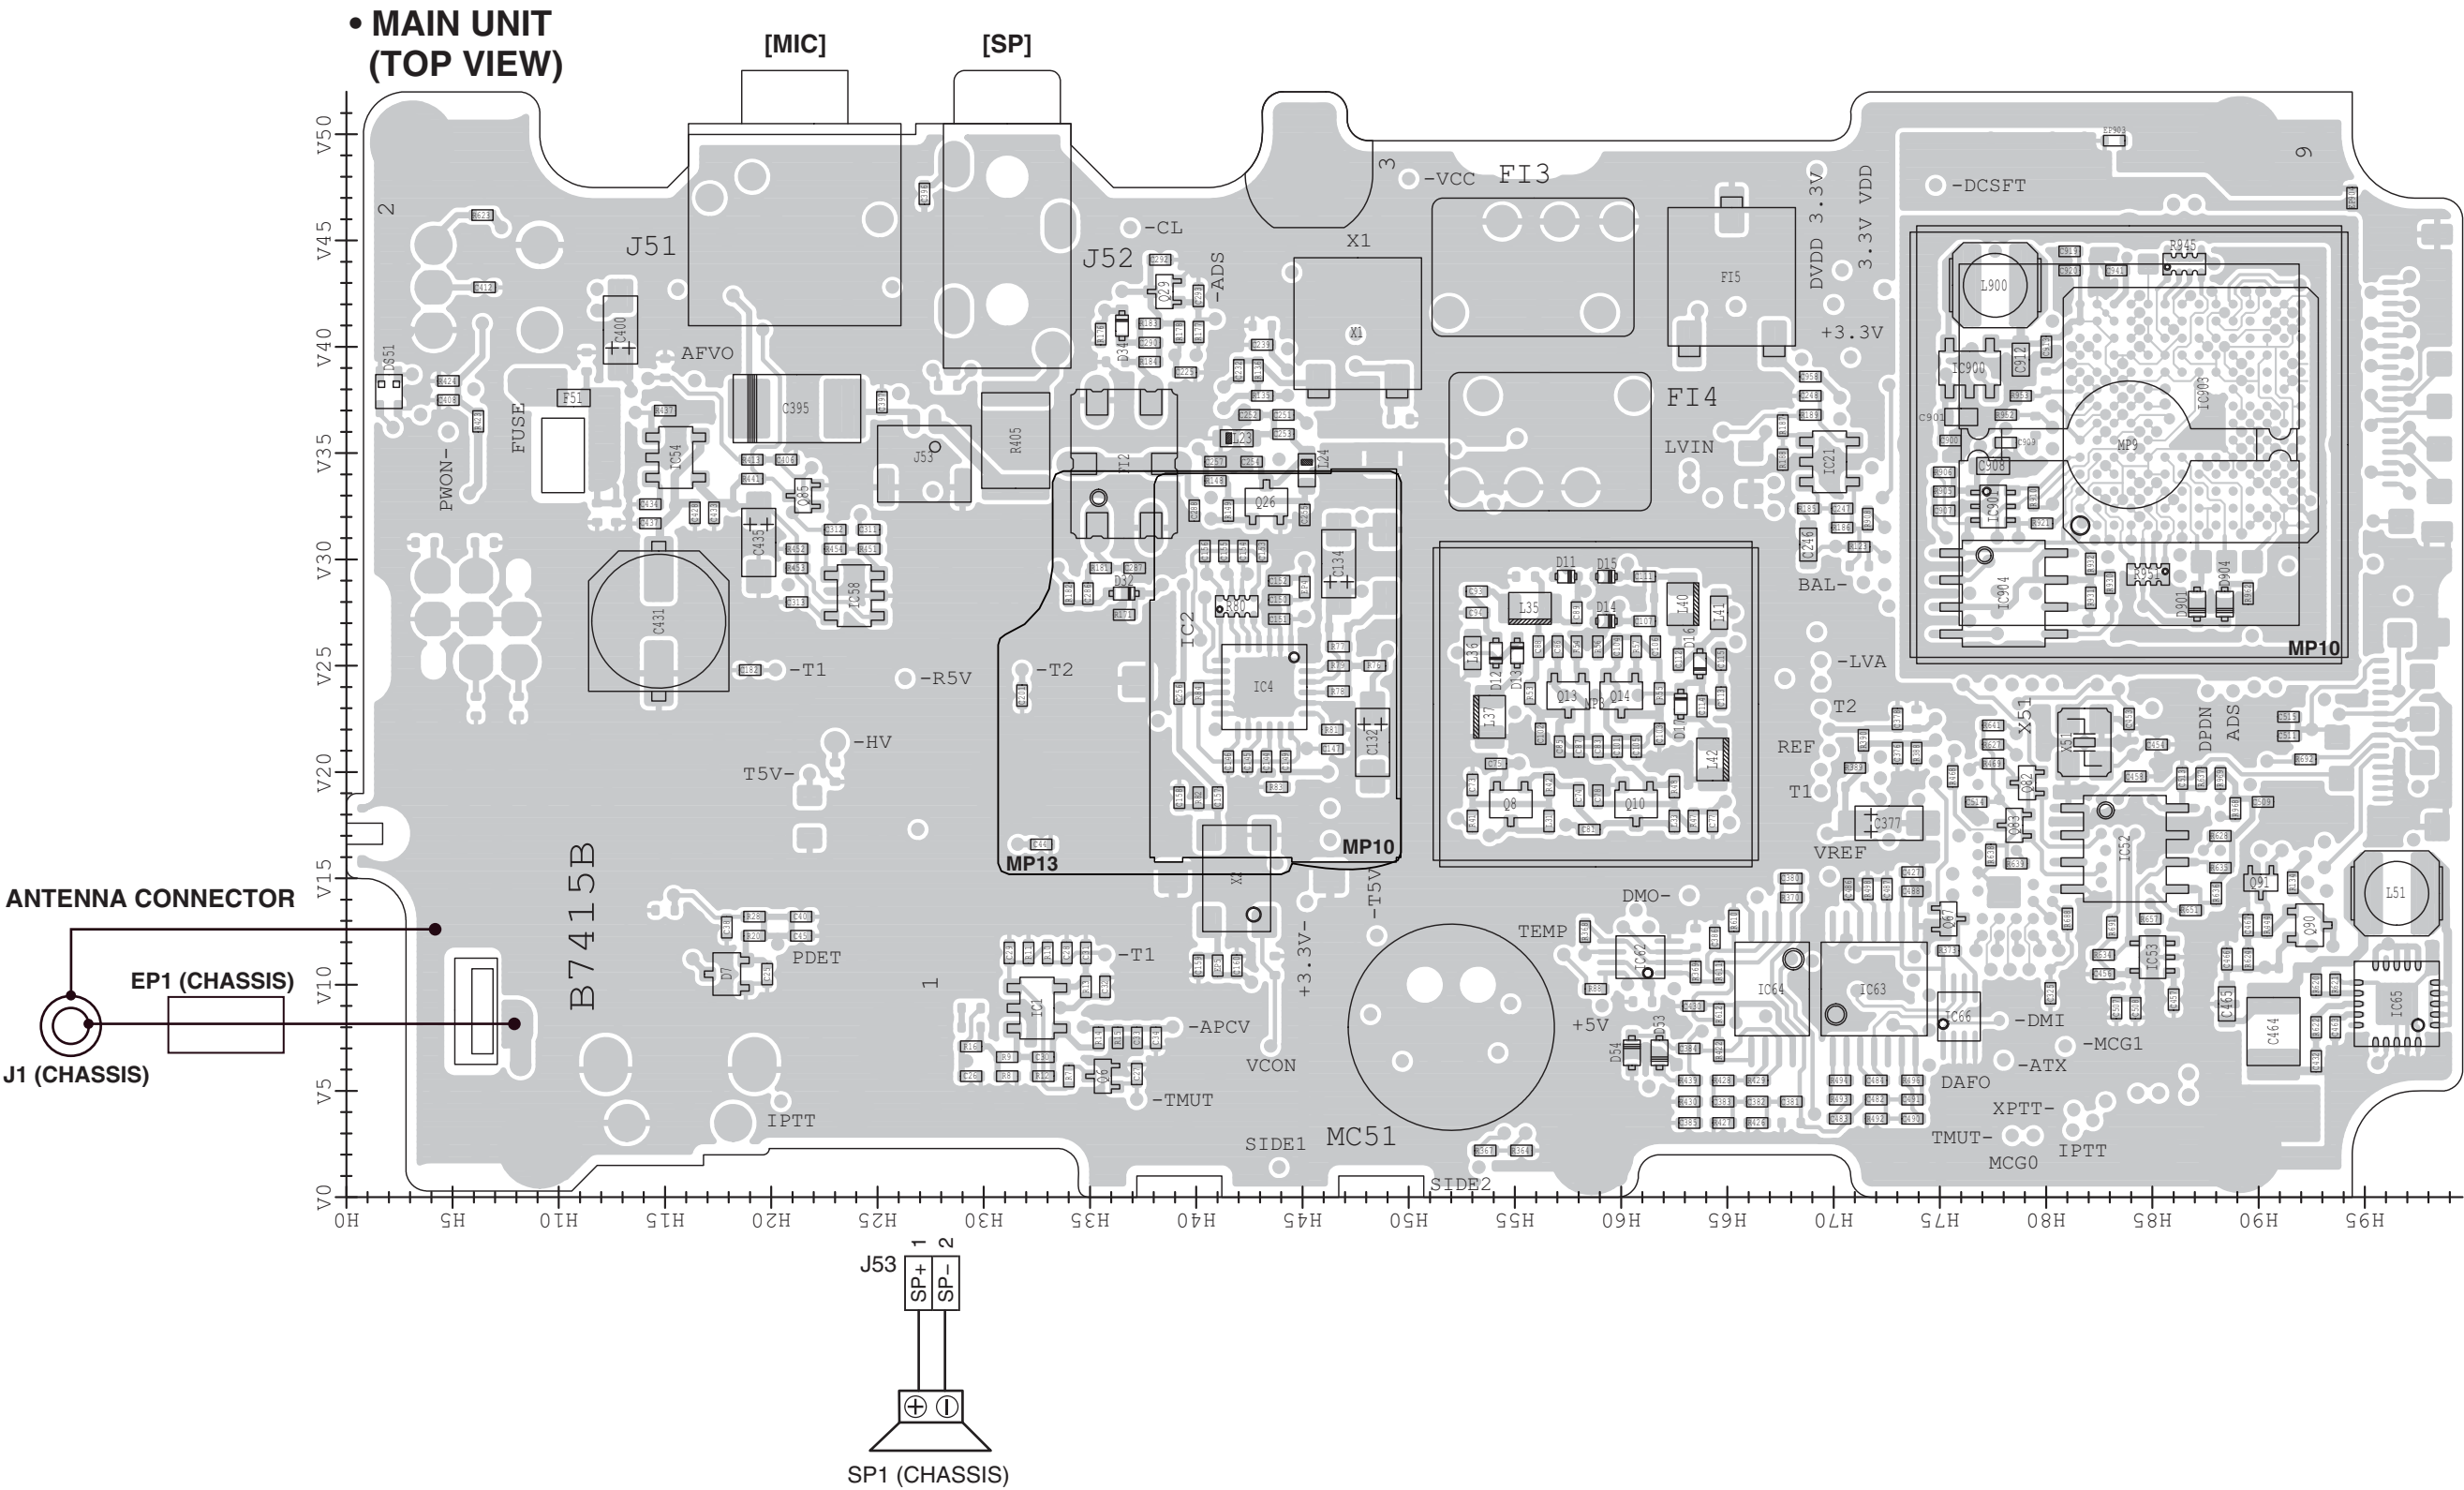


• MAIN UNIT
(BOTTOM VIEW)

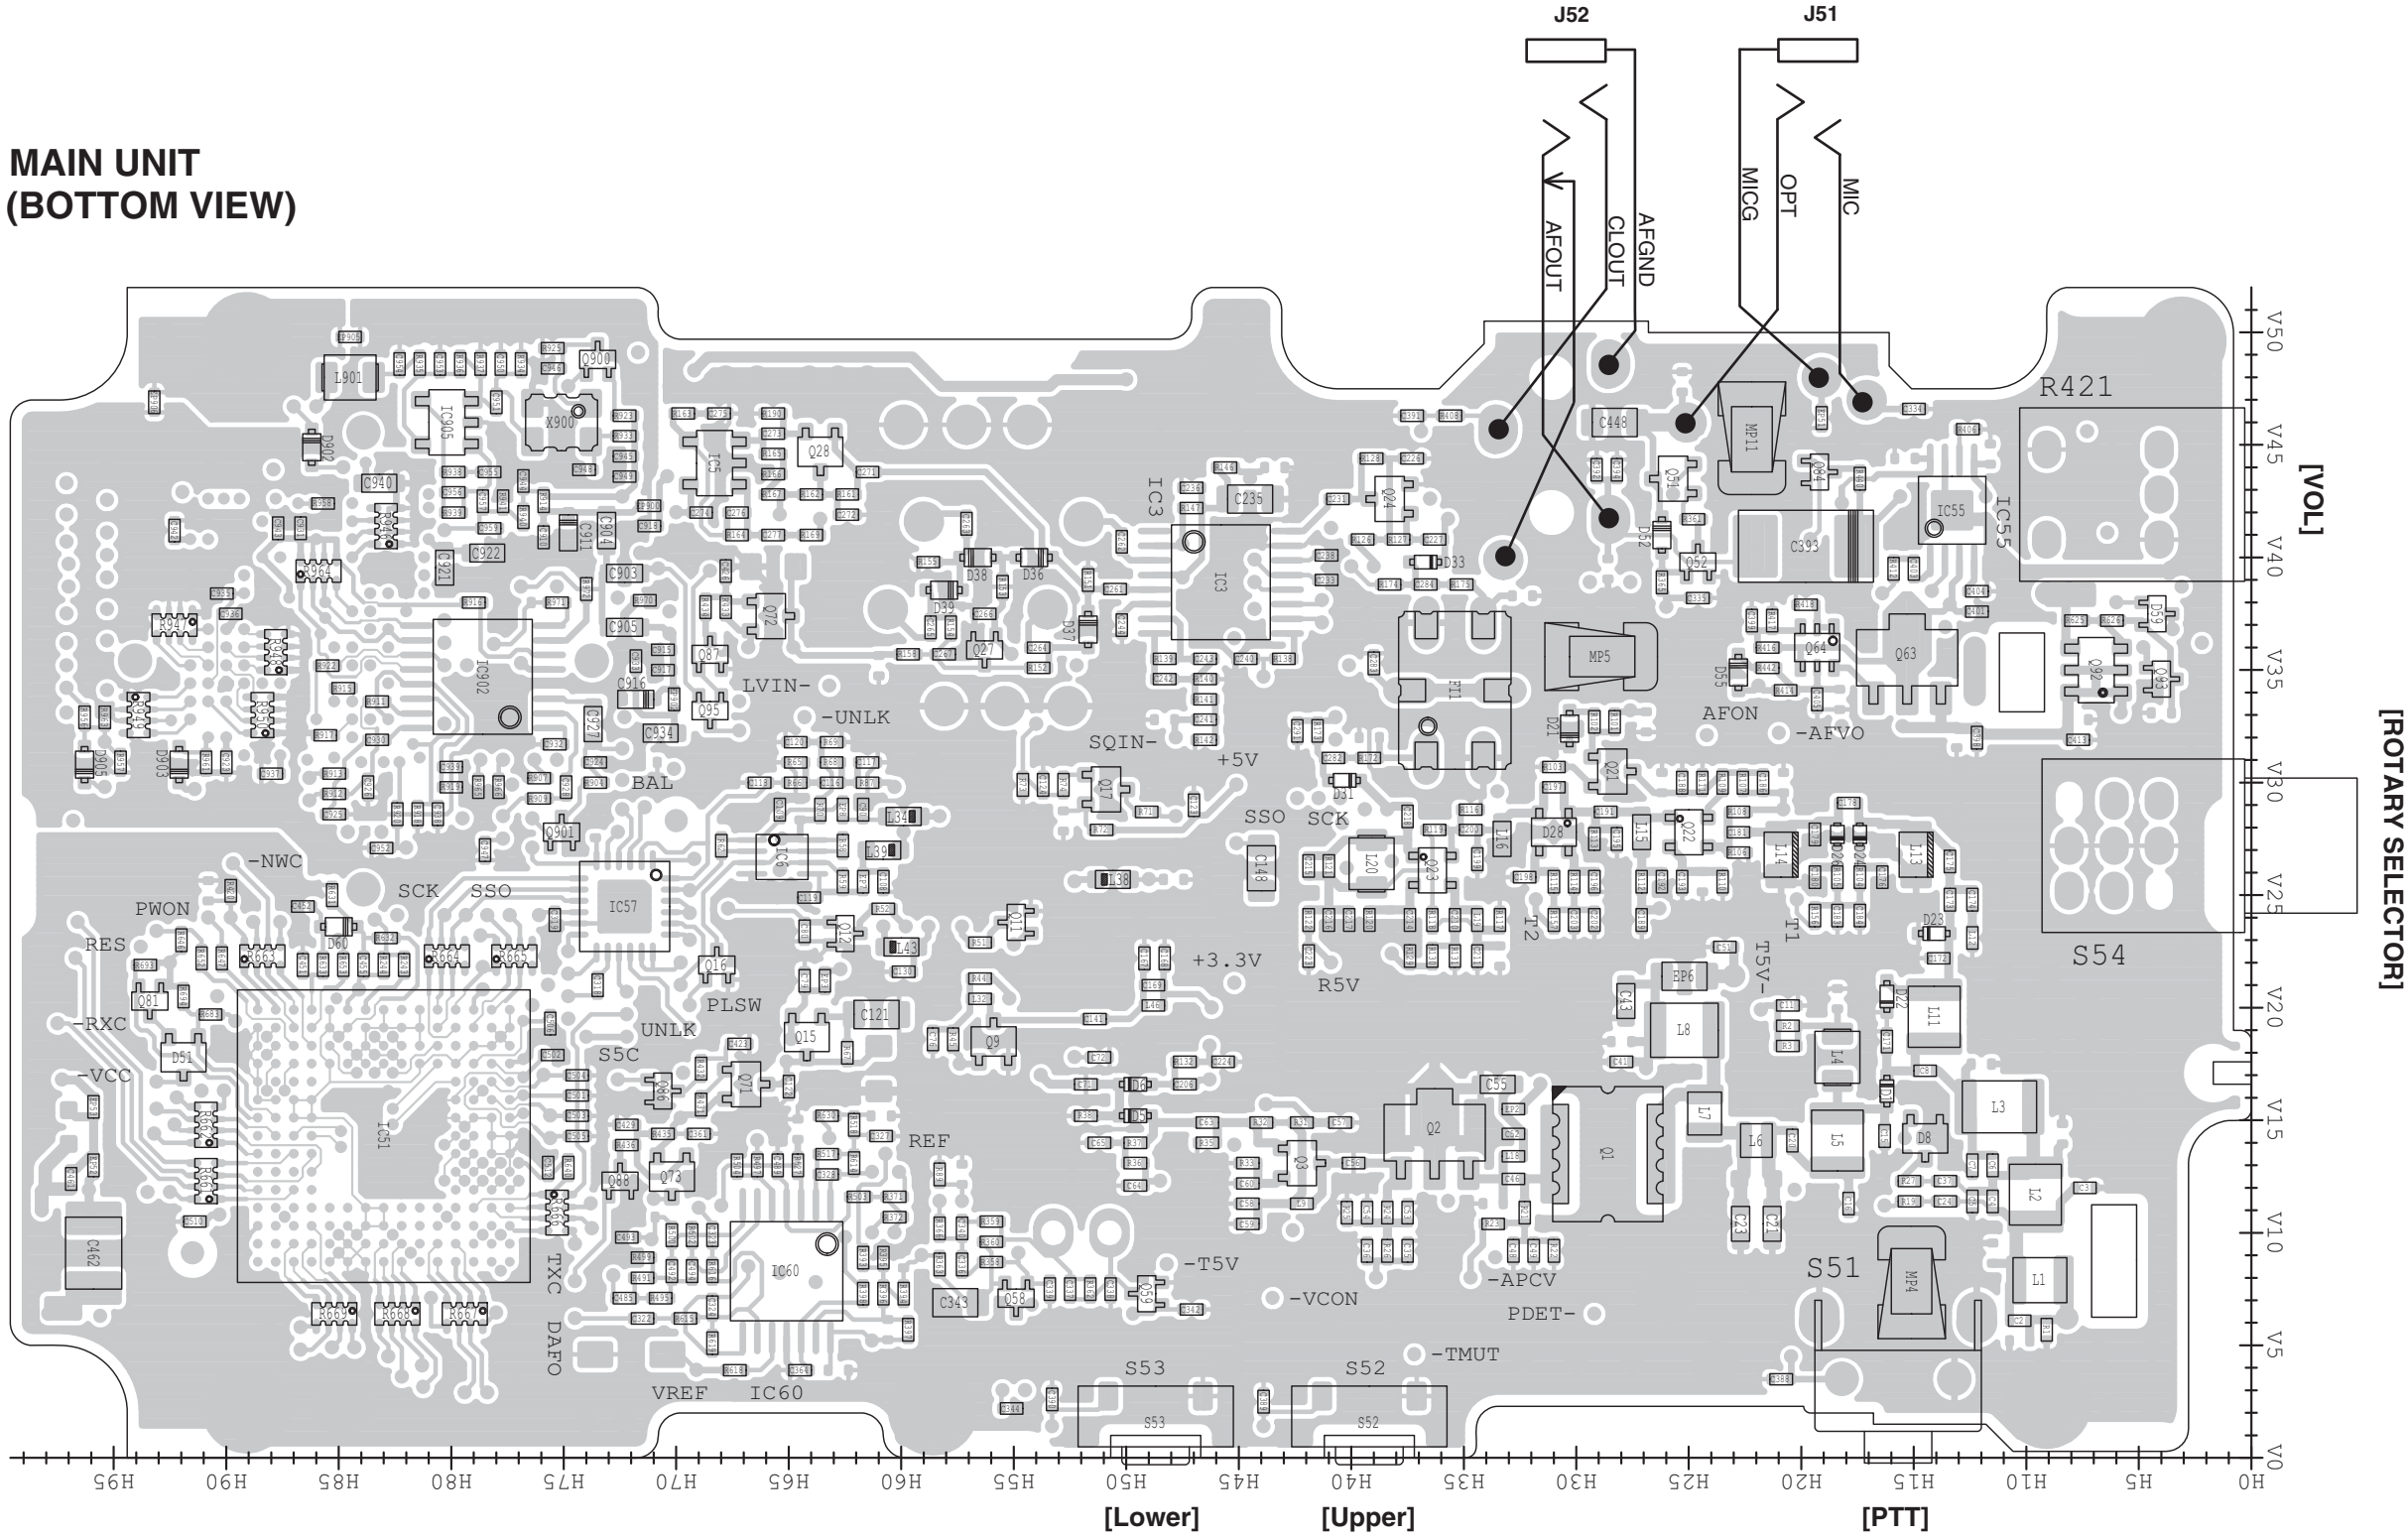

SECTION 9


BLOCK DIAGRAM

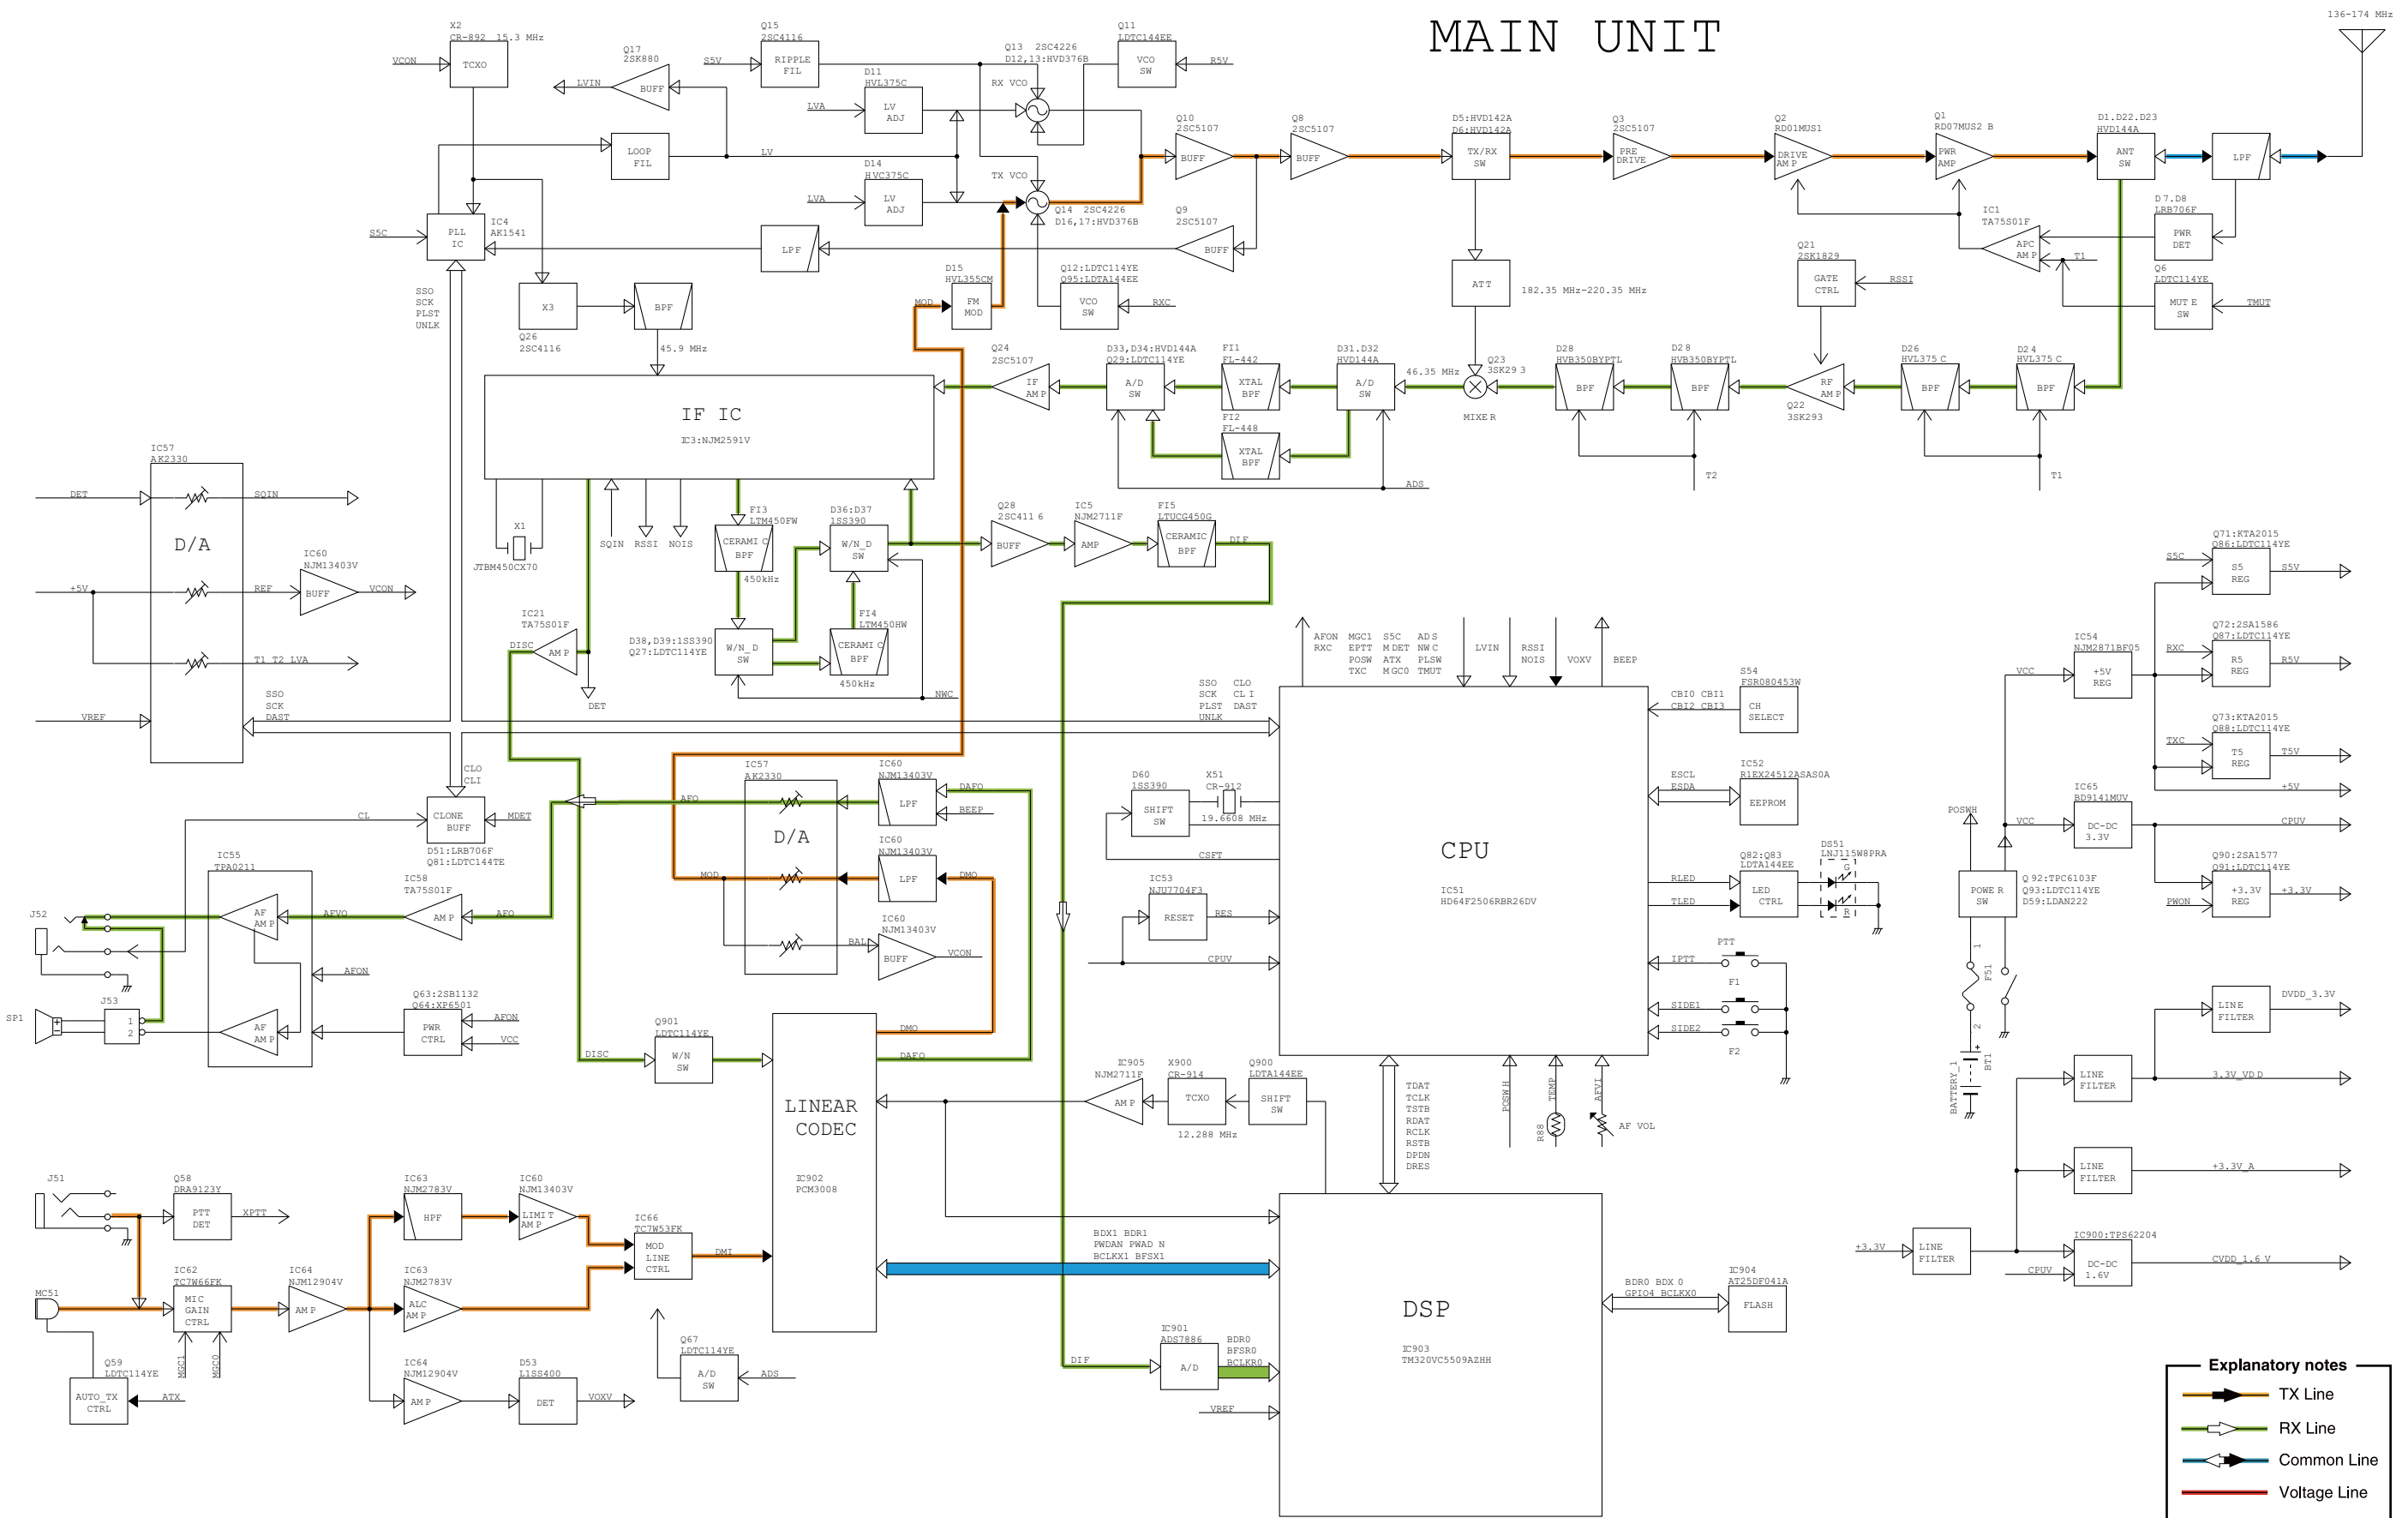

VOLTAGE DIAGRAM


Explanatory notes

- TX Line
- RX Line
- Common Line
- Voltage Line

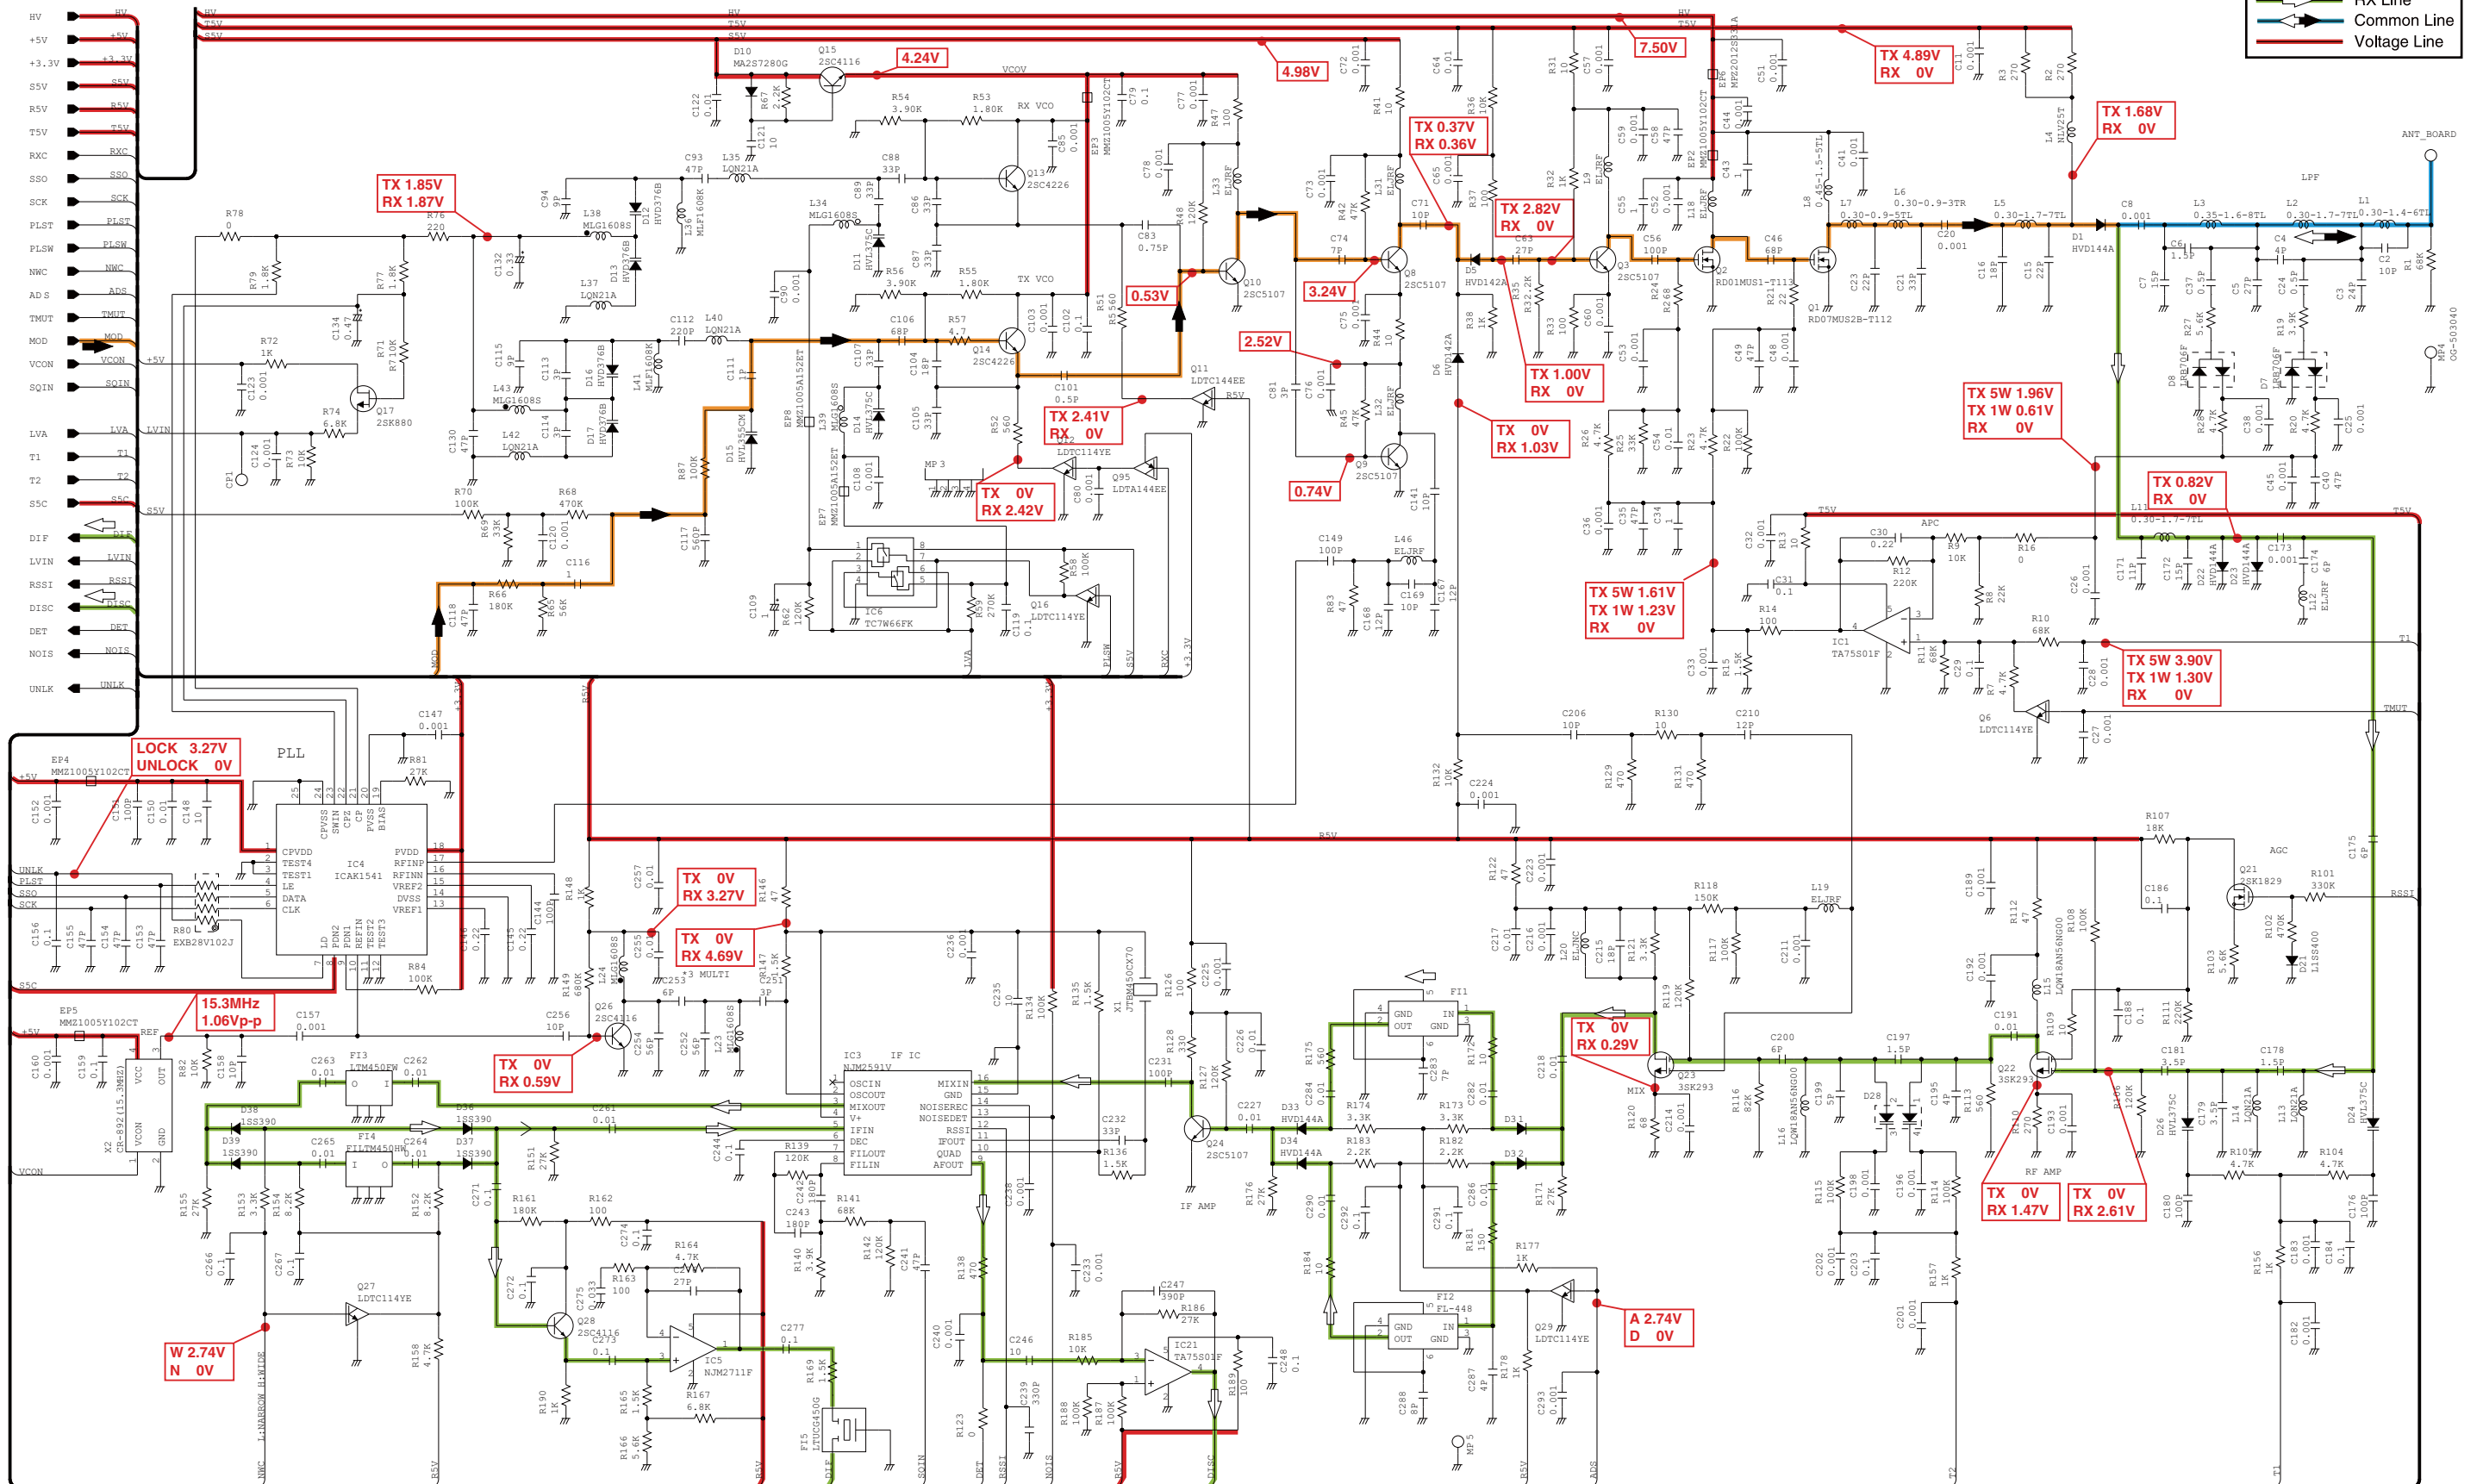


10 - 1

• MAIN UNIT (2/3)

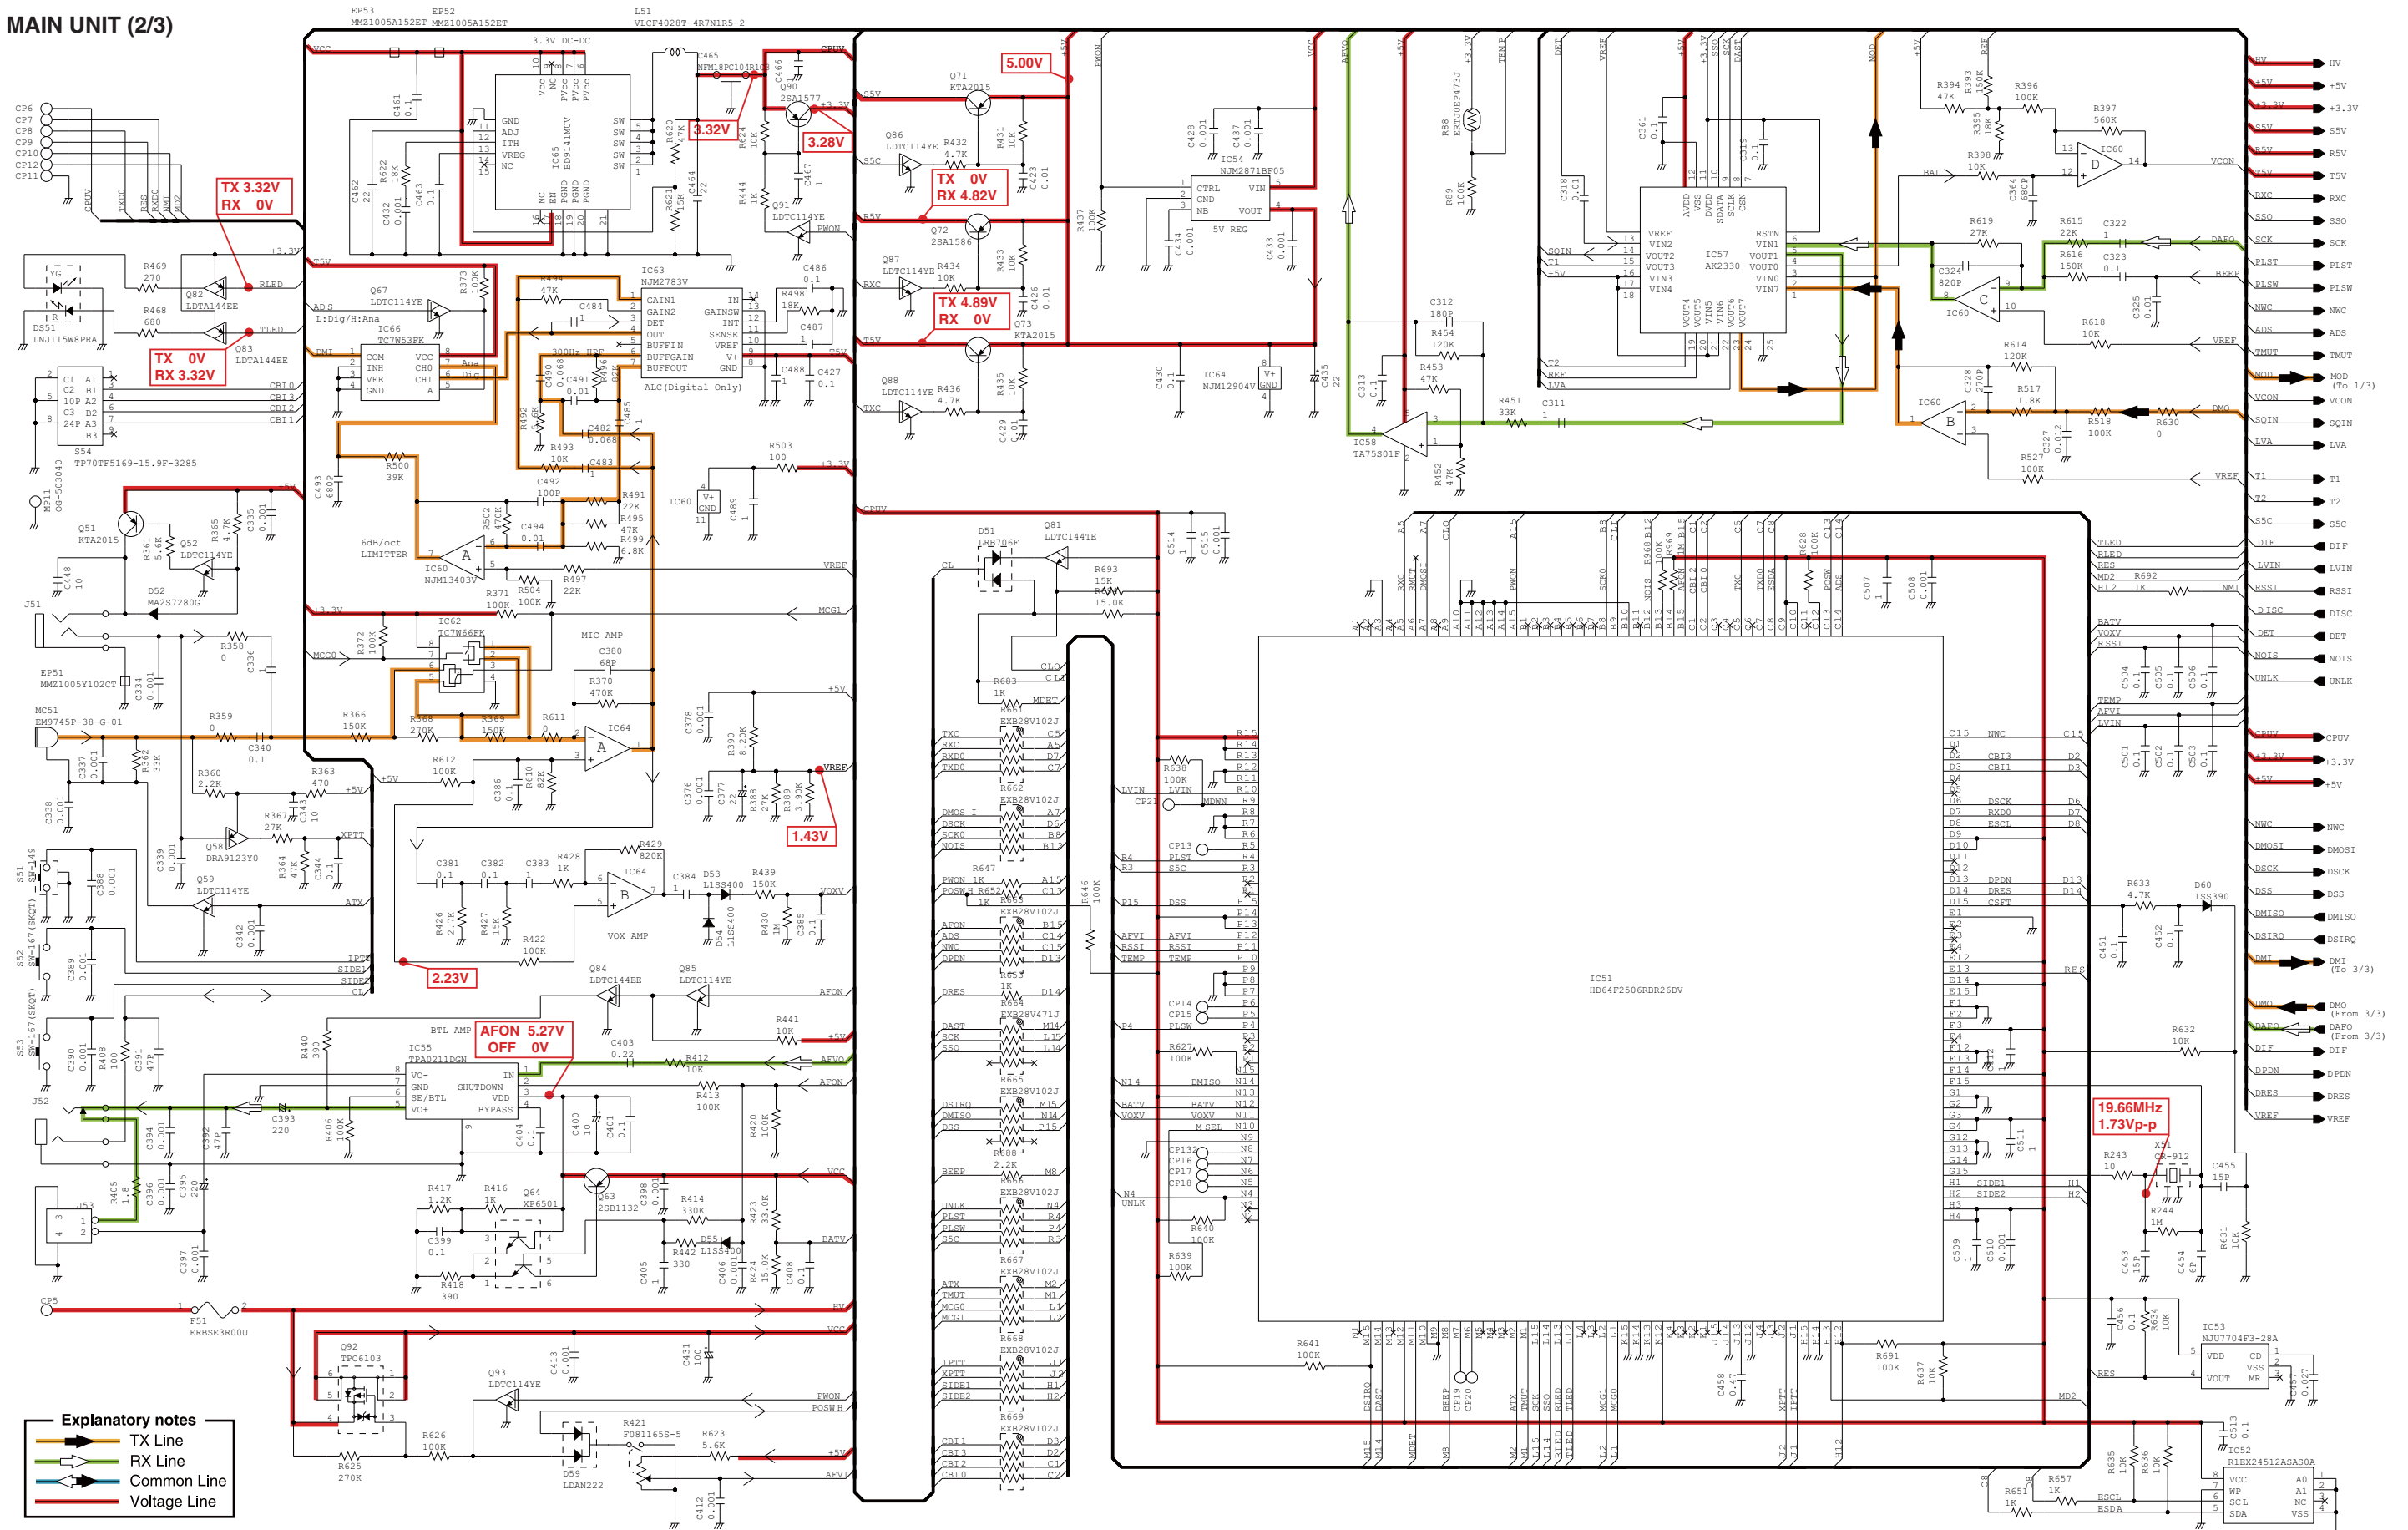

*: Refer to the PARTS LIST for the value and name of component.

- **MAIN UNIT (3/3)**

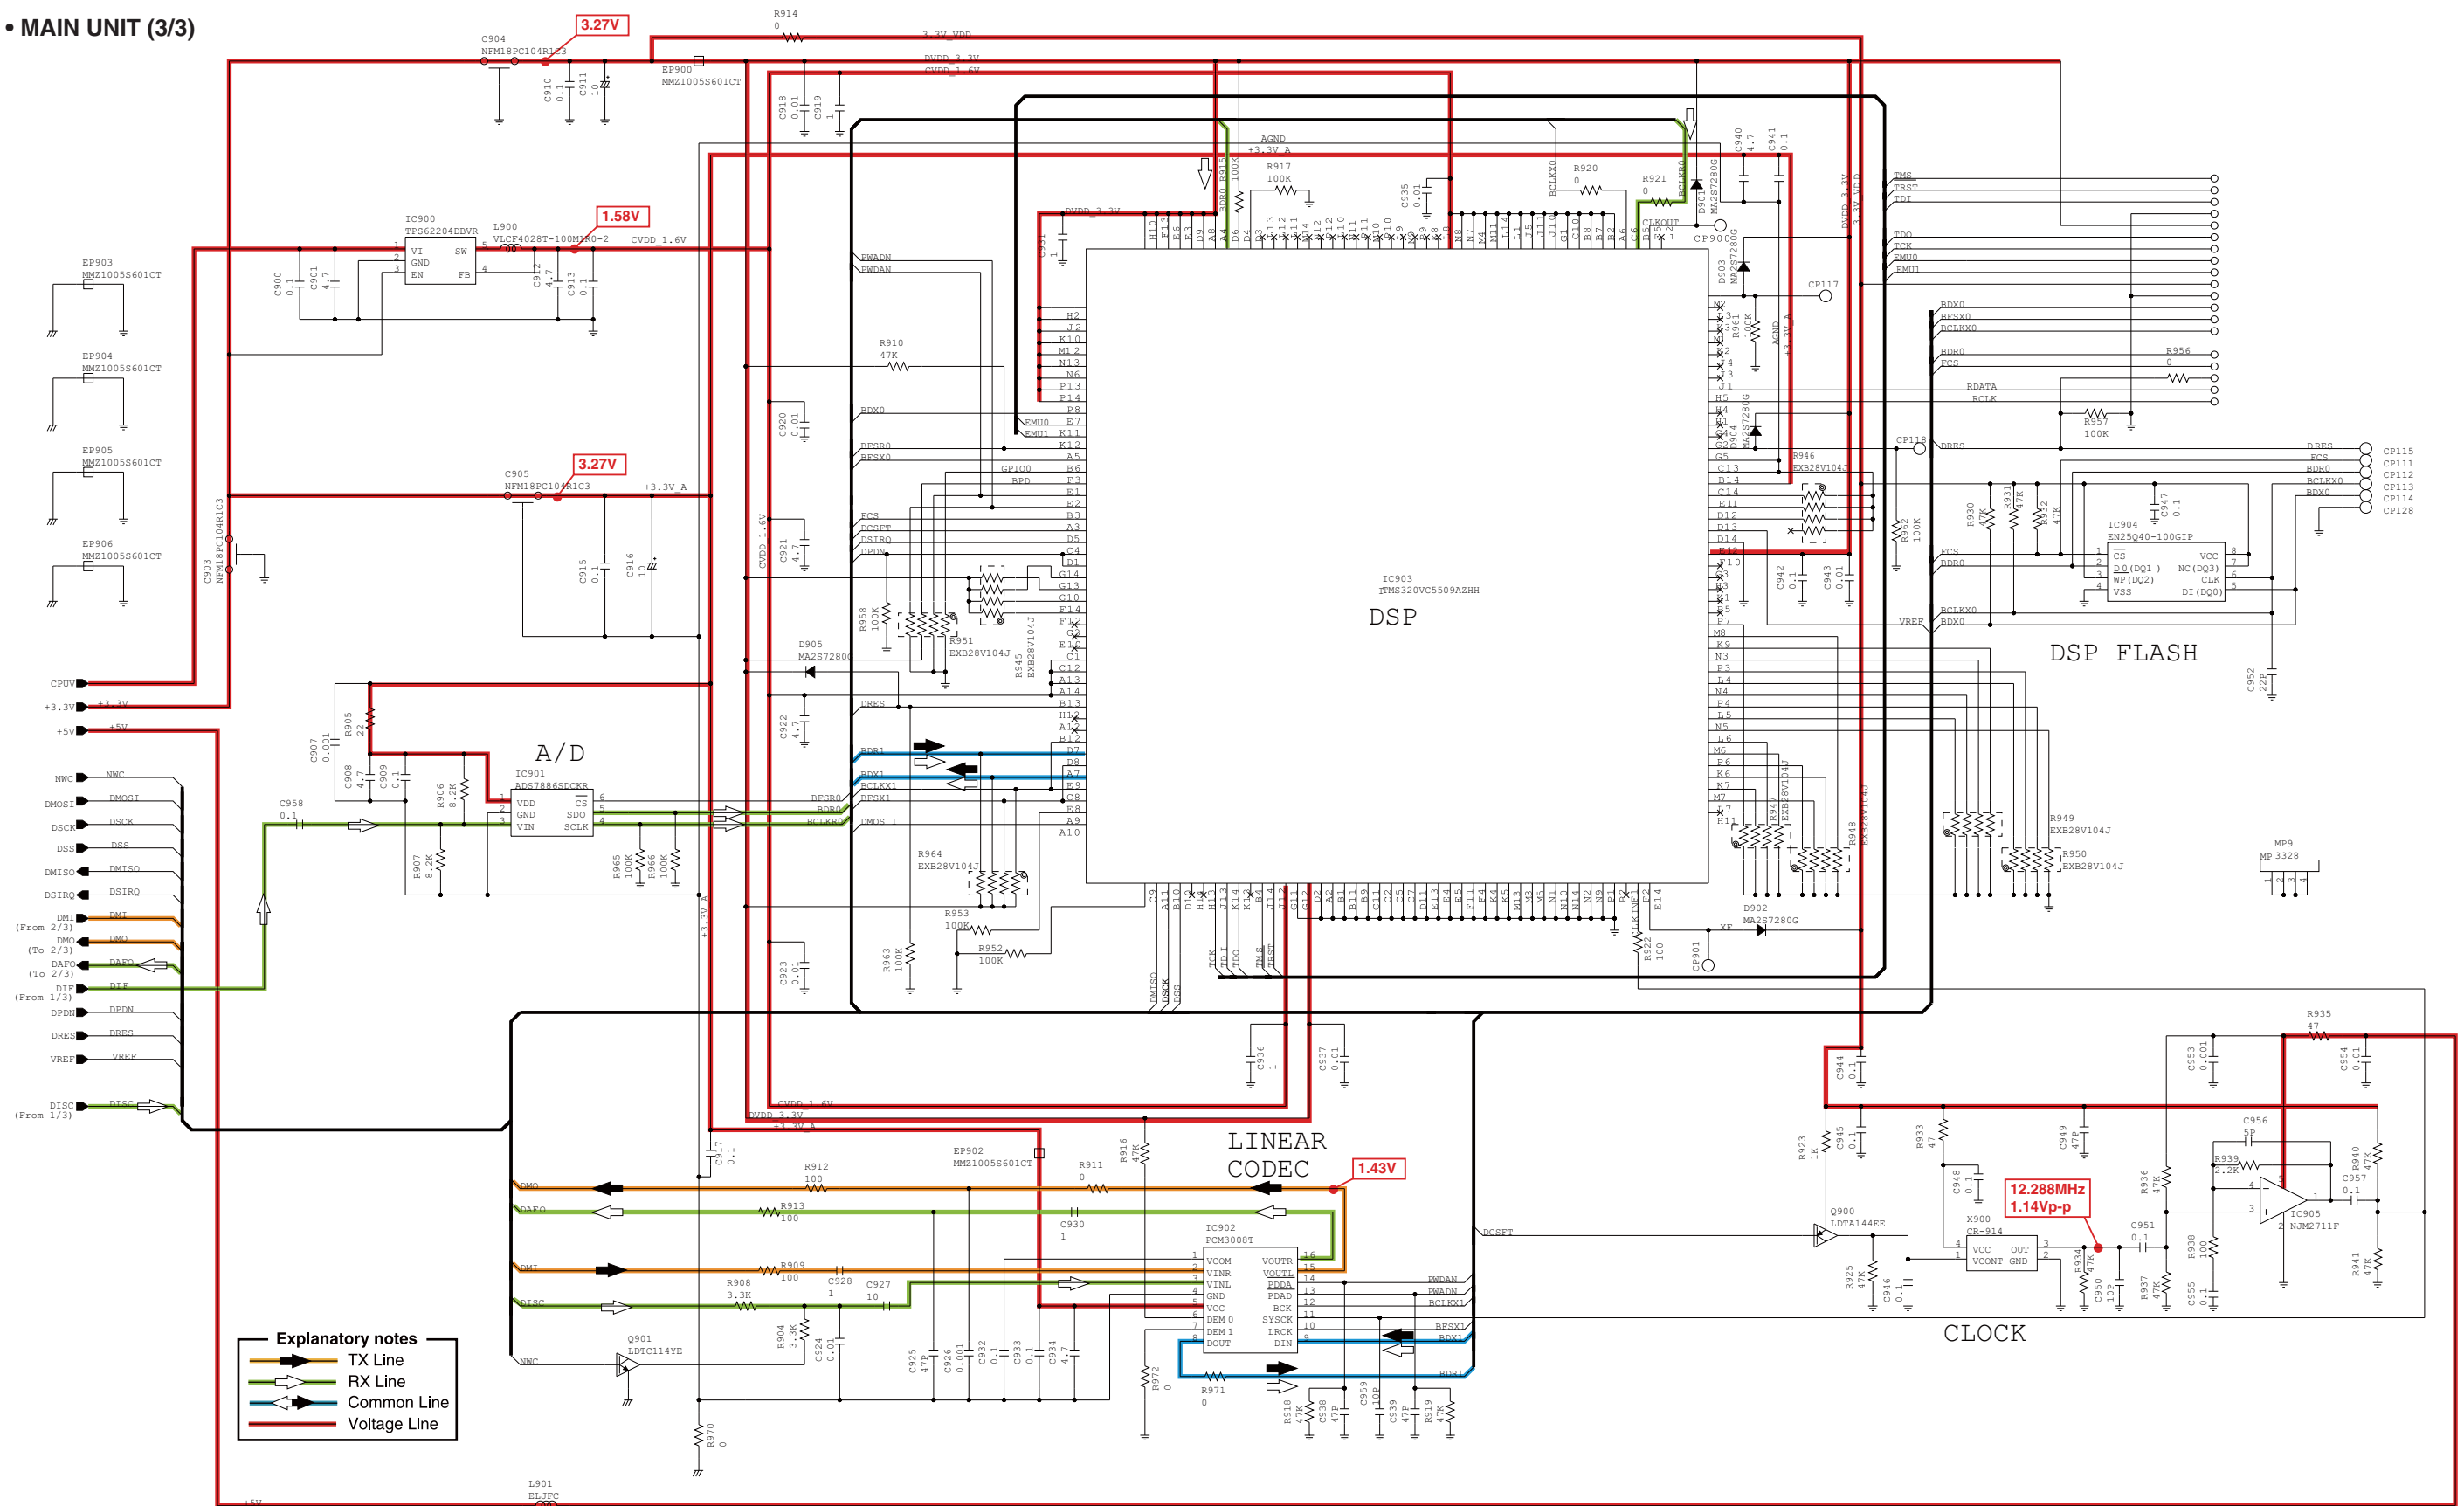

*: Refer to the PARTS LIST for the value and name of component.

Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan
Phone : +81 (06) 6793 5302
Fax : +81 (06) 6793 0013
URL : <http://www.icom.co.jp/world/index.html>

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155 Fax : +1 (425) 454-1509
URL : <http://www.icomamerica.com>
E-mail : sales@icomamerica.com
<Customer Service>
Phone : +1 (425) 454-7619

Icom Canada

Glenwood Centre #150-6165
Highway 17 Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266 Fax : +1 (604) 952-0090
URL : <http://www.icomcanada.com>
E-mail : info@icomcanada.com

Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road, Clayton VIC 3168 Australia
Phone : +61 (03) 9549-7500 Fax : +61 (03) 9549-7505
URL : <http://www.icom.net.au>
E-mail : sales@icom.net.au

Icom New Zealand

146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062 Fax : +64 (09) 274 4708
URL : <http://www.icom.co.nz>
E-mail : inquiries@icom.co.nz

Beijing Icom Ltd.

10C07, Long silver Mansion, No.88, Yong Ding
Road, Haidian District, Beijing, 100039, China
Phone : +86 (010) 5889 5391/5392/5393
Fax : +86 (010) 5889 5395
E-mail : bjicom@bjicom.com
URL : <http://www.bjicom.com>

Icom Brazil

Rua Pernambuco, 353 - Sala 901, Belo Horizonte, M.G.
30130-150, Brazil
Phone : +55 (31) 3582 8847 Fax : +55 (31) 3582 8987
E-mail : sales@icombrazil.com

Icom (Europe) GmbH

Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone : +49 (6196) 76685-0 Fax : +49 (6196) 76685-50
URL : <http://www.icomeurope.com>
E-mail : info@icomeurope.com

Icom Spain S.L

Ctra. Rubi, No. 88 Bajos A 08174, Sant Cugat del Valles, Barcelona, Spain
Phone : +34 (93) 590 26 70 Fax : +34 (93) 589 04 46
URL : <http://www.icomspain.com>
E-mail : icom@icomspain.com

Icom (UK) Ltd.

Blacksole House, Altira Park, Herne Bay, Kent CT6 6GZ, UK
Phone : +44 (0) 1227 741741 Fax : +44 (0) 1227 741742
URL : <http://www.icomuk.co.uk>
E-mail : info@icomuk.co.uk

Icom France s.a.s.

Zac de la Plaine
1 Rue Brindejonc des Moulinais BP 5804
31505 Toulouse Cedex, France
Phone : +33 (5) 61 36 03 03 Fax : +33 (5) 61 36 03 00
URL : <http://www.icom-france.com>
E-mail : icom@icom-france.com

Asia Icom Inc.

6F No.68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899 Fax : +886 (02) 2559 1874
URL : <http://www.asia-icom.com>
E-mail : sales@asia-icom.com

Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland
Phone : +48 (58) 550 7135 Fax : +48 (58) 551 0484
E-mail : icompolska@icompolska.com.pl

Count on us!