

# エクステンデッド ターミナル ET11

本製品は、直流安定化電源の後面出力端子または負荷装置の入力端子をバインディングポストに変換する拡張ターミナルです。  
ET11で使用できる最大電流は30Aです。

マグネットシートで固定するため、使いやすい場所に取り付けることができます。また、バインディングポストカバーは、左右どちらでも取り付けられますので入出力線の引き出し方向を選択することができます。  
PASシリーズ700Wを例に基本的な取付方法を図1で説明します。

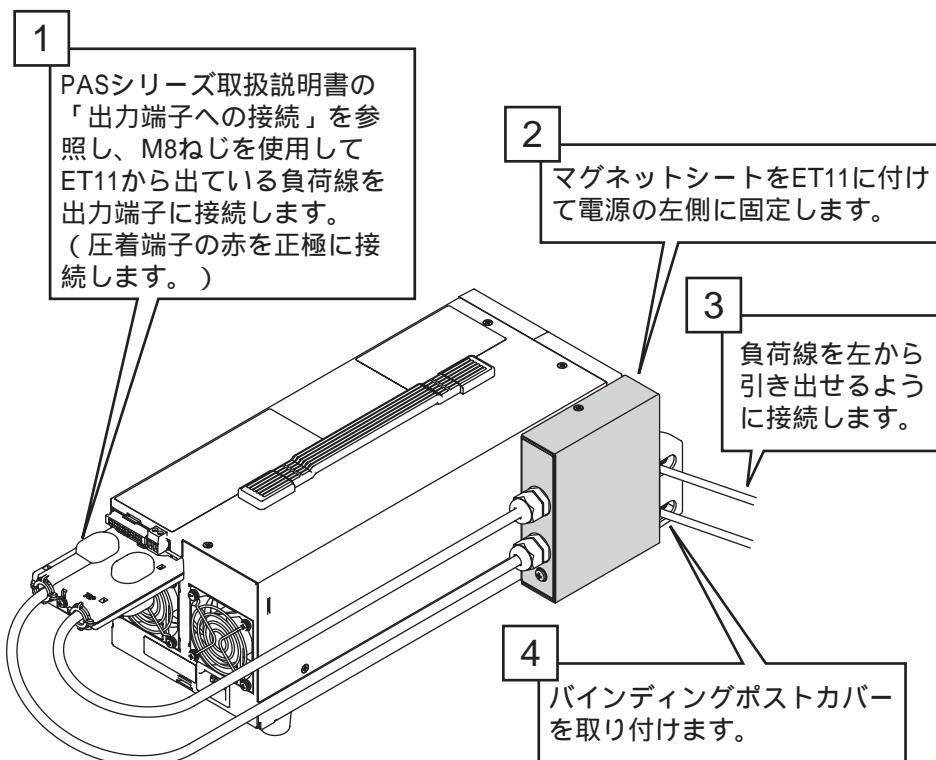


図1 取付例

## 警告

- 感電防止のため、電源または負荷装置に付属の端子カバーとET11に付属のバインディングポストカバーは、必ず取り付けてご使用ください。

## 注意

- ET11を使用すると、入出力線を長くすることになりますので、電圧変動、電流変動、リップルなどの仕様に影響を与えます。
- ET11は、強力な磁石を使用しますので、磁気の影響を受ける測定器などの近くに設置しないでください。

## ET11の仕様

項目	仕様
最大電圧	DC 600 V
最大電流	DC 30 A
寸法(最大)	124 (130) W x 34 H x 100 (160+ケーブル) D
質量	約700 g

## ET11の構成

No.	DESCRIPTION	QTY
1	エクステンデッドターミナル ET11	1
2	マグネットシート	1
3	バインディングポストカバー	1

Part No. Z1-002-610 IA002702

 KIKUSUI

菊水電子工業株式会社

本社・技術センター 〒224-0023 横浜市都筑区東山田 1-1-3 TEL: 045-593-0200 (代)

# Extended Terminal ET11

This product is an extended terminal used to convert the output terminal on the rear panel of the Regulated DC Power Supply or the input terminal of a the Electronic Load to a binding post.

The maximum current allowed on the ET11 is 30 A.

Since the ET11 can be fixed in place using a magnet sheet, it can be attached at a convenient location. The binding post cover can be attached facing left or right allowing the input/output wires to be brought out in either direction.

The basic attachment procedures are explained using PAS Series 700W as shown in Fig. 1.

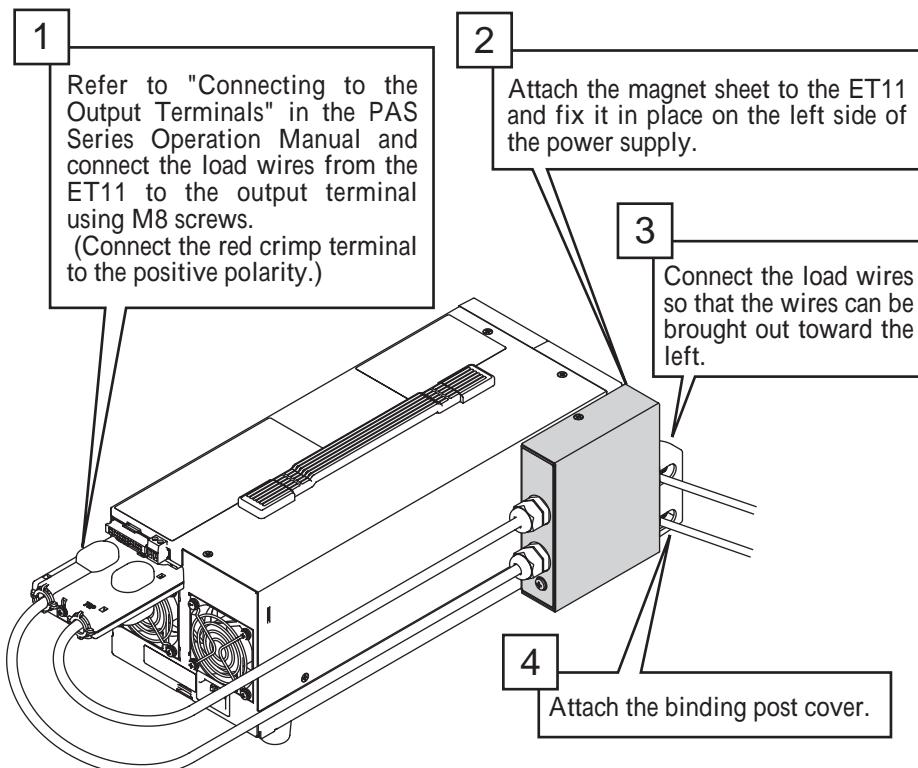


Fig. 1 Attachment Example

## WARNING

- To prevent the possibility of electrical shock, be sure to attach the terminal cover provided with the power supply or the Electronic Load and the binding post cover provided with the ET11.

## CAUTION

- When using the ET11, the input/output wires are extended, thereby affecting the specifications of voltage fluctuation, current fluctuation, ripple, and so on.
- The ET11 uses a powerful magnet. Do not place the ET11 near measuring instruments that are affected by magnetism.

## ET11 Specifications

Item	Specification
Maximum voltage	600 VDC
Maximum current	30 ADC
Dimensions (max.)	124 (130) W x 34 H x 100 (160 + cable) D (Unit: mm)
Weight Approx.	700 g

## ET11 Contents

No.	DESCRIPTION	QTY
1	Extended Terminal ET11	1
2	Magnet Sheet	1
3	Binding Post Cover	1



KIKUSUI ELECTRONICS CORP.

1-1-3, Higashiyamata, Tsuzuki-ku, Yokohama, 224-0023, Japan

Tel : 045-593-7570 Fax : 045-593-7571