


BRACKET KRB2-TOS


次の手順で機器にブラケットを取付け、ラックに組み込みます。

1. 底部のゴム足を取り外します。側面にハンドル、ゴム足等がある場合はこれらも取り外します。

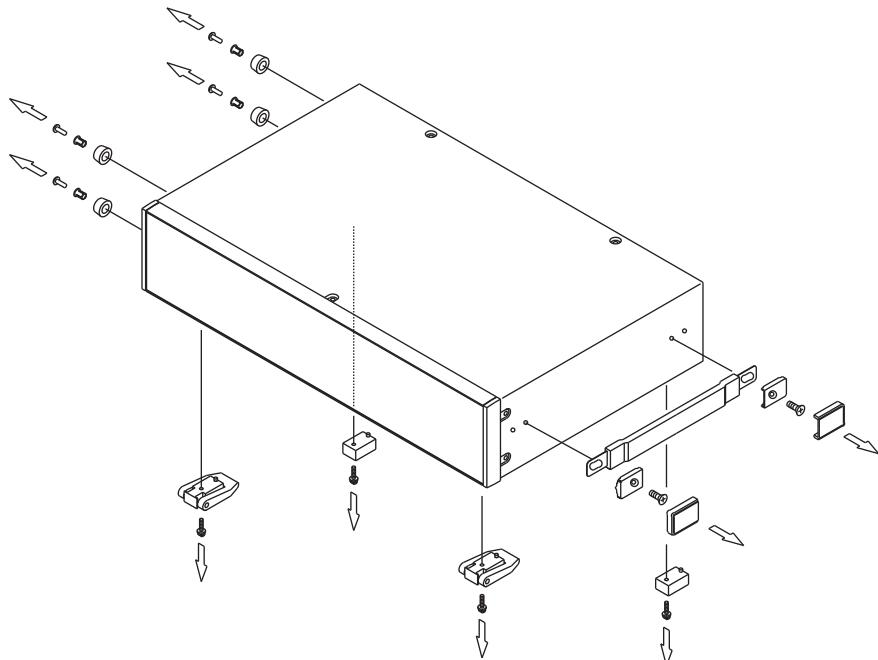


2. 付属しているねじを使用してブラケットを図のように取り付けます。


付属ねじ(M3x10皿ねじ)以外は使用しないでください。

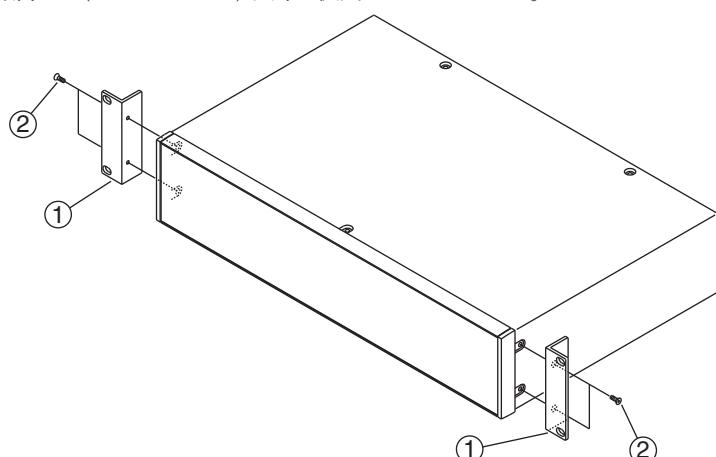

3. 付属のねじとワッシャを使用してラックに取り付けます。

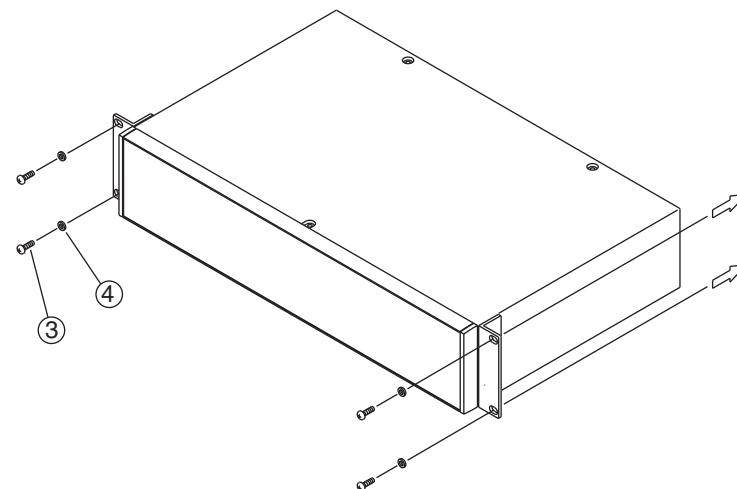

注意 機器が落下する恐れがあります。
使用するラックに適合したサポートアングルを取り付けて、本体を支持してください。



No.	DESCRIPTION	QTY
1	BRACKET KRB2-TOS	2
2	FLAT HEAD SCREW M3x0.5x10	4
3	BIND SCREW M5x0.8x10	4
4	WASHER M5W B-NI	4

Part No. Z1-901-160, IA002593

 **KIKUSUI**


菊水電子工業株式会社

本社・技術センター 〒224-0023 横浜市都筑区東山田 1-1-3 TEL: 045-593-0200 (代)


BRACKET KRB2-TOS

Install the brackets to the instrument in the next procedure and build in it to the rack.


1. Remove the rubber feet on the bottom panel. When parts such as carrying handle and rubber foot are installed on the side panels, also remove the parts.

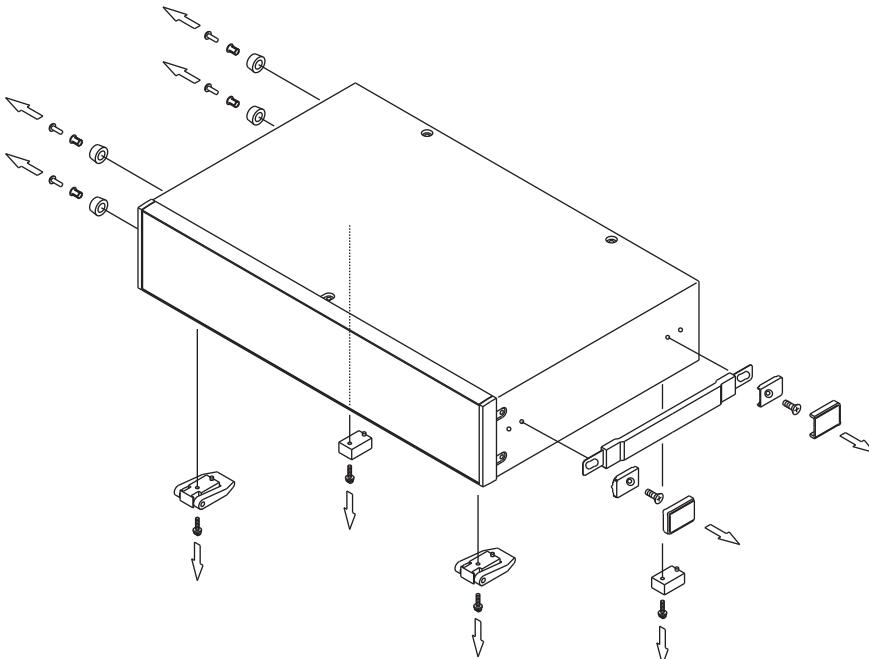


2. As shown in figure, using the accompanying screws, install the brackets. Do not use except the accompanying screws (M3 x 10).

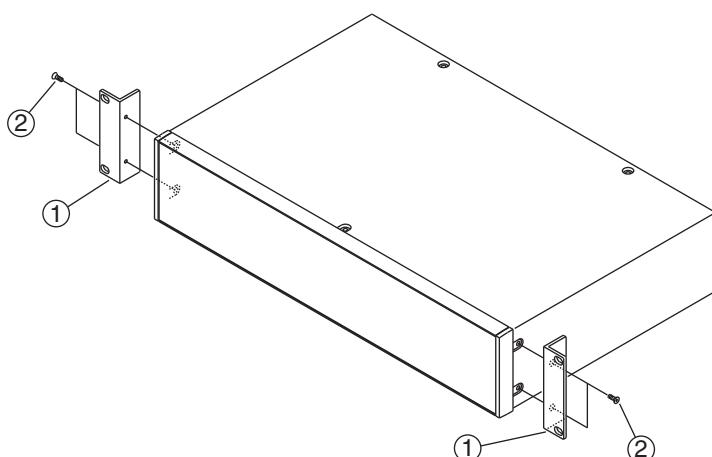

3. Using the accompanying screws and washers, mount the instrument in the rack.

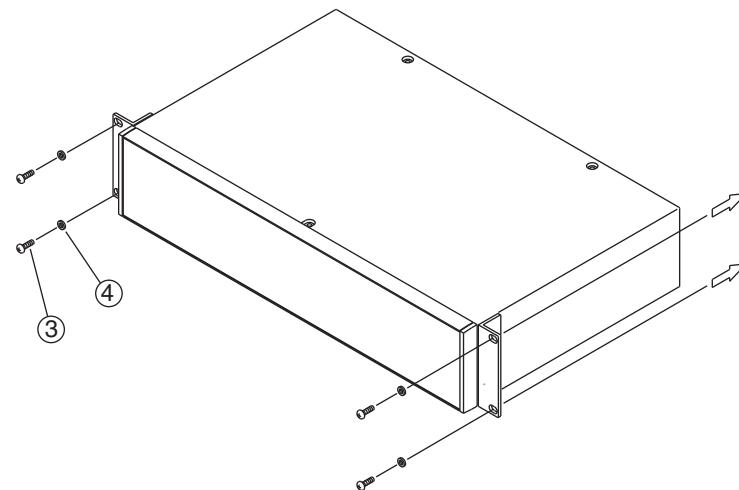

CAUTION The instrument may fall.
Install the suitable support angles applying to the used rack system to support the instrument.



No.	DESCRIPTION	QTY
1	BRACKET KRB2-TOS	2
2	FLAT HEAD SCREW M3x0.5x10	4
3	BIND SCREW M5x0.8x10	4
4	WASHER M5W B-NI	4



KIKUSUI ELECTRONICS CORP.

1-1-3, Higashiyamata, Tsuzuki-ku, Yokohama, 244-0023, Japan