


250MS/s Single-Channel Arbitrary Waveform Generator

TABOR'S NEW
WW
WONDER WAVE
SERIES

MODEL WW2571

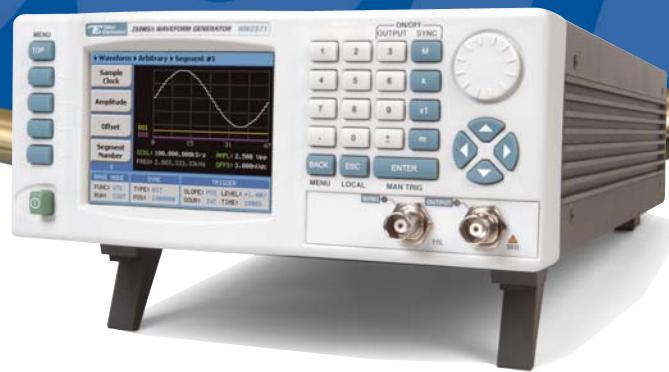

- Single-channel 250 MS/s waveform generator
- Sine and Square waves generated to 100MHz
- 16 Bit amplitude resolution
- 14 digits frequency resolution (limited by 1 μ Hz)
- 1M waveform memory, 2M waveform memory, optional
- 16 Vpp into 50 Ω , double into open circuit
- DDS technology delivers extremely low phase noise signals
- Powerful sequence generator links and loops segments in user-defined fashion. Stores up to 100 different sequence tables
- Multiple run modes including trigger, re-trigger and trigger delay

- 16 Bit LVDS parallel output
- AM, FM, Arbitrary FM, FSK, (n)PSK, Frequency Hop and sweep modulation
- High resolution 3.5" LCD, color display
- Ethernet 10/100, USB 2.0 and GPIB interfaces
- Calibration using an external interface without opening instrument covers
- Multi-Instrument synchronization
- ArbConnection software for easy waveform creation & control

Model 2571, is a single-channel frequency agile waveform synthesizer combine industry leading performance, frequency agility and modulation capability in a stand-alone, bench-type product. Signal output in the range of 1Hz to 250MHz and 16-bit vertical DAC resolution provide the test stimuli required for the decades to come. It can be used as an arbitrary waveform generator, modulating generator, as well as function and pulse generator.

250MS/s Performance

Higher performance test equipment and systems are needed as products which use increasing signal bandwidths are developed. The sample rate generator can be programmed from frequencies as low as 1Hz to 250MS/s with superior waveform quality and purity. For example, phase noise is typically below 120dB/Hz at 10kHz offset for a 10MHz sine wave.

High Speed Function Generator

Interested in standard functions? There are 10 built-in functions that cover most routine requirements. These are sine, triangle, square, pulse, ramp, sinc, Gaussian, exponential, noise, as well as DC. Sine and square waves can be generated from frequencies as low as 100 μ Hz to frequencies as high as 100MHz. All functions and their respective parameters are accessible via the front panel.

Waveform Memory

Longer waveform memory minimizes test duration by allowing multiple waveforms to be loaded simultaneously and retrieved as needed for the specific test. Both channels come with 1M points of memory as standard. Optional 2M memory is available for applications requiring longer memory.

Digital Outputs

16-bits are available as digital patterns from a rear-panel VHDCI connector. Output level is LVDS which is efficient and sufficient for high speed digital data transmissions.

Digital patterns are built the same way as arbitrary waveforms; thus the immense power of the waveform generator with all its functions and features is harnessed behind this output turning the 2571 into the most powerful pattern generator in its class.

Frequency Agility

Decrypting radio transmission often employs frequency hopping. The 2571 provides breakthrough technology that allows simulation of 12-bit decrypted code as easy as writing a simple hop table. The frequency hop mode is fast, coherent and provides a great tool for simulating code transmission without loosing speed and integrity.



TABOR ELECTRONICS Ltd.

250MS/s Single-Channel Arbitrary Waveform Generator

Model WW2571



Memory Segmentation and Sequencing

Solving almost every complex application, powerful segmentation and sequencing produce an endless variety of complex waveforms. The waveform memory can be divided into multiple waveform segments and sequenced in user-selectable fashion to create complex waveforms that have repeatable segments and thus saving precious memory space. Five different advance modes are available for the 2571 series to step through the sequence table, including stepped and mixed advance modes and thus increasing efficiency of the test system. To solve even the toughest application, the products allow generation of up to 100 different sequences, each capable of linking 16k waveform fragments and looping each waveform up to 1M times.

Accurate Output

As standard, the instrument is equipped with an internal frequency reference that has 1ppm accuracy and stability over a period of 1 year. An external frequency reference is provided on the rear panel for applications requiring greater accuracy or stability, supported by the instrument's 14 digits resolution.

Modulation Capability

Agility and modulation capabilities open the door to diverse applications. In addition to the capability of generating any shape and style of waveform with the arbitrary waveform generation power, the products can also do standard modulation schemes such as FM, AM, FSK, PSK, and frequency hops without sacrificing the power of the instrument control and output run modes.

Easy to use

Large and user-friendly 3.5" back-lit color LCD display facilitates browsing through menus, updating parameters and displaying detailed and critical information for your waveform output. Combined with numeric keypad, cursor position control and a dial, the front panel controls simplifies the often complex operation of an arbitrary waveform generator.

High Speed Access

Access speed is an increasingly important requirement for test systems. Included with the instrument is a variety of interfaces: Ethernet 10/100, USB 2.0 and GPIB so one may select the interface most compatible to individual requirements. Using any of the external interfaces, controlling instrument function and features as well as downloading waveforms and sequences are fast, time saving and easily tailored to every system regardless if it is just a laptop to instrument or full-featured ATE system. IVI drivers and factory support will speed up system integration thus minimizing time-to-market and reduce system development costs significantly.

Multi-Instrument Synchronization

Multiple 2571 can be synchronized using a Master-Slave arrangement allowing users to benefit from the same high quality performance in their multi-channels needs.

Automated External Self-Calibration

Normal calibration cycles in the industry range from one to three years where instruments are sent to a service center, opened to allow access to trimmers, calibrated and certified for repeated usage. Leading-edge technology was implemented to allow calibration from any interface, USB, GPIB or LAN. Calibration factors are stored in a flash memory thus eliminating the need to open instrument covers.

ArbConnection

ArbConnection is a graphical tool that provides an unlimited source of Arbitrary Waveforms. With the ArbConnection software you can control instruments functions, modes and features. You can also create a virtually infinite amount of test waveforms. Freehand sketch allows you to draw your own custom waveform for quick analysis of analog signals. You can use the built-in equation editor to create your own exotic functions. Add or subtract components of a Fourier series to characterize digital or analog filters or inject random noise into a signal to test immunity to auxiliary noise.

250MS/s Single-Channel Arbitrary Waveform Generator

Model WW2571



Service and Support

Beyond providing precision Test & Measurement instruments, Tabor Electronics provides unparalleled service and support, and is continuously finding new ways to bring added value to its customers.

Our after-sales services are comprehensive. They include all types of repair and calibration, and a single point of contact that you can turn to whenever you need assistance. As part of our extensive support, we offer individualized, personal attention Help Desk, both online and offline, via e-mail, phone or fax.

Tabor Electronics maintains a complete repair and calibration lab as well as a standards laboratory in Israel and USA. Service is also available at regional authorized repair/calibration facilities.

Contact Tabor Electronics for the address of service facilities nearest you.

Applications

For expert technical assistance with your specific needs and objectives, contact your local sales representative or our in-house applications engineers.

Manuals, Drivers, and Software Support

Every instrument comes equipped with a dedicated manual, developer libraries, IVI drivers, and software. However, if your specific manual is lost or outdated, Tabor Electronics makes it possible to log-on to its Download Center and get the latest data "in a click".

Product Demonstrations

If your application requires that you evaluate an instrument before you purchase it, a hands-on demonstration can be arranged by contacting your local Tabor Electronics representative or the Sales Department at our Corporate Headquarters.

Five-year Warranty

Every instrument from the Woder Wave series comes with a five-year warranty. Each one has full test results, calibration certificate, and CD containing product's manual and complete software package. Our obligation under this warranty is to repair or replace any instrument or part thereof which, within five years after shipment, proves defective upon examination. To exercise this warranty, write or call your local Tabor representative, or contact Tabor Headquarters and you will be given prompt assistance and shipping instructions.

CORPORATE HEADQUARTERS

9 Hattasia St. P.O.Box404,
Tel Hanan, Israel 20302
T +972 (4) 8213393
F +972 (4) 8213388
www.taborelec.com

EUROPE

Austria
UET-Viena
T +43 15451 588
F +43 15451 464

Benelux (Belgium, The Netherlands and Luxembourg)
BFI Optilas B.V.
T +31 172 44 60 60
F +31 172 44 34 14

Bulgaria
New-Tek Ltd.
T +359 296 25286
F +359 268 7110

Cyprus
Sprel Ltd.
T +357 2237 7159
F +357 2237 7284

Czech Republic & Slovakia
Testovaci Technika s.r.o.
T +420 2 7478 237
F +420 2 7478 1285

Denmark
Altimo AS
T +45 8625 8899
F +45 8625 5889

France
Racial Instruments SAS
T +33 1 3923 2205
F +33 1 3923 2225

Germany
CompuMess Elektronik GmbH
T +49 89 321501-0
F +49 89 321501-11

Greece
American Technical
Enterprises S.A.
T +30 210 5240 740
F +30 210 5249 995

Hungary
ProMet Merestechnika
T +36 24 521 240
F +36 24 521 253

Italy
LP Instruments srl
T +39 2 4840 1713
F +39 2 4840 1852

Norway
Nortelco AS
T +47 2257 6100
F +47 2257 6130

Poland
Helmar
T +48 22 436 3106
F +48 22 436 3110

Romania
InterNET SRL
T +40 21 312 1662
F +40 21 312 1663

Russia
CDIP
T +7 0959 56 2022
F +7 0959 56 2022

Spain & Portugal
Instrumentos De Media SL
T +34 91 300 0191
F +34 91 388 5433

Sweden & Finland
Ferner Elektronik AB
T +46 8 760 8360
F +46 8 760 8341

Switzerland
Eistar Elektronik AG
T +41 56 427 1888
F +41 56 427 1976

United Kingdom & Ireland
SEMATRON UK Ltd.
T +44 1256 812222
F +44 1256 812666

**Yugoslavia (Bosnia, Croatia,
Macdonia, Montenegro, Serbia, Slovenia)**
Mechanic & Electronic
Measurement

T +39 1943 4254
F +39 1943 4251

ASIA PACIFIC & JAPAN

Australia
Trio Test & Measurement
Solutions

T +61 8 8234 0504
F +61 8 8234 0130

India
AIMIL Ltd.
T +91 11 2695 0001
F +91 11 2695 0011

Japan
TOYO Corporation
T +81 3 3279 0771
F +81 3 3246 0645

Korea
ITB Corporation
T +82 2 549 8501
F +82 2 549 8502

New Zealand
Electrotest Ltd.
T +64 9 448 2600
F +64 9 448 2611

Philippines
Sunley Inc.
T +63 2751 1216
F +63 2815 0730

Singapore, Thailand & Vietnam
Gold Lite Engineering Pte Ltd.
T +65 6273 0487
F +65 6273 5006

Taiwan, China & Hong Kong
Precision International Corp.

Taiwan
T +886 2 85124888
F +886 2 85124900

China & Hong Kong
T +86 21 64401300
F +86 21 64400524

AFRICA

South Africa
Channels Measurement
T +27 11 254 8362

F +27 11 254 8451

MIDDLE EAST

Israel
Dan-El Technologies Ltd.
T +972 3 9271888
F +972 3 9271666

Turkey
Alfatek Test &
Automation Ltd.
T +90 216 474 7355
F +90 216 474 7357

UNITED STATES US SALES & SUPPORT OFFICE

T +1 909 7970484

F +1 909 7974955

**IL, IN, IA, KS, KY, MN, MO,
NE, ND, SD, WI**
Base Eight, Inc.

T +1 847 670 1680

F +1 847 670 1737

**AZ, CO, ID, MT, NM, TX, EI,
Pasco, UT, WY**
Berry Technical Sales Inc.

T +1 303 665 9116

F +1 303 833 2924

AR, LA, OK, TX
Data Marketing Associates Inc.

T +1 972 661 0300

F +1 972 490 0836

OH, WV, PA, MI
Dytec EAST

T +1 330 405 8311

F +1 330 405 8313

DC, MD, VA
Eastern Instrumentation Corp.

T +1 410 884 7303

F +1 410 884 7306

PA, NJ
El Philly

T +1 856 231 0668

F +1 856 231 9022

HAW, NV, CA US SALES & SUPPORT OFFICE

T +1 510 713 9957

F +1 510 713 9958

NJ, NY
Tera Technologies Inc.

T +1 888 921-TERA

F +1 888 449 2799

CT, ME, MA, NH, RI, VT
Test-Rep Associates, Inc.

T +1 978 692 8000

F +1 407 839 0337

AL, FL, GA, MS, NC, SC, TN
W.A. Brown Instruments

T +1 407 648 9660

F +1 407 839 0337

CA, NV
W5 Inc.

T +1 949 212 1199

F +1 714 281 0767

CANADA
Testforce Systems Inc.

T +1 514 856 0970

F +1 514 856 6983

LATIN AMERICAS SALES & SUPPORT OFFICE

T +1 440 543 7710

F +1 440 543 9681



TABOR ELECTRONICS Ltd.

Specification

250MS/s Single-Channel Arbitrary Waveform Generator

Model WW2571



STANDARD WAVEFORMS

Waveforms: Sine, Triangle, Square, Pulse, Ramp, Sinc ($\text{Sinc}(x)/x$), Gaussian, Exponential, Repetitive Noise, DC, Half-Cycle.

Frequency Range: Waveform dependent

Source: Internal synthesizer

SINE

Frequency Range: 100µHz to 100MHz

Start Phase Range: 0-359.95°

Start Phase

Resolution: 0.05°

Harmonics Distortion:

	≤ 3Vpp	≤ 5Vpp	≤ 10Vpp
DC to 1MHz	-55dBc	-48dBc	-37dBc
1 to 10MHz	-50dBc	-43dBc	-35dBc
10 to 50MHz	-35dBc	-30dBc	-28dBc
50 to 100MHz	-28dBc	-25dBc	-23dBc

Non-Harmonic Distortion:

DC to 50MHz	-65dBc
50 to 100MHz	-60dBc

Total Harmonic Distortion:

DC to 20MHz	0.1%
-------------	------

Flatness (1kHz):

DC to 1MHz	1%
1MHz to 10MHz	3%
10MHz to 25MHz	5%
25MHz to 80MHz	10%
80MHz to 100MHz	15%

Phase Noise - Internal SCLK

100Hz Offset	-70dBc/Hz
1kHz Offset	-85dBc/Hz
10kHz Offset	-92dBc/Hz
100kHz Offset	-112dBc/Hz
1MHz Offset	-140dBc/Hz

TRIANGLE

Frequency Range: 100µHz to 32MHz

Start Phase Range: 0-359.9°

Start Phase

Resolution: 0.05°

SQUARE

Frequency Range: 100µHz to 100MHz

Duty Cycle Range: 0% to 99.9%

Rise/Fall Time:

DC to 10Vpp	<4ns
10Vpp to 16Vpp	<5ns

Aberration:

DC to 10Vpp	<5%+10mV
10Vpp to 16Vpp	<7%

PULSE

Frequency Range: 100µHz to 32MHz

Delay, Rise/Fall Time,

High Time Ranges: 0%-99.9% of period (each independently)

Rise/Fall Time:

DC to 10Vpp	<4ns
10Vpp to 16Vpp	<5ns

Aberration:

DC to 10Vpp	<5%+10mV
10Vpp to 16Vpp	<7%

RAMP

Frequency Range: 100µHz to 32MHz

Delay, Rise/Fall

Time Ranges: 0%-99.9% of period (each independently)

SINC (Sine(x)/x)

Frequency Range: 100µHz to 32MHz

“0 Crossings”: 4-100

GAUSSIAN

Frequency Range: 100µHz to 32MHz

Time Constant: 10-200

EXPONENTIAL PULSE

Frequency Range: 100µHz to 32MHz

Time Constant: -100 to 100

REPETITIVE NOISE

Bandwidth: 50MHz

DC

Range: -16V to 16V

HALF-CYCLE WAVEFORMS

Function Shape: Sine, Triangle, Square

Frequency Range: 100Hz to 2MHz

Phase Start Range

(Sine/triangle only): 0 to 359.9°

Start Phase

Resolution: 0.05°

Run Modes: Continuous, Triggered

Delay Between Half Cycles

(Continuous only): 500ns to 21s

Delay Resolution 20ns

ARBITRARY WAVEFORMS

Sample Rate:

Continuous Mode 1.5s to 250MS/s (typically 300MS/s)

All Other Modes 1.5s to 225MS/s (typically 250MS/s)

Vertical Resolution: 16 bits

Waveform Memory: 1M points (2M optional)

MEMORY SEGMENTATION

No. of Segments: 1 to 16k

Min. Segment Size: 16 points

Resolution: 4 points size increments from 16 to 1M points (2M optional)

SEQUENCED WAVEFORMS

Operation: Segments may be linked and repeated in a user-selectable order to generate extremely long waveforms. Segments are advanced using either a command or a trigger

ADVANCE MODES

Automatic Sequence Advance:

No trigger required to step from one segment to the next. Sequence is repeated continuously per a pre-programmed sequence table.

Stepped Sequence Advance:

Current segment is sampled continuously until a trigger advances the sequence to the next programmed segment and sample clock rate.

Single Sequence Advance:

Current segment is sampled the specified number of repetitions and then idles at the end of the segment. Next trigger samples the next segment the specified repeat count, and so on.

Mixed Sequence Advance:

Each step of a sequence can be programmed to advance either a) automatically (Automatic Sequence Advance), or b) with a trigger (Stepped Sequence Advance).

Sequencer Steps:

1 to 4096

Segment Loops:

1 to 1Meg

Specification

250MS/s Single-Channel Arbitrary Waveform Generator

Model WW2571



-i-Net-
THE INTERNATIONAL CERTIFICATION NETWORK

Minimum Segment

Duration: 500ns
Multi Sequence: Selectable sequence from 1 to 100

DIGITAL PATTERN OUTPUT

Pattern Size: 16-bits, LVDS levels differential, channel 1 only
Update Frequency: 100ppps to 250Mpps

COMMON CHARACTERISTICS

FREQUENCY

Resolution: 14 digits (limited by 1µHz)
Accuracy & Stability: Same as reference

10MHz REFERENCE CLOCK

Internal	0.0001% (1 ppm TCXO) initial tolerance over a 19°C to 29°C temperature range; 1ppm/°C below 19°C and above 29°C; 1ppm/year aging rate
External	10MHz TTL, 50% ±2% duty cycle

AMPLITUDE

Amplitude:	16mV to 16Vp-p into 50Ω; Double into open circuit								
Resolution:	4 digits								
Accuracy (1kHz):	<table border="0"> <tr> <td>16mV to 159.9mVp-p</td> <td>±(1% + 5mV)</td> </tr> <tr> <td>160mV to 1.599Vp-p</td> <td>±(1% + 10mV)</td> </tr> <tr> <td>1.6V to 11.99Vp-p</td> <td>±(1% + 70mV)</td> </tr> <tr> <td>12V to 16Vp-p</td> <td>±2%</td> </tr> </table>	16mV to 159.9mVp-p	±(1% + 5mV)	160mV to 1.599Vp-p	±(1% + 10mV)	1.6V to 11.99Vp-p	±(1% + 70mV)	12V to 16Vp-p	±2%
16mV to 159.9mVp-p	±(1% + 5mV)								
160mV to 1.599Vp-p	±(1% + 10mV)								
1.6V to 11.99Vp-p	±(1% + 70mV)								
12V to 16Vp-p	±2%								

OFFSET

Range:	0 to ±7.992V, into 50Ω
Resolution:	1mV
Accuracy:	±(1%+1% of Amplitude +5mV)

FILTERS

Type:	25MHz Bessel 50MHz Bessel 60MHz Elliptic 120MHz Elliptic
--------------	---

OUTPUTS

MAIN OUTPUT

Connector:	Front panel BNC, each channel
Impedance:	50Ω ±1%
Protection:	Short Circuit to Case Ground, 10s max

Standby:

Output On or Off (Output Disconnected)

SYNC OUTPUT

Connector:	Front panel BNC
Level:	TTL
Sync Type:	Pulse with Arbitrary and Standard Waves; LCOM in Sequence and Burst Modes (including Burst Modulation); Marker with Modulation Mode only, programmable position

DIGITAL WORD OUTPUTS

Connector:	Rear panel SCSI-2, 68-pin VHDCI
Word Width:	16 bit differential outputs, channel 1 only
Level:	LVDS

SAMPLE CLOCK OUTPUT

Connector:	Rear panel SMB
Level:	400mVp-p
Impedance:	50Ω

COUPLE OUTPUT

Connector:	Rear panel SMB
Level:	LVPECL
Impedance:	50Ω, terminated to +1.3V

INPUTS

TRIGGER INPUT

Connector:	Rear panel BNC
Impedance:	10kΩ
Slope:	Positive or Negative (selectable)
Programmable Level:	±5V
Sensitivity:	100mV
Damage Level:	±12V
Pulse Width:	≥10ns minimum

EXTERNAL REFERENCE INPUT

Connector:	Rear panel SMB
Frequency:	10MHz
Impedance:	10kΩ ±5%
Level:	TTL, 50% ±2% duty cycle

SAMPLE CLOCK INPUT

Connector:	Rear panel SMB
Input Level:	300mVp-p to 1Vp-p
Impedance:	50kΩ
Minimum Pulse Width:	4 ns

COUPLE INPUT

Connector:	Rear panel SMB
Input Level:	LVPECL
Impedance:	50Ω, terminated to +1.3V
Minimum Pulse Width:	4 ns

MODULATION

Carrier Waveform:	Sinewave
Modulation Source:	Internal
Inter-Channel Phase:	90° phase offset between channels
Run Modes:	Off (Outputs CW), Continuous, Triggered, Delayed Trigger, Burst, Re-trigger and Gated
Advance Source:	Front panel button, Software commands, Rear panel TRIG IN

FM

Carrier Waveform:	Sine wave
Carrier Frequency:	10MHz to 100MHz
Modulating Waveforms:	Sine, square, triangle, ramp
Modulating Frequency:	10MHz to 100kHz
Peak Deviation:	Up to 50MHz
Marker Position:	Programmable at selectable a frequency

ARBITRARY FM

Carrier Waveform:	Sine wave
Carrier Frequency:	10MHz to 100MHz
Modulating Waveform:	Arbitrary waveform
Modulating Waveform:	Sample Clock: 1S/s to 2.5MS/s
Frequency Array Size:	4 to 20000 frequencies
Marker Output:	Programmable at a selected frequency

AM

Carrier Waveform:	Sine wave
Carrier Frequency:	10MHz to 100MHz
Envelop Waveform:	Sine, square, triangle, ramp and Arbitrary ^(TBD)
Envelop Frequency:	10MHz to 100kHz
Modulation Depth:	0% to 100%

FSK

Carrier Waveform:	Sine wave
Carrier Frequency:	100µHz to 100MHz
Baud Rate Range:	1bits/sec to 10Mbits/sec
FSK Data Bits Length:	1 to 4096
Marker Output:	Programmable marker at a selected frequency

PSK

Carrier Waveform:	Sine wave
Carrier Frequency:	100µHz to 100MHz
Carrier phase:	0 to 359.99°
Baud Rate Range:	1bits/sec to 10Mbits/sec
FSK Data Bits Length:	1 to 4096
Marker Output:	Programmable marker at a selected phase

Specification

250MS/s Single-Channel Arbitrary Waveform Generator

Model WW2571



-i-Net
THE INTERNATIONAL CERTIFICATION NETWORK

FREQUENCY HOPPING

Carrier Waveform:	Sine wave
Carrier Frequency:	100µHz to 100MHz
Hop Table Size:	1 to 4096
Dwell Time Mode:	Fixed or Programmable for each step
Dwell Time:	200 ns to 21 s
Dwell Time Resolution:	20 ns
Hop Frequency:	100µHz to 100MHz
Marker Position:	Programmable on a selected frequency step

SWEEP

Carrier Waveform:	Sine wave
Sweep Step:	Linear, log or Arb
Sweep Direction:	Up or Down
Sweep Range:	10mHz to 100MHz
Sweep Time:	1.4s to 40s
Marker Output:	Programmable marker at a selected frequency.

TRIGGER CHARACTERISTICS

EXTERNAL

Source:	Rear panel BNC
Trigger Level:	±5V
Resolution:	1mV
Input Frequency:	DC to 5MHz
Min. Pulse Width:	>10ns
Slope:	Positive/Negative transitions, selectable
Trigger Jitter:	±1 sample clock period

DELAYS (Trigger input to waveform output)

System Delay:	6 sample clock cycles+150ns
Trigger Delay:	[(0; 200ns to 20s) + system delay]
Trigger Resolution:	20ns
Trigger Delay Error:	6 sample clock cycles+150ns +5% of setting

INTERNAL

Retrigger Delay:	200ns to 20s, Waveform end to waveform restart
Retrigger Delay Error:	3 sample clock cycles+20ns +5% of setting
Retrigger Delay Resolution:	20ns

MANUAL

Source:	Soft trigger command through the front panel or external interface
----------------	--

GATED MODE

External signal enables generator. First output cyclesynchronous with the active slope of the triggering signal. Last cycle of output waveform always comple

BURST

Waveforms:	Sine, Triangle, Square, Pulse, Ramp, Sinc (Sine(x)/x), Gaussian Pulse, Exponential Fall, Rising Pulse, Noise, DC.
Counted Burst Cycles:	1 to 1Meg, programmable

Source:

Manual, Internal or External

MULTI-INSTRUMENT SYNCHRONIZATION

Description:	Multiple instruments can be connected together and synchronized to provide multi-channel synchronization.
Initial Skew:	<±15 ns, depending on cable length and quality, typically with 1 meter coax cable.

GENERAL

Power Supply:	85 to 265Vac, 48-63 Hz
Power Consumption:	60W
Front Panel Display:	Color LCD, 3.5" reflective, 320 x 240 pixels, back-lit
Operating temperature:	0°C - 50°C
Humidity (non-condensing):	11°C - 30°C 85% 31°C - 40°C 75% 41°C - 50°C 45%
Storage temperature:	-40°C to + 70°C.
Interface:	Ethernet 10/100, USB 2.0 and GPIB standard
Language:	IEEE-488.2 - SCPI - 1993.0
Dimensions:	212 x 88 x 415 mm (WxHxD)
Weight:	Approximately 7 lb
Safety:	EN61010-1, 2nd revision
EMC:	CE marked. Designed to meet VDE 0411/03.81 and UL 1244
Reliability:	MTBF per MIL-HDBK-217E, 25°C, Ground Benign
Workmanship Standards:	Conform to IPC-A-610D
Supplied Accessories:	Power Cord, USB cable, CD containing Operating Manual, ArbConnection software and developer libraries.
Warranty:	5 years standard

ORDERING INFORMATION

MODEL	WW2571
250MS/s Single-Channel ArbitraryWaveform Generator	
OPTIONS	
2Meg:	2 Meg Memory
ACCESSORIES	
S-Rack mount:	19" Single Rack Mounting Kit
D-Rack mount:	19" Dual Rack Mounting Kit
Case Kit:	Professional Carrying Bag

Note: Options and Accessories must be specified at the time of your purchase.