

E. Ripley, Table,

Nº 7,291,

Patented Apr. 16, 1850.



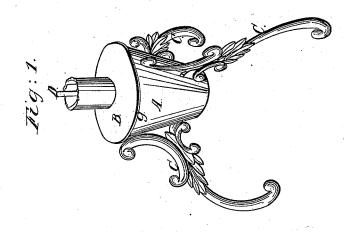

UNITED STATES PATENT OFFICE.

EZRA RIPLEY, OF TROY, NEW YORK.

CONSTRUCTION OF BASES FOR STANDS.

Specification of Letters Patent No. 7,291, dated April 16, 1850.

To all whom it may concern:

Be it known that I, EZRA RIPLEY, of Troy, in the county of Rensselaer and State of New York, have invented a new and improved mode of constructing metallic stands or bases used for the support of tables, stands, chairs, music-stools, mathematical instruments, &c.; and I do hereby declare that the following is a full, clear, and exact 10 description of the same, reference being had to the annexed drawings, making a part of this specification in which-

Figure 1 is a perspective view and Fig. 2 a vertical section through the same taken through one of the legs, the same letters indicate like parts in both figures.

The nature of my invention consists in

casting the whole base and firmly fastening it together by means of one central rod pass-20 ing from top to bottom.

To enable others skilled in the art to make and use my invention I will proceed to de-

scribe the same.

I employ a hollow base piece A, and a cap plate B, covering the same. On the legs (C, C, which may be any desired shape) there are hooks a, a, which hook into openings b, b, in the base (A,) and are pressed down and held in place by knobs projecting 30 from the cap plate, one of which is shown at c. For a permanent lateral stay I extend the top of the legs d, d, in toward the center in the manner of a lever held between two lugs e, e, projecting from the cap plate (B). To retain the said place in the tion with the base, there are projections g, g, the base. The To retain the said plate in its relative posi- 35 whole is firmly fastened together by means of a rod D, extending from the top of the table or stand to the bottom of the base (A) 40 and is fastened by means of a nut and screw

as represented.

The utility and advantage of the construction of metallic stands, &c., as above is evident, it being simple, and effectual in its 45 thorough security, and is cast and put together without any filing or fitting, as is common in cast articles of such nature, and is readily put together and taken apart, there being but one screw which secures 50 every part together, consequently it is readily put in the smallest practicable bulk for transportation.

Having thus described the construction and operation of my invention, what I claim 55 therein as new and desire to secure by Let-

ters Patent is-

The mode herein described of employing a base piece that the legs or feet may hook into, and be held firmly in place by the cap 60 plate and rod running through the center, the same being constructed and operating substantially in the manner and for the purpose described and represented.

EZRA RIPLEY.

 ${
m Witnesses}$:

E. L. Brundage, JOHN L. DAVY.